


SICON Bolted Cable Lug

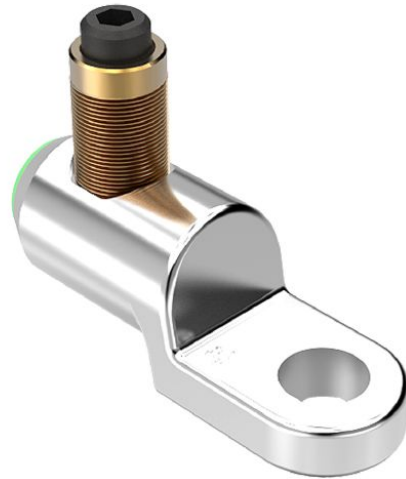

Picture may vary.

Technical Data

Article no.		332 604 012 00001
Conductor cross section area	(mm ²)	10 - 95
Conductor cross section Al solid circular	(mm ²)	10 - 95
Conductor cross section Cu solid circular	(mm ²)	10 - 95
Conductor cross section Al stranded circular compressed	(mm ²)	10 - 95
Conductor cross section Cu stranded circular compressed	(mm ²)	10 - 95
Conductor cross section Al stranded circular	(mm ²)	10 - 95
Conductor cross section Cu stranded circular	(mm ²)	10 - 95
Conductor cross section Al solid sector-shaped 90°	(mm ²)	50 - 95
Conductor cross section Al solid sector-shaped 120°	(mm ²)	50 - 70
Conductor cross section Al stranded sector-shaped 90°	(mm ²)	35 - 70
Conductor cross section Cu stranded sector-shaped 90°	(mm ²)	35 - 70
Conductor cross section Al stranded sector-shaped 120°	(mm ²)	35 - 50 (70 rounded)
Conductor cross section Cu stranded sector-shaped 120°	(mm ²)	35 - 50 (70 rounded)
Quantity of mounting holes		1

Dimensions

External diameter	(mm)	24
Internal diameter	(mm)	13
Total length	(mm)	68
Width of mounting lug	(mm)	24
Thickness of mounting lug	(mm)	9
Length of mounting lug	(mm)	30
Diameter of the mounting holes	(mm)	13