
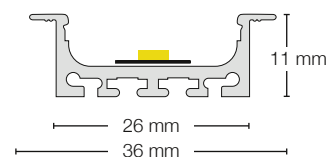
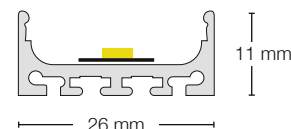


B1 Standard / B2 Recessed

SLC Scandinavian
Lighting Concept

- Standard extra low aluminum profile
- Recommended for indirect lighting due to short distance between LED-strip and cover (7,6 mm)
- Wide range of applications
- For surface or recessed installation
- Extended range of covers with a smooth surface
- Distance to cover: 7,6 mm

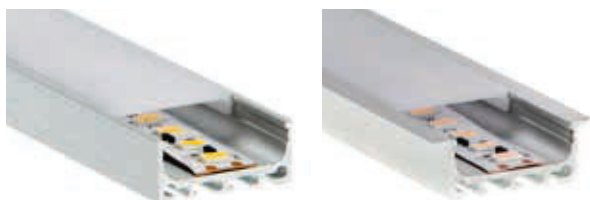

Art.no.	Article	Width	Height	Length	LED-strip's max. width
S40120	B1 Standard Extra Low	26 mm	11 mm	2 m	18 mm
S40121	B2 Recessed Extra Low	36 mm	11 mm	2 m	18 mm

Accessories

Art.no.	Accessories	Type
S41120	Cover B	Flat Clear 2 m
S41121	Cover B	Flat Opal 2 m
S41122	Cover B	Round Opal 2 m
S41123	Cover B	Square Opal 2 m
S43305	End Caps B1/B2	Flat
S43306	End Caps B1/B2	Round
S43307	End Caps B1/B2	Square

