

High Output 15W

SLC

Scandinavian
Lighting Concept

IP 20

IP 54

IP 67

CC

24VDC

2700 K

3000 K

4000 K


- Professional LED-strip with high efficiency
- Perfect for bigger projects, where light output is important
- Constant Current technology protects each LED diode against voltage drop and gives more uniform light on long distances

Integrated overheating protection

- Shall be installed in aluminum profiles, to ensure sufficient cooling and long product lifetime
- 126 LED diodes per meter make it easy to achieve uniform and smooth light line in any installation
- 3Ms adhesive tape on the backside of the strips ensures easy and quick installation
- Available in many lengths, colour temperatures and IP-rating options

Diodes: 126 LED pr. meter
Cutting point: Every 7. diode's (56 mm)
Connection: 2 meter cable on each end
Max length: 10 meter
Voltage: 24 VDC

Colour Rendering: CRI >80
MacAdam: 3
Beam angle: 120°
Operating temperature: -10°C ~ +45°C
Expected lifetime: 60 000 hours (L80B10)

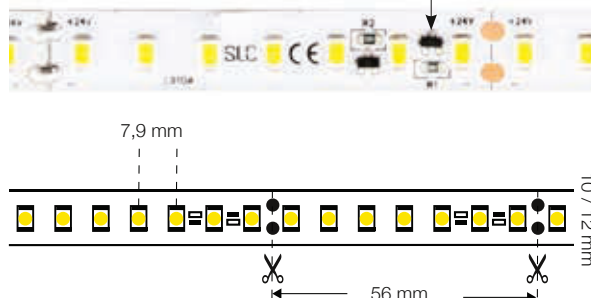

5 meter >>

Art.no.	Colour temp.	Lumen	Wattage	IP-grade	Length	Width	Height
S13044	2700K	1560 lm/m	15W/m	IP20	5 m*	10 mm	2 mm
S13045	3000K	1580 lm/m	15W/m	IP20	5 m*	10 mm	2 mm
S13046	4000K	1600 lm/m	15W/m	IP20	5 m*	10 mm	2 mm
S13047	2700K	1520 lm/m	15W/m	IP54	5 m	10 mm	2,5 mm
S13048	3000K	1540 lm/m	15W/m	IP54	5 m	10 mm	2,5 mm
S13049	4000K	1560 lm/m	15W/m	IP54	5 m	10 mm	2,5 mm
S13050	2700K	1520 lm/m	15W/m	IP67	5 m	12 mm	4 mm
S13051	3000K	1540 lm/m	15W/m	IP67	5 m	12 mm	4 mm
S13052	4000K	1560 lm/m	15W/m	IP67	5 m	12 mm	4 mm

10 meter >>

Art.no.	Colour temp.	Lumen	Wattage	IP-grade	Length	Width	Height
S103144	2700K	1560 lm/m	15W/m	IP20	10 m*	10 mm	2 mm
S103145	3000K	1580 lm/m	15W/m	IP20	10 m*	10 mm	2 mm
S103146	4000K	1600 lm/m	15W/m	IP20	10 m*	10 mm	2 mm
S103147	2700K	1520 lm/m	15W/m	IP54	10 m	10 mm	2,5 mm
S103148	3000K	1540 lm/m	15W/m	IP54	10 m	10 mm	2,5 mm
S103149	4000K	1560 lm/m	15W/m	IP54	10 m	10 mm	2,5 mm
S103150	2700K	1520 lm/m	15W/m	IP67	10 m	12 mm	4 mm
S103151	3000K	1540 lm/m	15W/m	IP67	10 m	12 mm	4 mm
S103152	4000K	1560 lm/m	15W/m	IP67	10 m	12 mm	4 mm

30 meter >>

Art.no.	Colour temp.	Lumen	Wattage	IP-grade	Length	Width	Height
S13904	2700K	1560 lm/m	15W/m	IP20	30 m	10 mm	2 mm
S13905	3000K	1580 lm/m	15W/m	IP20	30 m	10 mm	2 mm
S13906	4000K	1600 lm/m	15W/m	IP20	30 m	10 mm	2 mm