

CORAL LED EVO PLUS

LED GO!



LED |  | IP44 | IK10

TECHNICAL PARAMETERS

Light source:	LED GO!;
Ingress protection:	IP44;
Impact resistance:	IK10;
Nominal power [W]:	9.00;
Luminous flux [lm]*:	740 - 810
Colour temperature [K]:	3000; 4000;
Colour rendering index:	>80;
SDCM:	≤ 3;
Electrical protection class:	I;
Energy efficiency class:	A; A+;
Material of the body:	PP;
Diffuser material:	PC;
Diffuser type:	OPAL;
Optics material:	PMMA;
Mounting version:	surface; recessed;
Supply voltage [V]:	220 - 240;
AC voltage range [V]:	198 - 264;
DC voltage range [V]:	60;
Frequency [Hz]:	50 - 60;

*Tolerance +/- 10%

CHARACTERISTICS

Ceiling lights for ceiling or wall mounting. Luminaire design allows surface and concealed installation. The unique design allows replacement of the LED GO! (light source) module without having to replace the entire luminaire. Integrated design for easy installation. Surface-mounted luminaire allows cable termination.

Luminaires of the PLUS variant line are fitted with branded components of recognized global manufacturers. It features extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

This ceiling fixture is also available in the following variants:
- with a radio motion sensor.

APPLICATION

Suspended mounting board allows quick installation. Removable mounting board available on request as a service kit. Surface wiring. Holes for connection with surface installation, through-wiring possible.

CORAL LED EVO PLUS

LED GO!

AVAILABLE TYPES

[Click >> index, to see details](#)

CORAL LED EVO PLUS surface

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Energy efficiency class	Index
9	3000	740	OPAL		A	>> 223655
9	3000	740	OPAL	yes	A	>> 223662
9	4000	810	OPAL		A	>> 223679
9	4000	810	OPAL	yes	A	>> 223686

CORAL LED EVO PLUS recessed


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Energy efficiency class	Index
9	3000	740	OPAL		A	>> 223716
9	3000	740	OPAL	yes	A	>> 223723
9	4000	810	OPAL		A+	>> 223730
9	4000	810	OPAL	yes	A+	>> 223747

*Tolerance +/- 10%

ACCESSORIES

Name	Index
CORAL LED EVO PLUS 830 - SERVICE KIT	223778
CORAL LED EVO PLUS 830 RCR - SERVICE KIT	223792
CORAL LED EVO PLUS 840 - SERVICE KIT	223785
CORAL LED EVO PLUS 840 RCR - SERVICE KIT	223808

LUMINOUS INTENSITY DISTRIB. CURVE

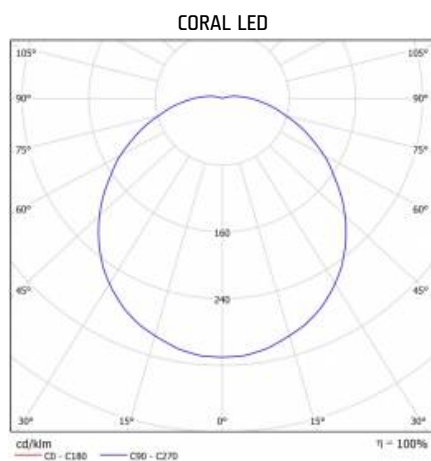

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2019-07-24



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



74/2018