


#### Download

DXF 2D  
- 746n.dxf  
Montaggi  
- oblò 12-18.pdf

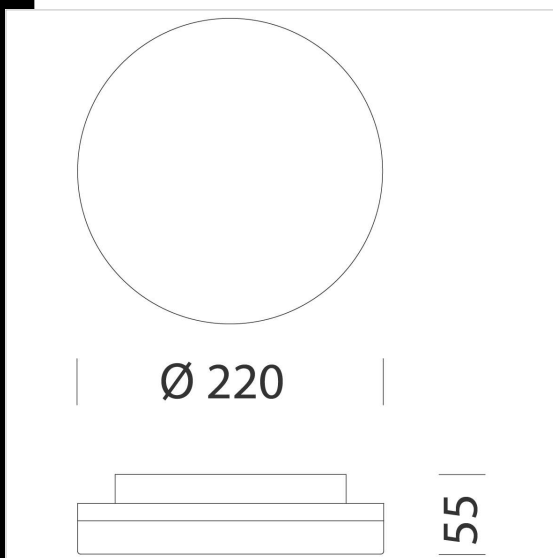

#### 746 - Oblò 2.0

Oblò 2.0 represents the evolution of one of Disano's flagship products, now available in a renovated design and upgraded technology to ensure even lower energy consumptions and higher LED light quality.

Oblò 2.0 includes a family of robust and reliable wall-mounted outdoors and indoors fixtures, featuring a self-extinguishing body in polycarbonate, with IP65 protection rating and double isolation.

The range of the Oblò fixtures includes lamps in different sizes and different power outputs to allow choosing the best solution for any need. High quality LED lighting, colour temperatures of 3000 K and 4000 K and good colour rendering (CRI 83) contribute to guaranteeing energy-efficient, visually pleasant and safe lighting.

The efficient use of light is further increased thanks to its presence sensor that makes the lamp work only when needed, hence further lowering energy consumptions.

Housing: vandal-resistant, self-extinguishing polycarbonate. Diffuser: In clear polycarbonate, anti-dazzle, vandal resistant. LED: Power factor >0.9. Luminous flux maintenance 80%: 33.000h (L80B20).

Photobiological safety class: Exempt group.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
112626-00	CLD CELL	0,56	LED-1444lm-4000K-CRI 83	15 W	BIANCO
112626-39	CLD CELL	0,56	LED-1328lm-3000K-CRI 83	15 W	BIANCO

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated