## Jack

**Round Jack Body** 



Round Jack masks






Oval Jack Body



Oval Jack masks





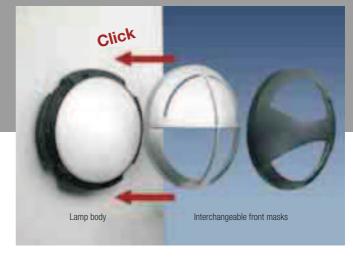

# A range of luminaires featuring a new assembling concept.

The body consists of a base, light source, wiring, glass diffuser and glass retaining trim. The body is then fixed to the wall and connected to the supply; you can then achieve the final look by changing the front covers (masks) which are available in different shapes and colours. Thus, each time the covers are changed, the luminaire will achieve a different personality.













### Jack - one body - many different appearances.

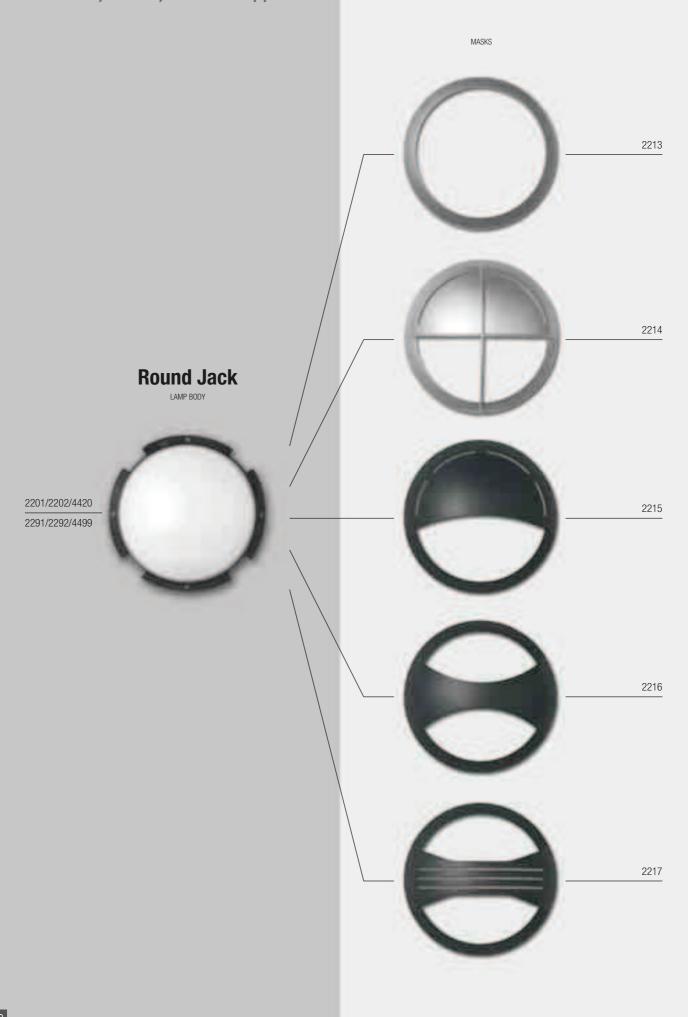



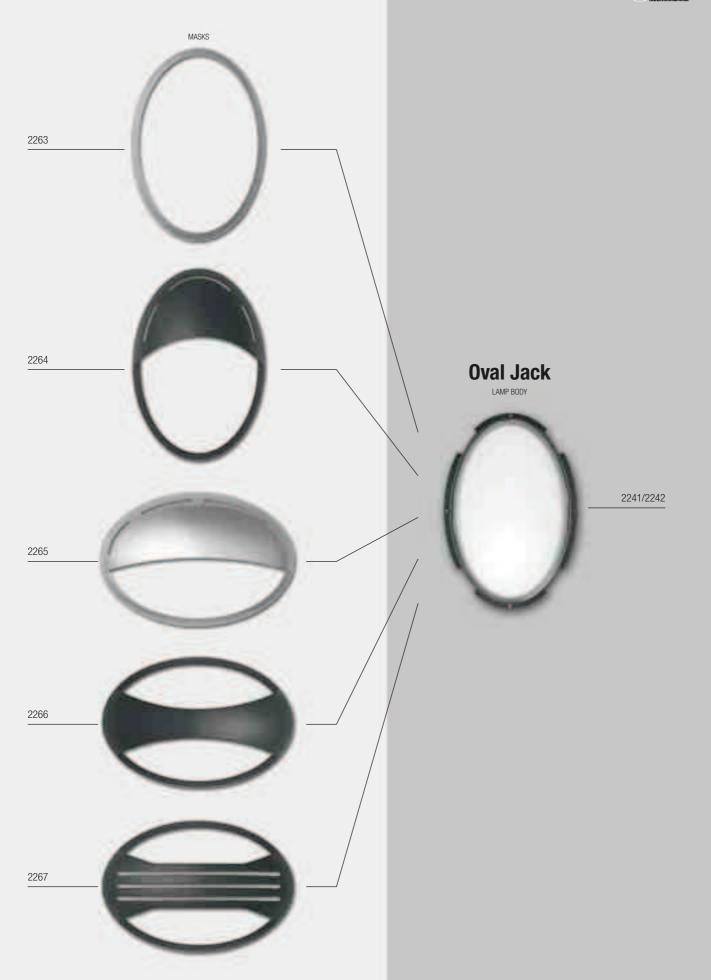



- Black polycarbonate body
- Complete with housing, wiring, glass and frame
- Opal glass diffuser
- Side or rear cable entry by means of gland or conduit
- · Through wiring allowed
- Stainless steel screws
- Code 4420-4499 1h/3h life
- IP 65 **♠ ▲ ▲ ﴿**
- ☐ Class II double insulation. Only codes 4420-4499 are in Class I
- Made according to EN 60598-1:08+A11:09 European standards €€





Colours NE

CODE N	0.	Lamp		W	L max	D	Н
2201	*		E 27 Dulux El	75 20	145 mm	274	108,5
2202	*	-	G23	2x9		274	108,5
4420	*	Emergency	2G7	2x9		274	108,5




#### **Round Jack - Vandalproof**

• Opal polycarbonate diffuser, UV resistant

CODE NO.		Lamp		W	L max	D	Н
2291	*	<b>© I</b>	E 27 Dulux El	75 20	145 mm	274	108,5
2292	*	<b>=</b>	G23	2x9		274	108,5
4499	*	Emergency	2G7	2x9		274	108,5

#### **Round Jack masks**



- Interchangeable masks with simple click fit to the body
- Masks only, body supplied separately












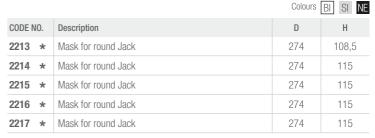

White colour for code 2213 only. Sample colour masks are available upon request.


#### **Jack U-post**

2215





- Extruded aluminium construction
- Base and head in die-cast aluminium
- Internal through wiring connection box
- Through wiring allowed
- Possibility of installing 2nd light on reverse side of post
- UV resistant paint on phosphochrome
- Made according to EN 60598-1:08+A11:09
  European standards ←



Colours	NE

CODE NO	).	Description	Н
3201	*	U-post for round Jack	1000

Post only, Jack fitting supplied separately.



- Black polycarbonate body
- Complete with housing, wiring, glass and frame
- Opal glass diffuser
- Side or rear cable entry by means of gland or conduit
- Through wiring allowed
- Stainless steel screws
- IP 65 **♠ ▲ ▲ ﴿**
- ☐ Class II double insulation
- Made according to EN 60598-1:08+A11:09 European standards ← €




Colours


Ν	Ε	
---	---	--

CODE NO.		Lamp		W	L max	А	В	Н
2241	*		E 27 Dulux El	60 20	173 mm	207	300	90,5
2242	*		G23	2x9		207	300	90,5

#### **Oval Jack masks**



- Interchangeable masks with simple click fit to the body
- Masks only, body supplied separately



B	<u>Н</u>

			Colours	BI SI NE
CODE NO.	Description	А	В	Н
2263 *	Mask for oval Jack	207	300	90,5
2264 *	Mask for oval Jack	207	300	101
2265 *	Mask for oval Jack	207	300	105,5
2266 *	Mask for oval Jack	207	300	105,5
2267 *	Mask for oval Jack	207	300	105,5


White colour for code 2263 only.

Sample colour masks are available upon request.

### **Jack inclined post**



- Extruded aluminium construction
- Base and head in die-cast aluminium
- Internal through wiring connection box
- Through wiring allowed
- UV resistant paint on phosphochrome
- Made according to EN 60598-1:08+A11:09 European standards €€



Colours NE

Н	H1
900	1220
900	1220

Post only, Jack fitting supplied separately.

Description

Inclined post for 1 oval Jack

□ Inclined double post for oval Jack

Photometric data: go to relevant chapter Energy class: go to code index

CODE NO.

3202 \*

3203 \*