


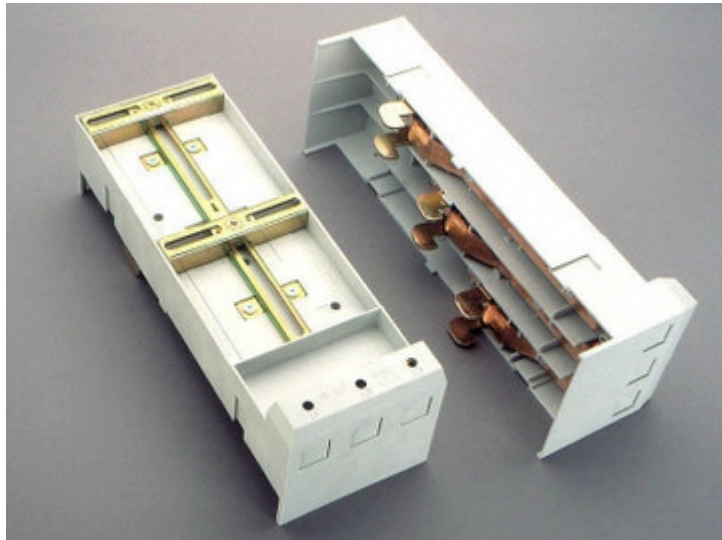

Description

Article

Part No.: 32 216

EQUES® 60Classic

adapter 250 A

terminals 95 mm² at bottom

110 x 320

System

60Classic

Product group 05

Untergruppe 36

pack size 1

EAN 4021267322168

catalog page 2015 : 2/17

Classification

eCl@ss 6.1 27370304

eCl@ss 7.1 27370304

ETIM 4.0 EC001531

ETIM 5.0 EC001531

Approvals

Standards

IEC 61439-1:2011

Approvals

CSA, UL, Germanischer Lloyd



Type number: 60250

UL file: E123577, UL category (for USA): NMTR2 <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR8 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

CCC approval: no certification required

Product data

Electrical data

Rated current (IEC): 250 A

Rated voltage (IEC) AC: 690 V

Rated current (UL): 250 A

Rated voltage (UL) AC: 600 V

rated isolation voltage U_i (AC): 800 V

Rated surge voltage U_{imp} : 6 kV

max. permitted voltage (IEC) AC: 800 V

max. permitted voltage (IEC) DC: 800 V

Mechanical data

W x H x D: 110 x 320 x 51

Weight: 164 kg/100

Poles: 3-pole

Material properties


Body:

temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 200,
halogen-free

Reference

Movable fastening rails with M4 slide nuts for safe mounting of the switching devices.

Accessories



32 937

slide nut M5

for 32 168, 32 214, 32 215, 32 216
