

URANUS PF



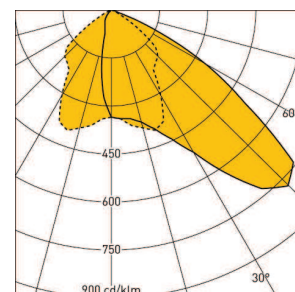


illustration may differ

Item No: 968 057 14 69

Floodlight with LED array. Robust luminaire housing made of weatherproof, fibreglass-reinforced polymer. Reflector housing made of cast aluminium, swivelling and locking up to 90°. Thermally separated lamp chamber and transformer chamber. Sealing system made of age-resistant, form-retaining silicone/synthetic rubber. With internal aluminium reflector. Integrated transformer, suitable for emergency lights. Ready for connection with two M20 cable entries on face side and through wiring. Additionally two concealed rear M20 cable entries. Mounting with aluminium mounting clamp.

Version	057N	System power	47 W
Lamp type	LED array	colour temperature	840/4000 K, Ra > 80
Lamp service life	L80 / B10 > 50.000 h L70 / B50 > 100.000 h	Luminous flux	5170 lm
Ambient temperature	-25°C to 45°C	Protection class	II
Lamp	2-lamp	Protection rating	IP65
Material housing	polymer/aluminium	Ballast	Electronic transformer 220 V - 240 V
Material cover	ESG, clear	Suitable for through-wiring	-
Light distribution	asymmetric beam	Installation type	ceiling mounting, wall mounting, single mounting
VDE	Yes	Impact strength	IK03
ENEC	Yes		

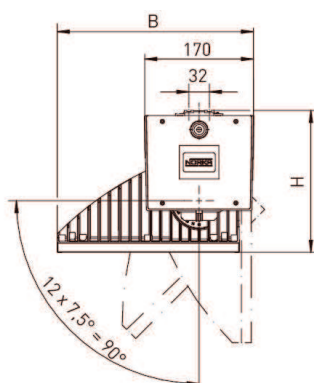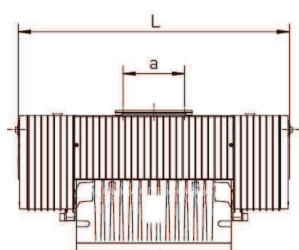

LOR 89.10 %

Dimensions

L	B	H	a	b	max. weight
424 mm	355 mm	170 mm	96 mm	-	5 kg