

URANUS PF 077N




7390LM, ESG, CLEAR, 840/4000K, ASYMMETRIC BEAM

LED-Array



Article No: 968 077 14 69

asymmetric beam

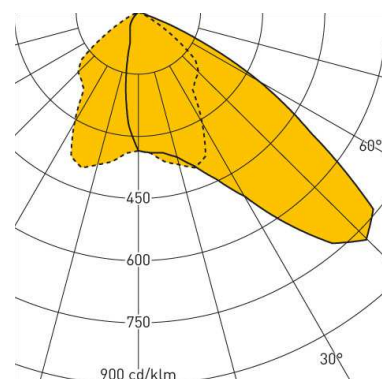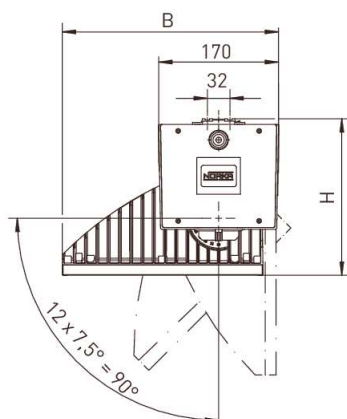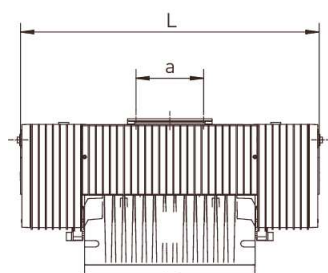

LOR: 89.10 %

DESCRIPTION

Floodlight with LED array. Robust luminaire housing made of weatherproof, fibreglass-reinforced polymer. Reflector housing made of cast aluminium, swivelling and locking up to 90°. Thermally separated lamp chamber and transformer chamber. Sealing system made of age-resistant, form-retaining silicone/synthetic rubber. With internal aluminium reflector. Integrated

transformer, suitable for emergency lights. Ready for connection with two M20 cable entries on face side and through wiring. Additionally two concealed rear M20 cable entries. Mounting with aluminium mounting clamp.

CHARACTERISTICS

attribute	value
Version	077N
Lamp type	LED array
Lamp service life	L80 / B10 > 50.000 h L70 / B50 > 100.000 h
Ambient temperature	-25°C to 35°C
Lamp	2-lamp
Material housing	polymer/aluminium
Material cover	ESG, clear
Light distribution	asymmetric beam
VDE	Yes
ENEC	Yes

attribute	value
System power	58 W
colour temperature	840/4000 K, Ra > 80
Luminous flux	7390 lm
Protection class	II
Protection rating	IP65
Ballast	Electronic transformer 220 V - 240 V AC/DC
Suitable for through-wiring	5 x 2,5 mm²
Installation type	ceiling mounting, wall mounting, single mounting
Impact strength	IK03
Suitable for emergency lighting	Yes

DIMENSIONS

L	W	H	a	b	max. Weight
424 mm	355 mm	170 mm	96 mm	-	5.4 kg

DOWNLOADS

EULUMDAT (.LDT)	IESNA (.IES)	mounting instructions (.PDF)	data sheet (.PDF)
-----------------	--------------	------------------------------	-------------------

LUMINAIRES FOLDER

Plase [sign in](#) to use luminaires folders.