

Euro standard 10.4

QIC 15SE

The QIC 15SE safety coupling is suitable for assembly tools, grinders and drills. The QIC 15SE is interchangeable with eurostandard nipples and can withstand rough handling.

- Exceptionally high flow.
- One-hand operation.
- Safety feature according to EN 983 / ISO 4414.
- Main market: Europe.




Nipple profile



Technical Data

Max flow capacity 63 l/s (0.5 bar ΔP)
 Economical air flow 41 l/s (0.2 bar ΔP)
 Max working pressure 10 bar
 Temperature range -20°C to +80°C

Flow chart. QIC 15SE M15 and NIP 15E F15

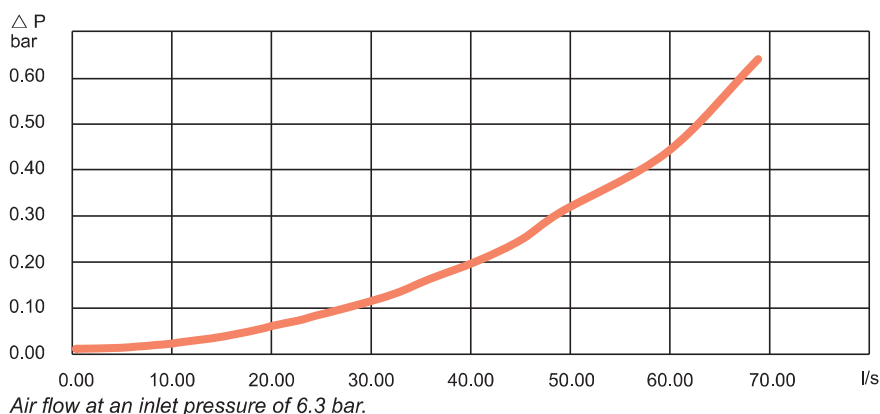

QIC 15SE and NIP 15E, 41 l/s (recommended air flow at 6.3 bar pressure)

Connection type	Coupling QIC 15SE	Ordering No.	Size		Connection type	Nipple NIP 15E	Ordering No.	Size	
			mm	in				mm	in
H – Hose 	H10	8202 1305 30	10	3/8	H – Hose 	H06	8202 1253 00	6.3	1/4
	H13	8202 1305 31	12.5	1/2		H08	8202 1253 05	8	5/16
	H16	8202 1305 32	16	5/8		H10	8202 1253 10	10	3/8
						H13	8202 1253 15	12.5	1/2
M – Male thread 	M08	8202 1305 33	1/4	BSP		H16	8202 1253 20	16	5/8
	M10	8202 1305 34	3/8	BSP		H20	8202 1253 23	19.0	3/4
	M15	8202 1305 35	1/2	BSP	M – Male thread 	M10	8202 1253 25	3/8	BSP
						M15	8202 1253 30	1/2	BSP
F – Female thread 						M20	8202 1253 34	3/4	BSP
					MT – Male taper thread 	MT08	8202 1253 35	1/4	BSPT
						MT10	8202 1253 40	3/8	BSPT
						MT15	8202 1253 45	1/2	BSPT
					F – Female thread 	F08	8202 1253 50	1/4	BSP
						F10	8202 1253 55	3/8	BSP
						F15	8202 1253 60	1/2	BSP
						F20	8202 1253 63	3/4	BSP