

SERVICE VALVE

E-valve with flange DN 20-40



Design features

- Resilient seated gate valve with smooth straight-through bore
- Flange sized and drilled according to EN 1092-2 | PN 16

Standard version: without handwheel and extension spindle
Special versions: on request

Suitable accessories


Suitable accessories: see page J 1/2

Handwheel: No. 7800
 Extension spindle: rigid No. 9101
 telescopic No. 9601
 Surface box: rigid No. 1550, No. 1650
 telescopic: No. 1850, No. 1851K
 Spindle extension: No. 7820
 Sealing cap: No. 2156, No. 2157, No. 2158
 Bolts: No. 8810, No. 8830, No. 8840
 Flat gasket: No. 3390, No. 3470

No. 4000
No. 4700



Order No.	Version	MOP (PN)	Dimensions/DN			
			20	25	32	40
4000	short	16				
4700	long EN 558-1GR 15					

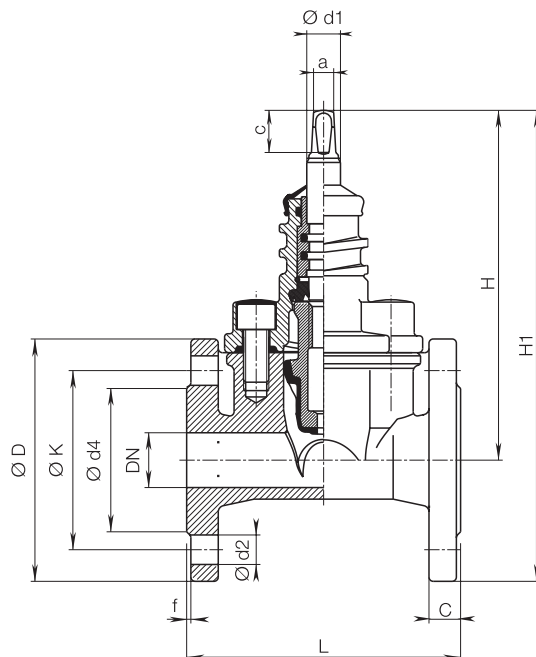

DN	MOP (PN)	Flange					Bolts			Spindle			Valve				Weight	
		Ø D	C	Ø K	Ø d4	f	Quantity	Thread	Ø d2	a	c	Ø d1	H	H1	L short	L long	short	long
20	10 16	115	16	75	58	2	4	M 12	14	10,3	20	16	164	223	130		4,2	
25	10 16	115	16	85	68	2	4	M 12	14				164	223	130		4,2	
32	10 16	150	18	100	78	2	4	M 16	19				200	275	140		6,6	
40	10 16	150	18	110	88	2	4	M 16	19				200	275	140	240	6,7	7,5



E. Hawle Armaturenwerke GmbH 4840 Vöcklabruck - Austria - Wagrainstraße 13
 Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - www.hawle.com

J 3/1

