

XR REDUCING FLANGE



Design features


- Made of ductile iron, epoxy powder coated
- Flange sized and drilled according to EN 1092-2
- Threaded bolts made of stainless steel
- The low profile enables transitions to be made between dimensions in the shortest possible space

Standard version: flange hole PN 10 (PN 16 on request)

DN	MOP (PN)	Bolts DN 1		Bolts DN 2		C	Weight	
		Qty.	Thread	Qty.	Thread			
65-50	10	4	M 16 x 50	4	M 16 x 50	47	5,6	
80-40		8	M 16 x 50	4	M 16 x 50	30	5,1	
80-50		8	M 16 x 50	4	M 16 x 50	29	5,6	
80-65		8	M 16 x 50	4	M 16 x 50	25	5,4	
100-50		8	M 16 x 50	4	M 16 x 50	27	5,5	
100-65		8	M 16 x 50	4	M 16 x 50	30	6,5	
100-80		8	M 16 x 50	4	M 16 x 50	47	8,4	
125-65		8	M 16 x 50	4	M 16 x 50	30	8,2	
125-80		8	M 16 x 50	8	M 16 x 50	30	8,0	
125-100		8	M 16 x 50	8	M 16 x 50	30	7,6	
150-100		8	M 20 x 60	8	M 16 x 50	30	12,0	
150-125		8	M 20 x 60	8	M 16 x 50	30	11,2	
200-150		8	M 20 x 60	8	M 20 x 60	30	17,2	
200-150		12	M 20 x 60	8	M 20 x 60	30	18,7	
250-200		12	M 20 x 60	8	M 20 x 60	32	20,0	
250-200		12	M 24 x 70	12	M 20 x 60	32	22,0	
300-250		12	M 24 x 70	12	M 24 x 70	33	32,4	

Other diameters on request

XR reducing flange „Type A” No. 0801

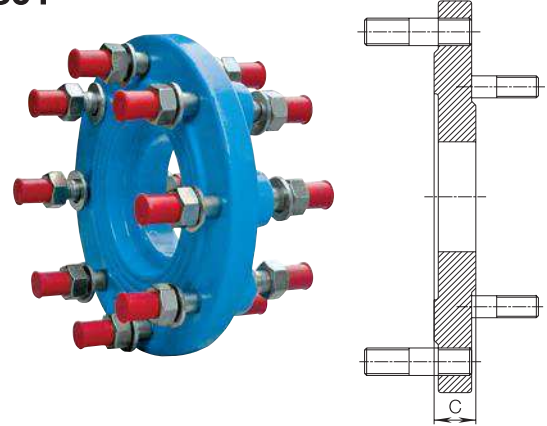


XR reducing flange „Type B” No. 0802

Standard version: flange hole PN 10 (PN 16 on request)

DN	MOP (PN)	Bolts DN 1		Bolts DN 2		C	Weight	
		Qty.	d	Qty.	Thread			
125-50	10	8	19	4	M 16 x 50	30	6,3	
150-50		8	23	4	M 16 x 50	30	11,0	
150-65		8	23	4	M 16 x 50	30	11,0	
150-80		8	23	8	M 16 x 50	30	10,7	
200-80		8	23	8	M 16 x 50	30	14,7	
200-80		12	23	8	M 16 x 50	30	14,5	
200-100		8	23	8	M 16 x 50	30	15,0	
250-125		12	23	8	M 16 x 50	31	13,7	
250-50		12	23	4	M 16 x 50	31	22,3	
250-50		12	28	4	M 16 x 50	31	22,3	
250-80		12	23	8	M 16 x 50	31	22,1	
250-80		12	28	8	M 16 x 50	31	22,1	
250-100		12	23	8	M 16 x 50	31	21,9	
250-150		12	23	8	M 20 x 60	40	18,6	
250-150		12	28	8	M 20 x 60	40	18,6	
300-100		12	23	8	M 16 x 50	31	27,1	
300-100		12	28	8	M 16 x 50	31	27,1	
300-200		12	23	8	M 20 x 60	32	24,8	
400-300		16	28	12	M 20 x 60	39	39,8	

Other diameters on request

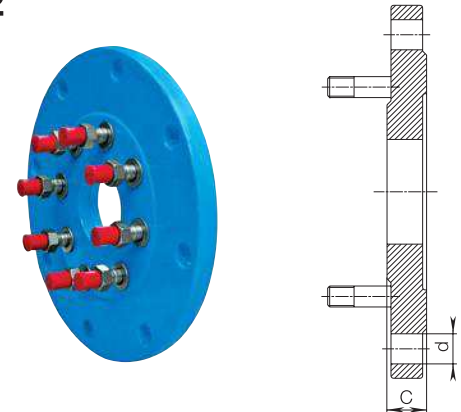

C 6/2



E. Hawle Armaturenwerke GmbH 4840 Vöcklabruck - Austria - Wagrain Straße 13
Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - www.hawle.com