

Atlas Copco standard EU

QIC 15S

The QIC 15S safety coupling is suitable for assembly tools, grinders and drills. The QIC 15S is easy to handle, strong and durable.

- Exceptionally high flow.
- One-hand operation.
- Safety feature according to EN 983 / ISO 4414.
- Main market: Europe.




Nipple profile



Technical Data

Max flow capacity 52 l/s (0.5 bar ΔP)
 Economical air flow 33 l/s (0.2 bar ΔP)
 Max working pressure 10 bar
 Temperature range -20°C to +80°C

Flow chart. QIC 15S M15 and NIP 15 F15

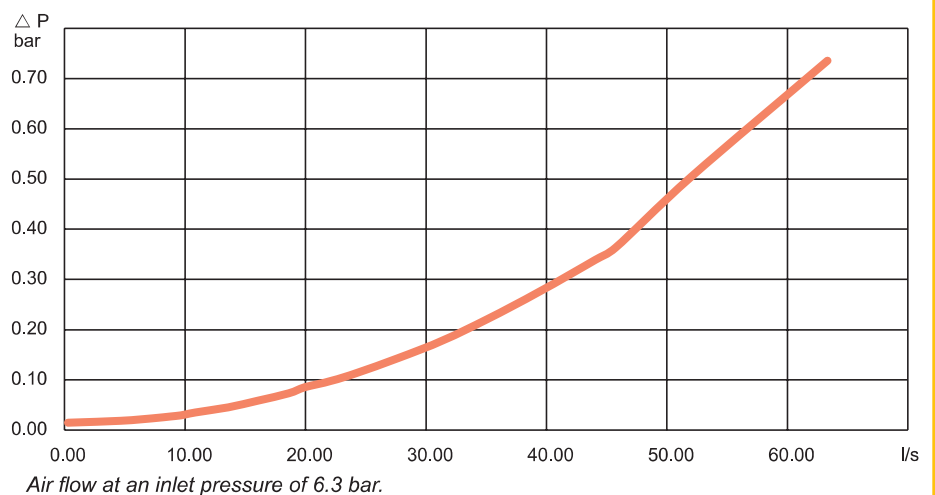

QIC 15S and NIP 15, 33 l/s (recommended air flow at 6.3 bar pressure)

Connection type	Coupling QIC 15S	Ordering No.	Size		Connection type	Nipple NIP 15	Ordering No.	Size	
			mm	in				mm	in
H – Hose 	H10	8202 1304 08	10	3/8	H – Hose 	H06	8202 1251 03	6.3	1/4
	H13	8202 1304 23	12.5	1/2		H08	8202 1252 28	8	5/16
	H16	8202 1304 33	16	5/8		H10	8202 1251 11	10	3/8
						H13	8202 1251 29	12.5	1/2
				H16		8202 1251 37	16	5/8	
M – Male thread 	M08	8202 1304 38	1/4 BSP	SH – Safety Hose ^a 	SH10	8202 1203 44	10	3/8	
	M10	8202 1304 48	3/8 BSP		SH13	8202 1203 51	12.5	1/2	
	M15	8202 1304 73	1/2 BSP		SH16	8202 1203 69	16	5/8	
F – Female thread 	F15	8202 1304 74	1/2 BSP	M – Male thread 	M10	8202 1251 45	3/8 BSP		
					M15	8202 1251 52	1/2 BSP		
				MT – Male taper thread 	MT08	8202 1251 60	1/4 BSPT		
					MT10	8202 1251 78	3/8 BSPT		
					MT15	8202 1251 86	1/2 BSPT		
				F – Female thread 	F08	8202 1251 94	1/4 BSP		
					F10	8202 1252 02	3/8 BSP		
					F15	8202 1252 10	1/2 BSP		

^a For hoses longer than 3 meters.