

830072EX



ATEX RAL 7035 GREY ROUND LIGHTING FIXTURE IN ALUMINIUM- STEEL WIRE PROTECTIVE CAGE, GLASS DIFFUSER 250V 60W 1V M20 IP65

Product data

Code ELECTROCOD:	2301
Series:	RINO-Ex
Min order quantity:	1
EAN code:	8014950010547
Weight:	0,936 KG

Reference standards and guidelines


Reference Standards:	EN 60079-0: 2009 EN 60079-15: 2010 EN 60598-1: 2008 EN 60598-2-1: 1989 EN 60079-31: 2009 EN 60529: 1993 EN 60529/A1: 2000 EN 60598-1/A11: 2008
----------------------	---

Marks:



Attachments

Dimensional (format .PNG):

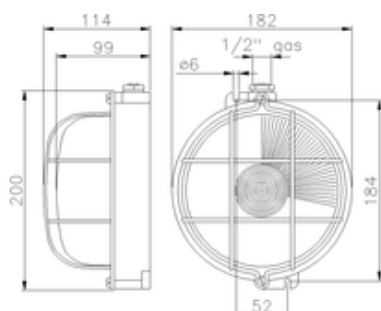

Technical data

ATEX application zone:	Zona/Zone 2, 21 and 22
Max Lamp Power:	28W W
Frequency:	50/60Hz
Atex Dust Class:	II 2D Ex tb IIIC T 85 °C Db IP65
Atex Gas Class:	II 3G Ex nA IIC 160°C (T3) Gc
Notified body (ATEX):	TÜV IT 12 ATEX 065 X
Nominal Operating Voltage:	
Lampholder type:	E27
Protection level:	IP65
Cable gland:	1
Notified body (CE):	

Customs code: 9405 40 95

Category of use ATEX DUST: II 3D 100°C IP65

Category of use ATEX GAS: II 3G EEx nA T5

Manufacturing Material: Aluminium alloy

Execution: WALL OR CEILING

Product Class: ROUND LIGHTING FIXTURE

Directive: 2011/65/UE (RoHS) -
2012/19/UE (RAEE-
WEEE)

DXF Drawing:  [830072.dxf](#)

94/9/CE
2006/95/CE