

CARLO GAVAZZI
Automation Components



Conductive Level Program

*Agriculture
Water Distribution/Treatment
Food and Beverage
Chemical*



Sense

Sense

A Complete Product Range to Fullfill All Your Level Monitoring Requirements

This new CL-series of intelligent conductive level controllers are used for level monitoring and pump control of conductive liquids. Typical applications are control in tanks, reservoirs, sewage plants, underground wells, mixing plants etc.

The CL controller has been developed with special attention to solutions that meet all the typical demands of the panel designer: usability, flexibility, affordability and size, minimizing space requirements and allowing for installation in small enclosures. Additionally the CL controllers provide all common level control functions.



Inventory Reduction



Space Optimization



Cost Saving



Simplified Setup

Electrode Probe

The CL-series are designed for use in combination with all the Carlo Gavazzi's level probes including the latest CLH3 probes (3 electrodes) and CLH5 probes (5 electrodes).

Multiple Application Settings

The controllers provide all common level control functions. Various adjusting possibilites enable the controller to perform either filling operations, emptying operations or combinations of the two.

This greatly increases the flexibility and adaptability of the controller for various applications.

Adjustments

The new CL-series offers all settings by means of Rotary Switches for function, selection and potentiometer for conductive settings.

Full Installation Details on Side of the Product

Ready-to-install: All installation details including function settings, wiring diagram and part number description are written on the side label.

LED Status Indication

All devices are equipped with LEDs to indicate power state and activity of the output relays.

Space-Saving Design

The CL models take up 75% less space than most similar models in the market.

The controller is available in compact 17.5 and 35 mm wide DIN-rail or 11 pin plug housing, with a depth of 60 mm and a length of 81 mm.

Approvals and Markings

The controller range has been UL certified and is CE marked.



Conductive Level Program



Applications

Agriculture

- Level control in slurry tanks, water tanks, reservoirs, sewage plants, underground wells and mixing plants
- Flow detection in pipes, channels, and irrigation systems



Chemical

- Level in chemical tanks
- Indication of liquid build-up due to filter blockages.
- Alarm control warning of abnormal or dangerously high or low levels.



Food & Beverage

- Level detection of liquids such as milk products, beer, wine, soft drinks and water, but also sticky or abrasive products such as chocolate or jam.



Water Distribution/Treatment

- For level and pump control
- Fill level control of purified city water, industrial water or sewage



- Hot water supply heated by solar energy
- Filling application of tank level



Sense


CLD1EA, 1-point Basic Level Controller

Level limit controller with an limited sensitivity range that covers the conductivity of most liquids like water porification, drainage, production lines of food / beverage, waste water treatment, etc.

Features

- Max./min. control of filling or emptying of liquids by means of one level and a time delay function.
- Compact housing for simple series mounting on standard rails in cabinet.
- Adjustable sensitivity by means of the potentiometer settings.
- SPDT relay.
- Time settings from 1 to 30 seconds for filling or emptying.

Operation Diagram

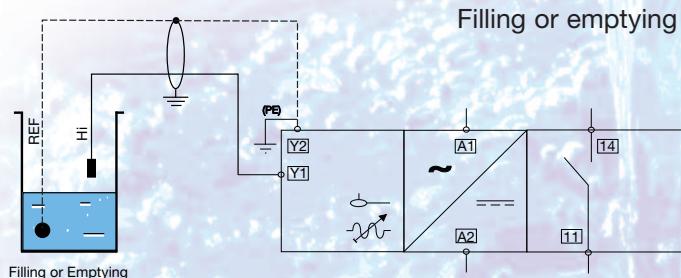

Technical data

Sensitivity	5kΩ to 150kΩ
Operating temperature	-20° to +50°C (-4° to + 122°F)
Input probe	1 + reference
Outputs	1 x DPDT relay
AC1	8A/250 VAC
Approvals	UL508


CLD2EA & CLP2EA, 2-point Level Controller

Level limit controller with an extended sensitivity range that covers the conductivity of most liquids such as chemicals, sewage water, sea water, distilled water, etc.

Features

- Max./min. control of filling or emptying (charging or discharging) of liquids between two levels.
- Compact housing for simple in-line mounting on standard DIN-rail or 11-pin plug-in socket.
- Extended and adjustable sensitivity by means of potentiometer and 3 sensitivity ranges.
- DPDT relay.

Operation Diagram

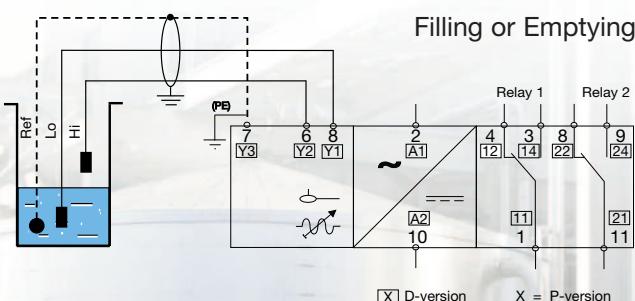

Technical data

Low sensitivity	250Ω to 5kΩ
Medium sensitivity	5kΩ to 100kΩ
High sensitivity	50kΩ to 500kΩ
Operating temperature	-20° to +50°C (-4° to + 122°F)
Input probes	2 + reference
Outputs	1 x DPDT relay
AC1	8A/250 VAC
Approvals	UL508

Conductive Level Program

CLP2FA, 2-point Level Controller, Cascade Coupling


Level limit controller with an extended sensitivity range that covers the conductivity of most liquids such as water purification, drainage, production lines of food / beverage, waste water treatment, distilled water, etc.



Features


- Max./min. control of filling or emptying of liquids between two levels.
 - Compact housing for simple in-line mounting with 11-pin plug-in socket.
 - Extended and adjustable sensitivity by means of potentiometer and 3 sensitivity ranges.
 - SPDT relay.
 - Master/slave system for cascade connecting of up to seven systems.

Operation Diagram

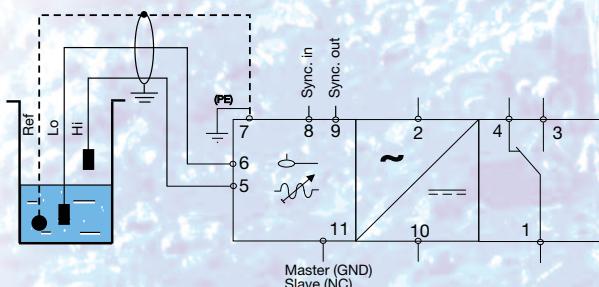

Technical data


Low sensitivity	250Ω to 5KΩ
Medium sensitivity	5kΩ to 100KΩ
High sensitivity	50kΩ to 500KΩ
Operating temperature	-20° to +50°C (-4° to + 122°F)
Input probes	2 + reference
Outputs	1 x DPDT relay
AC1	8A/250 VAC
Approvals	UL508

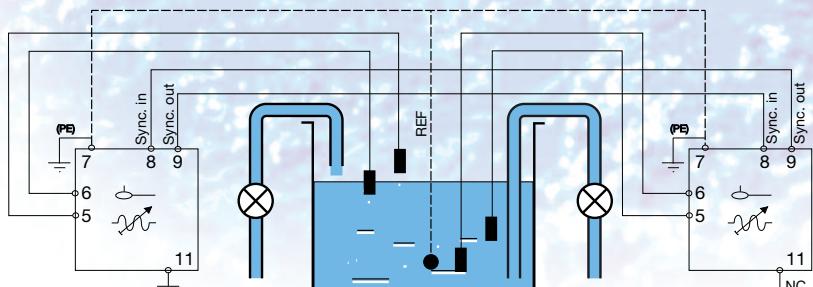

System A, Filling Master

System B, Emptying Slave

Filling and emptying with more systems in one common tank

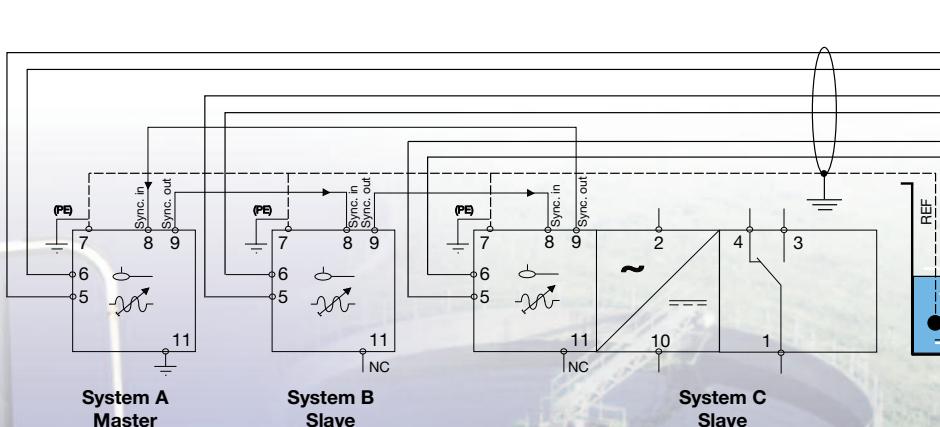

System A
Master

System B Slave

System C Slave

Multilevel application in one tank


CLD4MA & CLP4MA, 2 to 4-point Level Controller

Level limit controller with all common application operations implemented. The controller can handle up to two filling operations, two emptying operations or more combinations of these. The controller has an extended sensitivity range that covers the conductivity of most liquids such as chemicals, sewage water, sea water, distilled water, etc.

Features


- Up to four different levels in one or two individual systems.
- Multiple application operations by means of rotary switch settings such as, Tank - Well application, direct Input - Output, Filling or Emptying with or without HiHi or LoLo alarm output.
- Compact housing for simple in-line mounted on standard DIN-rails or 11-pin plug-in socket.
- Extended and adjustable sensitivity by means of potentiometer and 3 sensitivity ranges.
- HiHi or LoLo alarm functions.

Operation Diagram

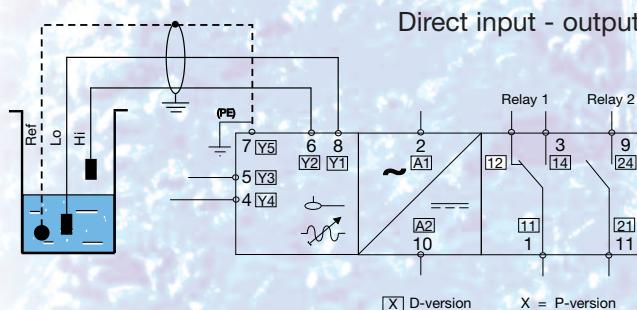


Technical data

Low sensitivity	250Ω to 5KΩ
Medium sensitivity	5kΩ to 100KΩ
High sensitivity	50kΩ to 500KΩ
Operating temperature	-20° to +50°C (-4° to + 122°F)
Input probes	4 + reference
Outputs	1 DPDT & 1 SPST
AC1	8A/250 VAC
Approvals	UL508

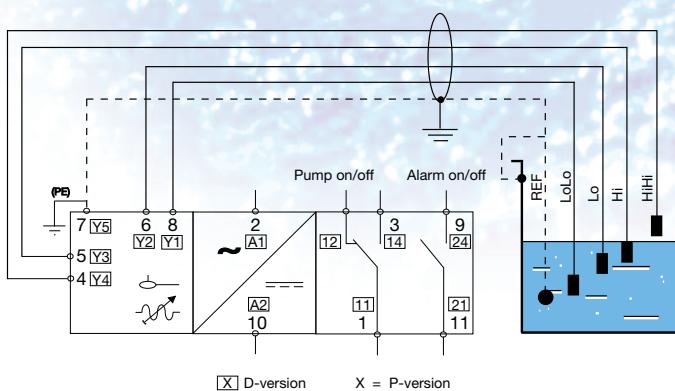


Filling or emptying with HiHi and LoLo alarms

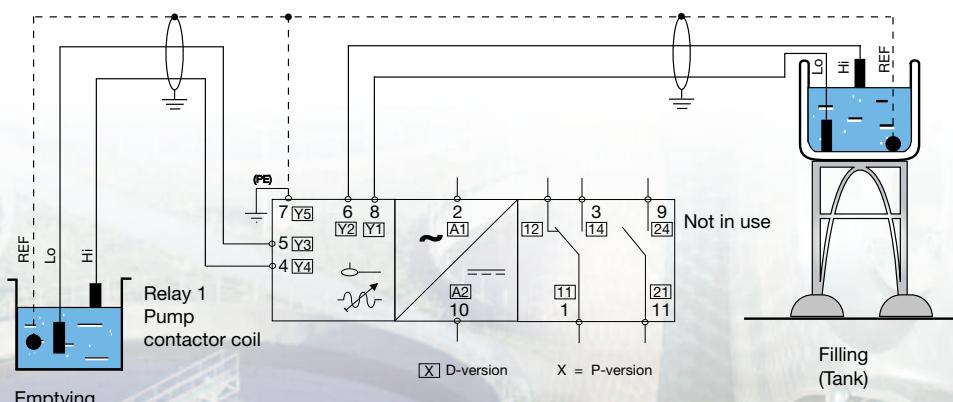

Tank - Well



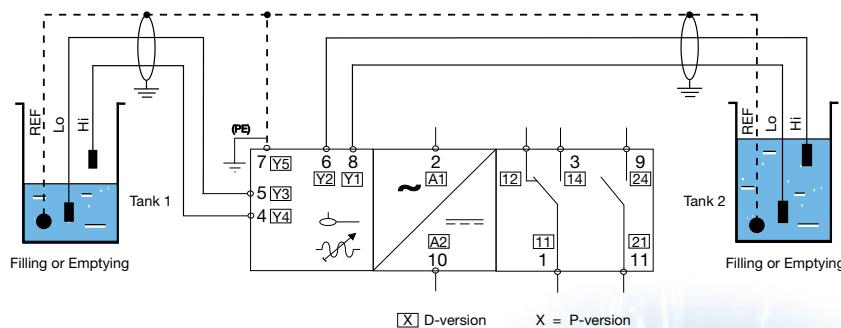

Filling or Emptying -
Fill - Fill,
Fill - Emptying or
Emptying - Emptying

CLH3 & CLH5 for Head Mounting

Flexible conductive level probe that can accomodate up to five rods for four different levels of control. The rods are available with coated isolation material for aggressive or sticky mediums prone to build up. Operating levels in the tank can be easily modified by extending or cutting the length of the electrodes shorter.

Features

- Mounting probe head for up to four different levels
- User-defined electrode length
- Isolated or unisolated electrodes



Technical Data Probe Head

Material	Polypropylene
Electrode connection	Screw terminals
Degree of protection	IP65 (Housing) IP68 (Elec. Conn.)
Operating Temperature	-20° to +70°C (-4° to +158°F)

Technical Data Electrodes

Material	Stainless steel AISI316/DIN1.4401
Length	1000 mm
Diameter	ø4mm
Isolation	Kynar or Polyolefine

Level Controller

Mounting	Relay	Supply 24 VAC/DC	Supply 115 VAC	Supply 230 VAC
CLD1, 1-point Basic Level Controller				
DIN-rail	SPST	CLD1EA1CM24		
CLD2 & CLP2, 2-point Level Controller				
DIN-rail	DPDT	CLD2EA1CM24	CLD2EA1C115	CLD2EA1C230
11-p circular plug	DPDT	CLP2EA1CM24	CLP2EA1C115	CLP2EA1C230
CLP2, 2-point Level Controller, Cascade Coupling				
11-p circular plug	SPDT	CLP2FA1BM24	CLP2FA1B115	CLP2FA1B230
CLD4 & CLP4, 2 to 4 point Level Controller				
DIN-rail	SPDT + SPST	CLD4MA2DM24	CLD4MA2D115	CLD4MA2D230
11-p circular plug	2 SPST	CLP4MA2AM24	CLP4MA2A115	CLP4MA2A230

OUR SALES NETWORK IN EUROPE

AUSTRIA - Carlo Gavazzi GmbH
Ketzergasse 374, A-1230 Wien
Tel: +43 1 888 4112
Fax: +43 1 889 10 53
office@carlogavazzi.at

BELGIUM - Carlo Gavazzi NV/SA
Schaarbeeklei 213/3, B-1800 Vilvoorde
Tel: +32 2 257 4120
Fax: +32 2 257 41 25
sales@carlogavazzi.be

DENMARK - Carlo Gavazzi Handel A/S
Over Hadstenvej 40, DK-8370 Hadsten
Tel: +45 89 60 6100
Fax: +45 86 98 15 30
handel@gavazzi.dk

FINLAND - Carlo Gavazzi OY AB
Petaksentie 2-4, FI-00661 Helsinki
Tel: +358 9 756 2000
Fax: +358 9 756 20010
myynti@carlogavazzi.fi

FRANCE - Carlo Gavazzi Sarl
Zac de Paris Nord II, 69, rue de la Belle
Etoile, F-95956 Roissy CDG Cedex
Tel: +33 1 49 38 98 60
Fax: +33 1 48 63 27 43
french.team@carlogavazzi.fr

GERMANY - Carlo Gavazzi GmbH
Pfnorstr. 10-14
D-64293 Darmstadt
Tel: +49 6151 81000
Fax: +49 6151 81 00 40
info@gavazzi.de

GREAT BRITAIN - Carlo Gavazzi UK Ltd
7 Springlakes Industrial Estate,
Deadbrook Lane, Hants GU12 4UH,
GB-Aldershot
Tel: +44 1 252 339600
Fax: +44 1 252 326 799
sales@carlogavazzi.co.uk

ITALY - Carlo Gavazzi SpA
Via Milano 13, I-20020 Lainate
Tel: +39 02 931 761
Fax: +39 02 931 763 01
info@gavazziacbu.it

NETHERLANDS - Carlo Gavazzi BV
Wijkermeerweg 23,
NL-1948 NT Beverwijk
Tel: +31 251 22 9345
Fax: +31 251 22 60 55
info@carlogavazzi.nl

NORWAY - Carlo Gavazzi AS
Melkeveien 13, N-3919 Porsgrunn
Tel: +47 35 93 0800
Fax: +47 35 93 08 01
gavazzi@carlogavazzi.no

PORTUGAL - Carlo Gavazzi Lda
Rua dos Jerónimos 38-B,
P-1400-212 Lisboa
Tel: +351 21 361 7060
Fax: +351 21 362 13 73
carlogavazzi@carlogavazzi.pt

SPAIN - Carlo Gavazzi SA
Avda. Iparragirre, 80-82,
E-48940 Leioa (Bizkaia)
Tel: +34 94 480 4037
Fax: +34 94 480 10 61
gavazzi@gavazzi.es

SWEDEN - Carlo Gavazzi AB
V:a Kyrkogatan 1,
S-652 24 Karlstad
Tel: +46 54 85 1125
Fax: +46 54 85 11 77
info@carlogavazzi.se

SWITZERLAND - Carlo Gavazzi AG
Verkauf Schweiz/Vente Suisse
Sumpfstrasse 32,
CH-632 Steinhausen
Tel: +41 41 747 4535
Fax: +41 41 740 45 40
info@carlogavazzi.ch

OUR SALES NETWORK IN NORTH AMERICA

USA - Carlo Gavazzi Inc.
750 Hastings Lane,
USA-Buffalo Grove, IL 60089,
Tel: +1 847 465 6100
Fax: +1 847 465 7373
sales@carlogavazzi.com

CANADA - Carlo Gavazzi Inc.
2660 Meadowvale Boulevard,
CDN-Mississauga Ontario L5N 6M6,
Tel: +1 905 542 0979
Fax: +1 905 542 22 48
gavazzi@carlogavazzi.com

MEXICO - Carlo Gavazzi Mexico S.A. de
C.V.
Calle La Montaña no. 28, Fracc. Los Pastores
Naucalpan de Juárez, EDOMEX CP 53340
Tel & Fax: +52.55.5373.7042
mexicosales@carlogavazzi.com

OUR SALES NETWORK IN ASIA AND PACIFIC

SINGAPORE - Carlo Gavazzi Automation
Singapore Pte. Ltd.
61 Tai Seng Avenue #05-06
UE Print Media Hub
Singapore 534167
Tel: +65 67 466 990
Fax: +65 67 461 980

MALAYSIA - Carlo Gavazzi Automation
(M) SDN. BHD.
D12-06-G, Block D12,
Pusat Perdagangan Dand 1,
Jalan PJU 1A/46, 47301 Petaling Jaya,
Selangor, Malaysia.
Tel: +60 3 7842 7299
Fax: +60 3 7842 7399

CHINA - Carlo Gavazzi Automation
(China) Co. Ltd.
Rm. 2308 - 2310, 23/F,
News Building, Block 1,
1002 Shennan Zhong Road,
Shenzhen, China
Tel: +86 755 83699500
Fax: +86 755 83699300

HONG KONG - Carlo Gavazzi
Automation Hong Kong Ltd.
Unit 3 12/F Crown Industrial Bldg.,
106 How Ming St., Kowloon,
Hong Kong
Tel: +852 23041228
Fax: +852 23443689

OUR PRODUCTION SITES

Carlo Gavazzi Industri A/S
Hadsten - **DENMARK**

Carlo Gavazzi Automation
(Kunshan) Co., Ltd.
Kunshan - **CHINA**

Carlo Gavazzi Ltd
Zejtun - **MALTA**

Carlo Gavazzi Controls SpA
Belluno - **ITALY**

Uab Carlo Gavazzi Industri Kaunas
Kaunas - **LITHUANIA**

HEADQUARTERS

Carlo Gavazzi Automation SpA
Via Milano, 13 - I-20020
Lainate (MI) - **ITALY**
Tel: +39 02 931 761- Fax: +39 02 931 763 01
info@gavazziacbu.it

Sense Switch Control Fieldbus EcoEnergy

CARLO GAVAZZI
Automation Components

Carlo Gavazzi SpA
Via Milano, 13 - 20020 Lainate (MI) - **ITALY**
Tel: +39 02 931 761- Fax: +39 02 931 763 01
info@gavazziacbu.it

Further information on
www.gavazziautomation.com - www.carlogavazzi.com

