


- LED 1: Versorgungsspannung
- LED 2: T-Port 100 Mbit/s
- LED 3: LNK/ACT
- 4: 5 x RJ-45
(10/100BASE-TX-Ports)

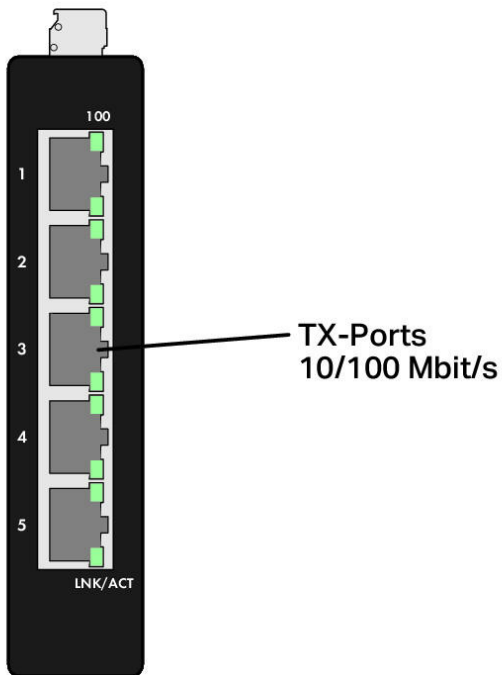

Item description

The 852-111 is a 5-port 10/100Base-TX industrial ETHERNET switch supporting Auto-Negotiation and Auto-MDI-/MDI-X detection for each port.

Using the switch's 5 ports, several segments can be created to reduce the network load, while providing a dedicated bandwidth to each user node. The 852-111 switch is a cost-effect solution to keep up with the constant demands of IP-based, industrial communication needs.

The switch is easy to configure and install and is best suited for small to medium-sized networks.

Features:

- 5 ETHERNET ports, 10/100 Mbps autonegotiation
- Front-panel diagnostic LEDs
- Supports Auto-MDI/MDI-X functions
- Full/half-duplex transfer modes for each port
- Store-and-forward switching method
- Integrated address look-up table, supports 2000 absolute MAC addresses
- Overvoltage protection
- IEEE 802.3x flow control in full-duplex mode
- DIN-35 rail mounting



Data

Technical Data

Switching mode	Store-and-forward, non-blocking
Number of 100Base-TX ports	5
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control
MAC table (large)	2000 addresses
Jumbo Frame Size	1536 Byte
Supply voltage	DC 18 ... 30 V
Energy consumption max.	3 W
Baud rate	Copper cable: 10/100Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5 or higher, 100 m maximum cable length
Topology	Star
Indicators	Device: LED (PWR) green: Power supply; per port: LED (100, LNK /ACT) green: Status 100 Mbps, LNK/ACT port 1 ... 5

Connection data

Connection technology: communication/fieldbus	Copper cable: 5 x RJ-45
Connection technology: supply	1 x im Gerät verbaute Stiftleiste: 231-433/001-000, mitgelieferte Federleiste (Steckverbinder MCS): 231-103/026-000

Geometrical Data

Width	23.4 mm / 0.921 inch
Height from upper-edge of DIN-35 rail	81 mm / 3.189 inch
Depth	109.2 mm / 4.299 inch

Mechanical data

Weight	352 g
Color	black
Housing material	Sheet steel

Environmental Requirements

Surrounding air (operating) temperature	-40 ... 70 °C
Surrounding air (storage) temperature	-40 ... 80 °C
Degree of protection	IP30
Relative air humidity (no condensation)	95 %
Type of mounting	DIN-35 rail
Vibration resistance	acc. to IEC 60068-2-6
Shock resistance	acc. to IEC 60068-2-27
Fire load	5.28 MJ

**Commercial data**

Country of Origin	TW
GTIN	4045454847593
Customs Tariff No.	85176200000
Product Group	27 (Special components I/O)

Ship Approvals

Logo	Approval	Certificate name
	DNV DNV Germany GmbH	A-14050

Subject to changes.