



470246EX

ATEX WALL-MOUNTING INTERLOCKED SOCKET-OUTLET IN MODULAR INSULATING ENCLOSURE 32A 380V 3P+N+E 6H IP67



Product data

Code ELECTROCOD:	2300
Series:	TAIS-Ex
Min order quantity:	1
EAN code:	8014950008636
Weight:	3,027 KG

Reference standards and guidelines

Reference Standards:	EN 60529: 1991 + A1: 2000 EN 60309-4: 2008 EN 60079-0: 2009 EN 60079-15: 2010 EN 60079-31: 2009 EN 60309-1 -2000:A1 + 2008:A2 EN 60309-2 -2000:A1 + 2008:A2
----------------------	---

Marks:




Attachments

Dimensional (format .PNG):

Technical data

ATEX application zone:	Zona/Zone 2, 21 and 22
Frequency:	50-60Hz
Atex Dust Class:	II 3D Ex tc IIIC T100°C Dc IP66
Notified body (ATEX):	TÜV IT 13 ATEX 049 X
Atex Gas Class:	II 3G Ex nR IIC T6 Gc
Nominal Operating Voltage:	400V
Atex Gas Nominal Current:	32 A
Protection level:	IP66
Notified body (CE):	
Customs code:	8536 69 90
Atex Dust Nominal Current:	32 A
Poles:	3P+N+ $\frac{1}{\text{PE}}$
Clock Position:	6 h
Manufacturing Material:	Thermosetting
Nominal current:	32A (2D) 25A (3G) A
Execution:	WALL MOUNTING
Product Class:	SOCKET
Directive:	94/9/CE 2006/95/CE 2004/108/CE

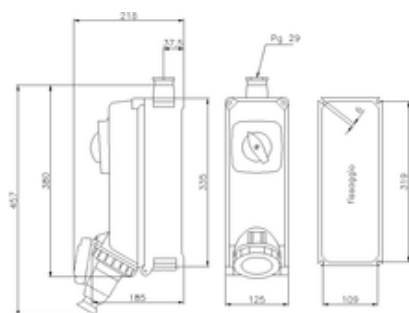

DXF Drawing:  [472811.dxf](#)