

STEALTH™ COVERLITE

PRODUCT CODE: ASA940-0__ - __00

LIGHTWEIGHT SAFETY SPECTACLE FOR USE WITH PRESCRIPTION EYEWEAR

TECHNICAL
SPECIFICATION

EYE & FACE PROTECTION

INSTRUCTIONS FOR USE

In use ensure that the safety spectacles fit comfortably and securely on the head

Ensure that the safety spectacles are in place, before entering the hazard area

STEALTH™ COVERLITE FEATURES & PERFORMANCE

The Stealth™ Coverlite has a stylish and spacious design that allows them to comfortably fit over prescription eyewear whilst having a modern look unlike bulkier overspectacles.

The Stealth™ Coverlite uses next generation moulding techniques to create ultra thin, ultra strong, optically perfect lenses making the Stealth™ Coverlite the lightest overspectacle available.

The robust, low base, minimum curve, optical Class 1 lens provides optimal vision to the wearer.

The arms of the Stealth™ Coverlite are pantoscopic so that they can be angled above the arms of prescription eyewear. The arms can have (depending on the model) soft grip pads on them to create a secure and comfortable fit.

The Stealth™ Coverlite frame is flexible and springy to fit any head size and create a secure fit.

Two levels of coating available K Class Anti-Scratch or KN Class Anti-Scratch and Antimist Combined.

CLEANING & MAINTENANCE

The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature

CONFORMITY

Conforms to EN166:2001 1FT

Clear Lens meets the optional requirements of EN170

Smoke Lens meets the optional requirements of EN172

EC Certificate Number 0726, issued by Inspec Certification Limited

STEALTH™ COVERLITE



SMOKE LENS:
Polycarbonate

SIDE ARMS & FRAME:
Polycarbonate



TEMPLE:
Polycarbonate

CLEAR LENS:
Polycarbonate



STEALTH™ COVERLITE

TECHNICAL SPECIFICATION


PRODUCT CODE: ASA940-0__ - 00

EYE & FACE PROTECTION

LIGHTWEIGHT SAFETY SPECTACLE FOR USE WITH PRESCRIPTION EYEWEAR


DIMENSIONS OF INNER PACKAGING

Quantity: 10
Stealth™ Coverlite Class K Weight: 550g (Approx.)
Stealth™ Coverlite Class KN Weight: 570g (Approx.)

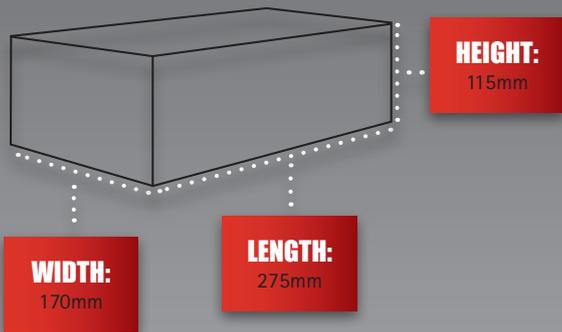

DIMENSIONS OF OUTER PACKAGING

Quantity: 120
Weight: 7.6kg (Approx.)

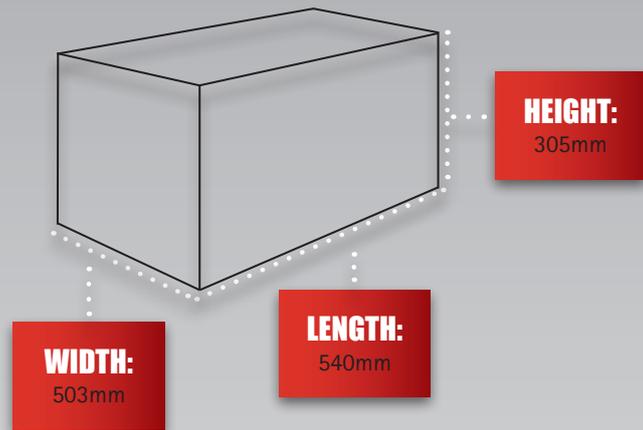

MARKINGS

Frame: EN166 FT		
Clear Lens:	2C-1.2	1.FT.K
Clear PremierShield:	2C-1.2	1.FT.K.N
Smoke Lens:	5-2.5	1.FT.K

DIMENSIONS OF SPECTACLE

Lens Thickness: 1.6mm
Lens Base: 2.5mm curve
Lens Size (Vertical): 56mm
Lens Size (Diagonal): 148.5mm
Bridge: 25.7mm
Temple Length (Lens to tip): 165mm
Overall Width: 137mm
Closest point between temple tips: 27mm
Stealth™ Coverlite Class K Weight: 34g (Approx.)
Stealth™ Coverlite Class KN Weight: 35g (Approx.)



HARDIA™ LENS COATING

A Permanent coating that offers extreme scratch protection to polycarbonate eyewear. The coating meets the requirements of EN166 testing



PREMIER SHIELD™ LENS COATING

A permanent coating from JSP that has passed EN166 testing for K (Anti-Scratch) and N (Anti-Mist)

LIMITATIONS OF USE

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

The Stealth Coverlite™ is not suitable for protection against dusts, liquids or molten metals



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 05/01/18, V1