

Technical data sheet

U clamp, single, plastic pressure trough

Art.-Nr. 1175289



Suitable for all C profile rails with slot width 18 mm and 22 mm.
Polypropylene pressure sleeve, halogen-free, colour light grey RAL 7035.



St	Steel
FT	Hot-dip galvanised

Master data

Item no.	1175289
Type	2056U 28 FT
Description 1	Clamp clip
Dimension	22-28mm
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit	100,00 Piece
Weight	4,34 kg/100 pc.


Technical data sheet

U clamp, single, plastic pressure trough

Art.-Nr. 1175289



Technical data

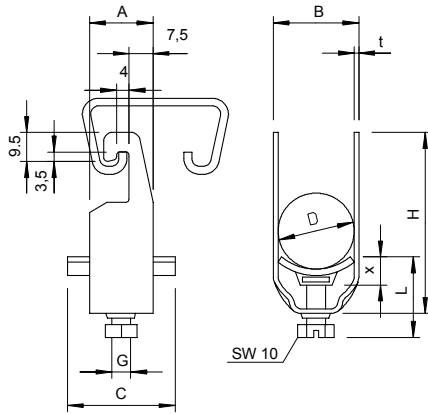

Dimension A	20,00 mm
Dimension B	33,00 mm
Dimension C	34 mm
Dimension G	M6
Dimension H	59,00 mm
Dimension L	34,00 mm
Dimension t	2,00 mm
Dimension x	5,00 mm
Number of cables/pipes	1,00
Max. tightening torque	3,00 Nm
for 1 cable H	59,00 mm
for 1 cable L	34,00 mm
for 2 cable H	89,00 mm
for 2 cable L	47,00 mm
for 3 cable H	119,00 mm
for 3 cable L	47,00 mm
for pipe diameter	25 mm
for rail with slot width	18,00 - 22,00 mm
Halogen-free	☒
With plastic trough	☒
With metal trough	☐
Mounting type	Profile rail
Impact-resistant	☐
Clamping range D	22,00 - 28,00 mm
Surface addition	hot galvanised
Material addition	Steel