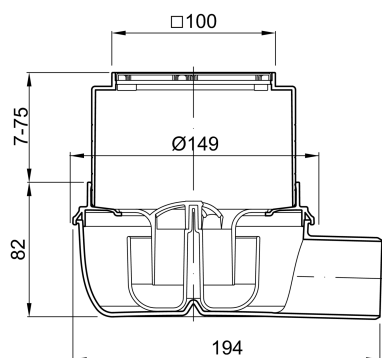


Flatline complete gullies, socket inclination: 1.5°

Product information for the product group



ACO Product benefits




- Retrofit clamping flange
- Optimum cleaning option
- Adjustable height thin bed seal

- Gully bodies DN 50
- Made of plastic (Polypropylen)
- With bracket/connecting rim
- With removable foul air trap
- Water trap depth: 30 mm
- With integrated seal to seal the flow gap between gully body and top section
- With plastic top section
- Frame dimensions: 100 x 100 mm
- Slot grating made from stainless steel
- Load class: K 3
- Slot width: 8 mm
- With protective cover added during installation

Item Technical Data 2505.05.77

Nominal width	Version	Side inlet	Recess [mm]	Flow rate [l/s]	Height-adjustability [mm]	Weight [kg]
DN 50	Flatline	Without lateral inlet	200 x 260	0.8	7 – 75	0.7

Accessories

	Description	Weight [kg]	PU [piece]	Item number
	Thin-bed flange <ul style="list-style-type: none"> ■ Flange made of plastic with sprayed on non-woven material ■ Suitable for holding liquid seals applied on site using the thin bed method 	0.2	4	679945
	Extension <ul style="list-style-type: none"> ■ Made of plastic ■ Suitable for taking plastic top sections and clamping flanges ■ With lip seal ■ For deeper installation of floor gullies 	0.3		2040.00.00
	Thin-bed flange <ul style="list-style-type: none"> ■ Plastic flange with sprayed-on fleece ■ Suitable for taking liquid sealants added on-site using thin bed process 	0.2		2040.00.01

You can find further accessories under → <https://www.buildingdrainage.aco/suche/?q=2505.05.77>



Note: Top sections with slot widths ≤ 8 mm are suitable for barefoot areas.

For more information please visit: <https://www.buildingdrainage.aco/products>

Excluding errors and changes.

Infobox

Item number: 2505.05.77
Version: 19.06.2020
Page 1 of 1