


# SLC ULTRA-R210-220 1660TED 830 WH/OP



Light technic	
Product ID	SLC1044
Beam angle	Open beam/diffuse °
Lamp efficacy	83 lm/W
Reflector	None
Colour rendering index CRI	80-89
Lamp type	LED not exchangeable
Light outlet	Direct
Light sharing	Symmetric
With light source	Yes
Colour temperature	3000 - 3000 K
Rated luminous flux according to IEC 62722-2-1	1660 lm
Colour of light	White
Luminous flux	1660 - 1660 lm
Rated life time L80/B10 at 25 °C	50000 Hours
Colour consistency (McAdam ellipse)	SDCM3
Light distributor	Diffuser lens/optic/panel
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Technical data	
Protection class	II
Colour housing	White
Surface protection	Powder coating
Suitable for lamp power	20 - 20
Type of control gear	LED operating device current-controlled
Material housing	Plastic
Material cover	Plastic, opal
Degree of protection (IP)	IP40
Control gear included	Yes
Max. system power	20 W
Adjustability	Not adjustable
Rated ambient temperature according to IEC62722-2-1	-20 - 45 °C
Dimming phase cut-off	Yes
Power factor	0.9

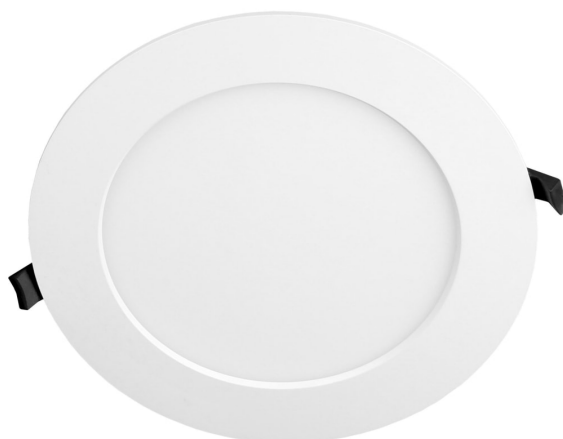

Dimming method	Trailing edge
Input	
Voltage type	AC/DC
Nominal voltage	220 - 240 V
Output	
LED nominal current at constant current	240 - 240 mA
Installation	
Height/depth	33 mm
Built-in width	200 mm
Built-in height/depth	32 mm
Length	230 mm
Built-in length	200 mm
Width	230 mm
Outer diameter	230 mm
Conductor cross section	0.35 mm <sup>2</sup>
Connection type	Plug clamp
Built-in diameter	200 mm
Suitable for suspended mounting	No
Number of poles	3
Suitable for wall mounting	No
Suitable for built-in mounting	Yes
Connectable conductor cross section	0.75 - 1.5 mm <sup>2</sup>
Type of wiring	Suitable for through wiring
Suitable for ceiling mounting	Yes
logistics data	
Imported by	The Light Group
Brand	SLC
General data	
GTIN	7070938055413