

ALUX ROLLER GRILLE

SAFE 3000, Type 120

The Safe 3000 is a simple, punched roller grille for when you want a good design that still allows people to look through.

The grille is specially designed for curved window recesses as its curved punched holes complement them perfectly.

The grille is used in particular for security solutions in shops with a medium level of security as it is an attractive and economic solution.



SAFE 3000 ROLLER GRILLE, Type 120

TECHNICAL SPECIFICATIONS

Certification:

Skafor, Green Class

CE labelled

Grille dimensions:

Width, max: 7500 mm

Height, max: 4500 mm

Grille mesh:

Extruded aluminium profiles with punched holes

Mesh size 120 x 65 mm

Guiding rail:

Extruded aluminium profiles with PVC noisere-
duction inserts as well as teflon wearing pieces
at the top.

Dimensions:

F 90 width: 90 x 41 mm and

F 70 width: 70 x 41 mm

Surface treatment:

Aluminium parts with natural anodised surface
are standard.

They are also available powder-coated in all stan-
dard RAL-colours and in other anodised colours.

Roller tubes, brackets, etc.:

Steel with powder-coated surface (galvanised for
outdoor installation).

Operation:

Built-in 230V tubular motor

or 3 230/380V 3 phase industrial motor

Control:

Key-operated switch or code keypad.

The grille can also be connected to an alarm
system with a special control box.

Locking:

The grille locks in rolled-down position.

EXTRA ACCESSORIES:

Motor with manual override

Covering box for roller tube

Removable guiding rail

Reinforced bottom profile, standard on wide grille

Manual locking


Unroll safety brake

Control unit with safety edge.

UPS – emergency power supply

DIMENSIONS FORM

Grille height	Roller diameter
mm	mm
1500	240
2000	250
2500	280
3000	290
3500	300
4000	310
4500	320

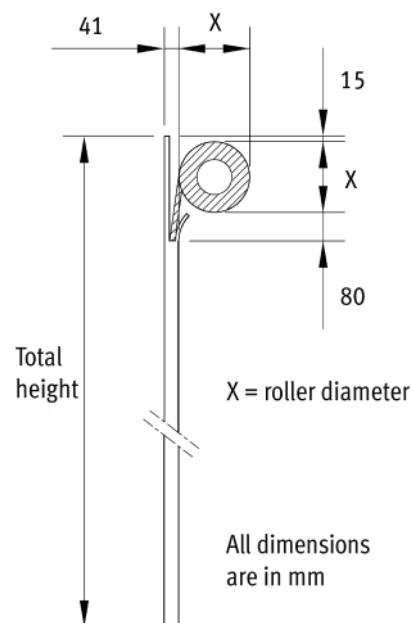

Holmbladsvej 4-6
Dk-8600 Silkeborg

Tel +45 70 26 21 40
Fax +45 70 26 29 94
www.alux.dk