



Allround 360° Alu. 2700K R83 671LM CRI>95 IP44

11.03.2021

3234445



Product description

SLC Allround 360° looks just as good no matter how you adjust it. Tilts 30° in all directions (360°). Can be mounted directly in the insulation, all the way up to the moisture barrier.

SLC Allround 360° looks just as good no matter how you adjust it. Tilts 30° in all directions (360°). Can be mounted directly in the insulation, all the way up to the moisture barrier. No box installation box required. Also available as Dim-to-Warm version (1800K to 3000K).



Tecnical data


Suitable for built-in mounting	Yes
Suitable for suspended mounting	No
Adjustability	Rotating and swivelling
With light source	Yes
Surface protection	Powder coating
Material cover	Glass transparent
Nominal voltage	200 - 240 V
Type of control gear	Electronic transformer
Dimming depending on control gear	Yes
Reflector	High-gloss
Light sharing	Symmetric


Suitable for wall mounting	No
Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Material housing	Aluminium
Colour housing	Aluminium
Voltage type	AC/DC
LED nominal current at constant current	230 - 230 mA
Control gear included	Yes
Dimming phase cut-off	Yes
Light distributor	Reflector
Beam angle	Medium beam 21-40°



Light outlet	Direct
Degree of protection (IP)	IP44
Max. system power	10 W
Colour temperature	2700 - 2700 K
Luminous flux	671 - 671 lm
Lamp efficacy	67 lm/W
Width	96 mm
Length	96 mm
Built-in width	83 mm
Built-in diameter	83 mm
Number of poles	2
Connection type	Plug clamp
Colour consistency (McAdam ellipse)	SDCM3
Beam angle (°)	36
Rotate (°)	360
Can be installed directly into the insulation	True
Brand	SLC
HS Code	94051040


Rated life time L80/B10 at 25 °C	50000 h
Protection class	II
Colour of light	White
Colour rendering index CRI	90-100
Rated luminous flux according to IEC 62722-	671 lm
Power factor	0,95
Height/depth	86 mm
Outer diameter	96 mm
Built-in height/depth	40 mm
Type of wiring	Suitable for through wiring
Conductor cross section	1,5 mm²
Luminaire with limited surface temperature,	Yes
Colour rendering index (CRI/Ra)	95
Tilt-able (°)	30
Operating temperature	-20°C ~ +45°C
Dimming method	Trailing edge
GTIN	7070938053754

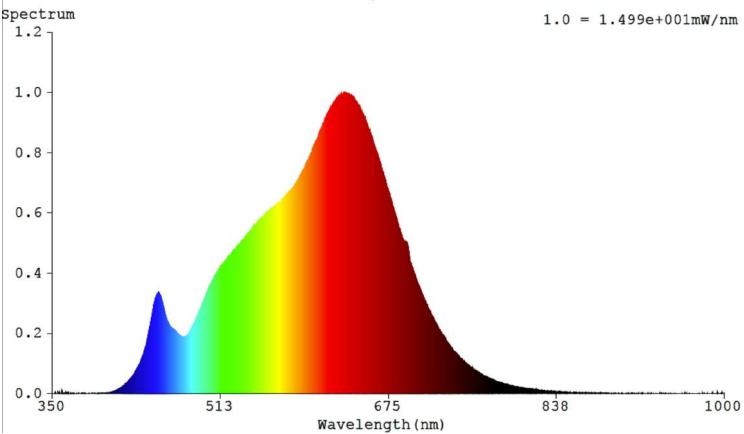



180.0 — 0.0
270.0 — 90.0

Flux 574 lm
Maximum 1896.41 cd/klm
Position C=270.00 G=0.00
Efficiency: 100.00%
Date: 10-08-2021
Asymmetrical

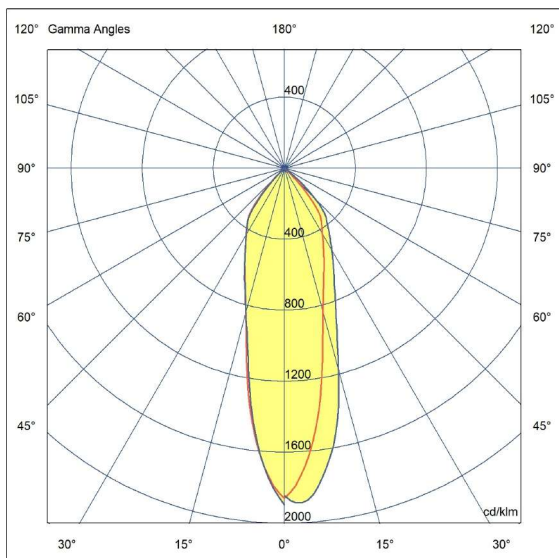

Scandinavian Lighting Concept

3234445



10
kWh/1000h



2019/2015