

SLC BLOCKY R62 WH 500TED 927 IP54 24°

17/11/2021

3234518



Product description

Blocky has a pulled-down edge of 60 mm for glare reduction and character. The light source is deeply recessed and is not visible from the side angles. This gives the impression that there is a cube with a light inside, not a downlight.

Blocky has a pulled-down edge of 60 mm for glare reduction and character. The light source is deeply recessed and is not visible from the side angles. This gives the impression that there is a cube with a light inside, not a downlight. Blocky will give character to the room it stands in and with its simple and clean expression, it fits into most environments. Blocky also cast a square beam that looks great on walls.



Technical data


| | |
|----------------------------------|---|
| Suitable for built-in mounting | Yes |
| Suitable for suspended mounting | No |
| Adjustability | Not adjustable |
| With light source | Yes |
| Surface protection | Powder coating |
| Material cover | Plastic, transparent |
| Nominal voltage | 220 - 240 V |
| Type of control gear | LED operating device current-controlled |
| Dimming phase cut-off | Yes |
| Light distributor | Reflector |
| Beam angle | Medium beam 21-40° |
| Rated life time L70/B50 at 25 °C | 50000 h |

| | |
|---|----------------------|
| Suitable for wall mounting | No |
| Suitable for ceiling mounting | Yes |
| Lamp type | LED not exchangeable |
| Material housing | Aluminium |
| Colour housing | White |
| Voltage type | AC/DC |
| LED nominal current at constant current | 230 - 230 mA |
| Control gear included | Yes |
| Reflector | High-gloss |
| Light sharing | Symmetric |
| Light outlet | Direct |
| Rated life time L90/B10 at 25 °C | 50000 h |




| | |
|--|-----------------------------|
| Degree of protection (IP) | IP54 |
| Rated ambient temperature according to IEC | -10 - 45 °C |
| Max. system power | 9 W |
| Colour temperature | 2700 - 2700 K |
| Luminous flux | 500 - 500 lm |
| Lamp efficacy | 56 lm/W |
| Width | 70 mm |
| Length | 70 mm |
| Built-in width | 62 mm |
| Built-in length | 62 mm |
| Type of wiring | Suitable for through wiring |
| Conductor cross section | 0,35 mm² |
| Connection type | Plug clamp |
| Fit for workplace according to EN 12464-1 | No |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Brand | SLC |
| Produced by | The Light Group |

| | |
|--|----------------|
| Protection class | II |
| Suitable for lamp power | 9 - 9 W |
| Colour of light | White |
| Colour rendering index CRI | 90-100 |
| Rated luminous flux according to IEC 62722- | 500 lm |
| Power factor | 0,95 |
| Height/depth | 103 mm |
| Outer diameter | 70 mm |
| Built-in height/depth | 43 mm |
| Built-in diameter | 62 mm |
| Number of poles | 3 |
| Connectable conductor cross section | 0,75 - 2,5 mm² |
| Luminaire efficacy | 56 lm/W |
| Covering of the luminaire with thermally ins | No |
| Dimming method | Trailing edge |
| GTIN | 7070938054508 |
| HS Code | 94051040 |

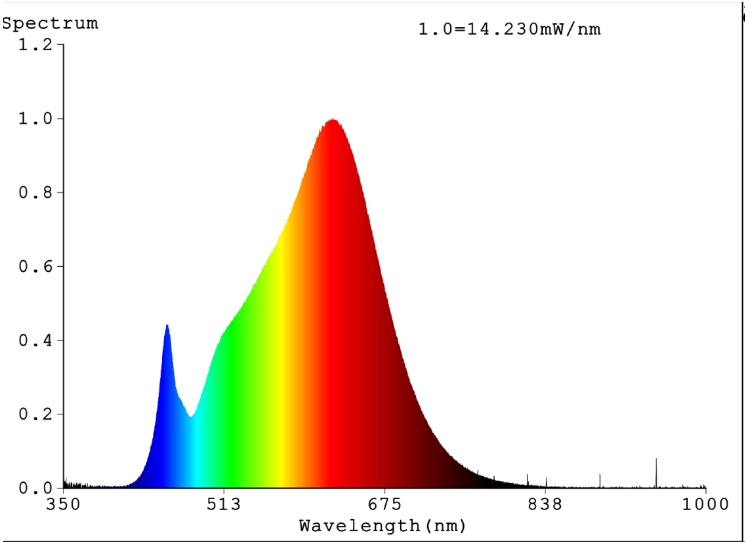

210mm x 160mm



C Halfplanes

180.0 0.0

270.0 90.0

Flux 553 lm


Maximum 3598.45 cd/klm

Position C=90.00 G=0.00

Efficiency: 114.79%


Date: 29-07-2021

Sym. on planes 0-180

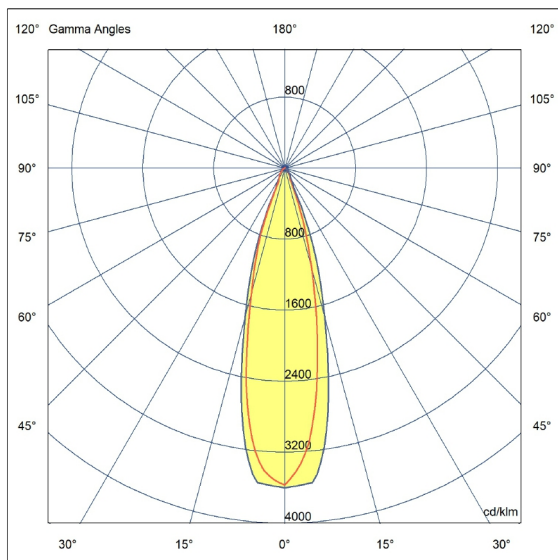

Scandinavian Lighting Concept

3234518

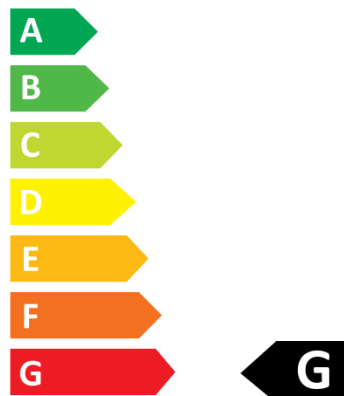

11
kWh/1000h



2019/2015