



## SLC BLOCKY R62 BL 350TED 927 IP54 24°

17/11/2021

3234521



## Product description

Blocky has a pulled-down edge of 60 mm for glare reduction and character. The light source is deeply recessed and is not visible from the side angles. This gives the impression that there is a cube with a light inside, not a downlight.

Blocky has a pulled-down edge of 60 mm for glare reduction and character. The light source is deeply recessed and is not visible from the side angles. This gives the impression that there is a cube with a light inside, not a downlight. Blocky will give character to the room it stands in and with its simple and clean expression, it fits into most environments. Blocky also cast a square beam that looks great on walls.



## Technical data



Suitable for built-in mounting	Yes
Suitable for suspended mounting	No
Adjustability	Not adjustable
With light source	Yes
Surface protection	Powder coating
Material cover	Plastic, transparent
Nominal voltage	220 - 240 V
Type of control gear	LED operating device current-controlled
Dimming phase cut-off	Yes
Light distributor	Reflector
Beam angle	Medium beam 21-40°
Rated life time L70/B50 at 25 °C	50000 h

Suitable for wall mounting	No
Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Material housing	Aluminium
Colour housing	Black
Voltage type	AC/DC
LED nominal current at constant current	230 - 230 mA
Control gear included	Yes
Reflector	High-gloss
Light sharing	Symmetric
Light outlet	Direct
Rated life time L90/B10 at 25 °C	50000 h




Degree of protection (IP)	IP54
Rated ambient temperature according to IEC	-10 - 45 °C
Max. system power	9 W
Colour temperature	2700 - 2700 K
Luminous flux	350 - 350 lm
Lamp efficacy	39 lm/W
Width	70 mm
Length	70 mm
Built-in width	62 mm
Built-in length	62 mm
Type of wiring	Suitable for through wiring
Conductor cross section	0,35 mm²
Connection type	Plug clamp
Fit for workplace according to EN 12464-1	No
Colour consistency (McAdam ellipse)	SDCM3
Brand	SLC
Produced by	The Light Group

Protection class	II
Suitable for lamp power	9 - 9 W
Colour of light	White
Colour rendering index CRI	90-100
Rated luminous flux according to IEC 62722-	350 lm
Power factor	0,95
Height/depth	103 mm
Outer diameter	70 mm
Built-in height/depth	43 mm
Built-in diameter	62 mm
Number of poles	3
Connectable conductor cross section	0,75 - 2,5 mm²
Luminaire efficacy	39 lm/W
Covering of the luminaire with thermally ins	No
Dimming method	Trailing edge
GTIN	7070938054539
HS Code	94051040

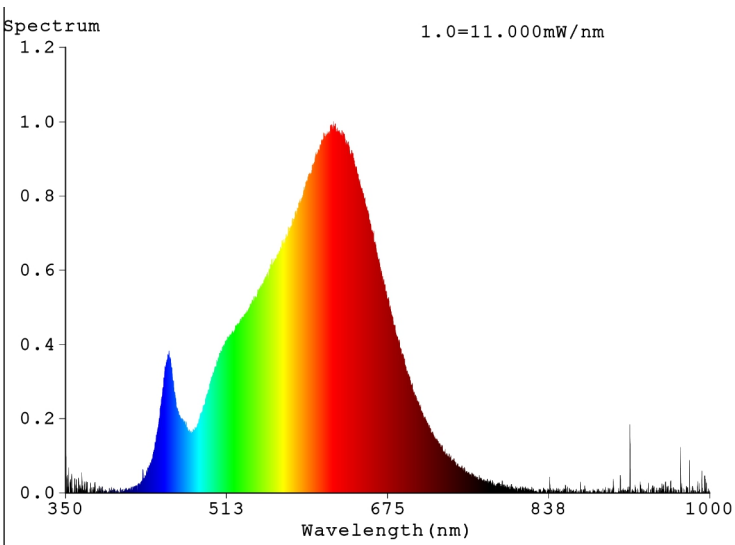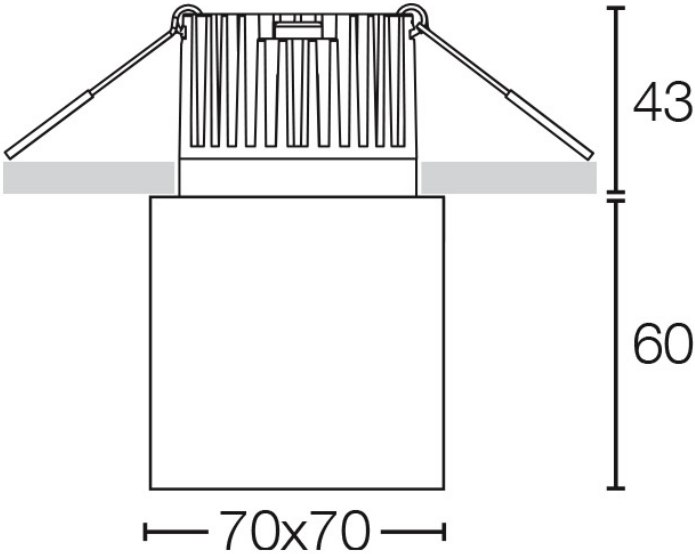

210mm x 160mm




C Halfplanes

180.0 0.0


270.0 90.0

Flux 417 lm  
Maximum 4539.25 cd/klm  
Position C=67.50 G=0.00  
Efficiency: 115.09%  
Date: 29-07-2021  
Sym. on planes 0-180

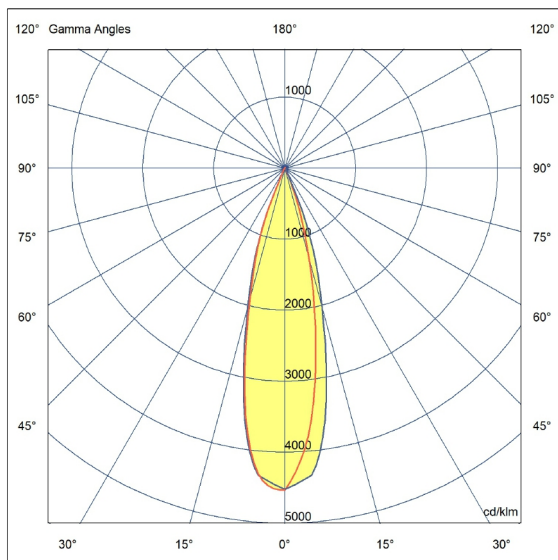

Scandinavian Lighting Concept

3234521

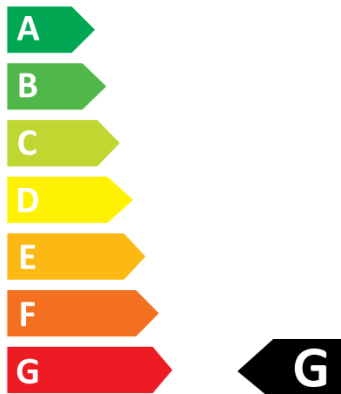

**11**  
kWh/1000h



2019/2015