


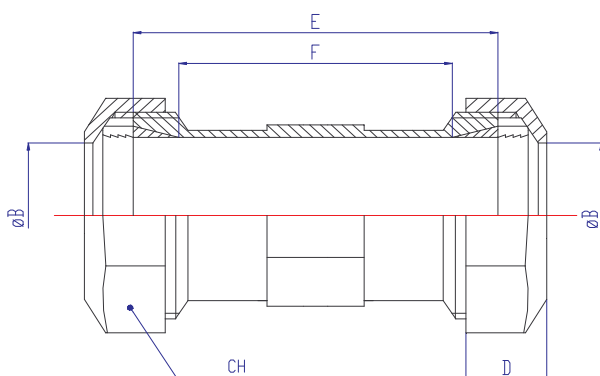

MATERIALS

BODY: Brass CW617N-UNIEN12165

NUT: Brass CW617N-UNIEN12165

FASTENER RING + CONICAL SEAL: polyamide + NBR

**ONE
COMPONENT
ONLY!!**

ART. 4305

Coupling fitting for PE pipe

QUICK CONNECTION

Misura	B	D	E	F	CH
20	21	17	50	32	34
25	26	19	67	42	41
32	33	22	74	46	51
40	42	24	78	51	59
50	52	25,6	80	52	70
63	65	29,5	98	62	87

TECHNICAL DATA:

Max Working pressure: **25 bar**


Working temperature: **-15° +110 °C**

Threads: **UNI ISO 228/1**

For high and low density PE pipes

Tests conforming to:

UNI EN 1254-3:2000 (UNI EN 712, 713, 715)

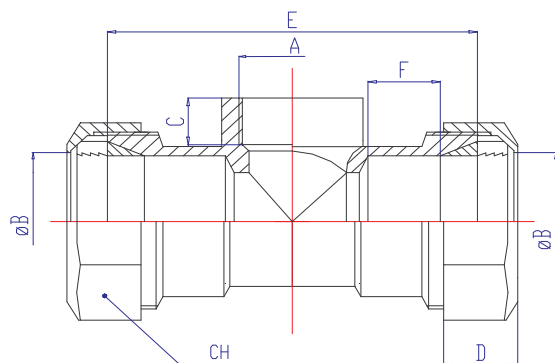

MATERIALS

BODY: Brass CW617N-UNIEN12165

NUT: Brass CW617N-UNIEN12165

FASTENER RING + CONICAL SEAL: polyamide + NBR

**ONE
COMPONENT
ONLY!!**

ART. 4306

T female fitting for PE pipe

QUICK CONNECTION

Misura	A	B	C	D	E	F	CH
20	1/2"	21	11	17	62	11	34
25	3/4"	26	12	19	72	11	41
32	1"	33	14	22	80	11	51
40	1,1/4"	42	15	24	102	15	59
50	1,1/2"	52	21	25,6	118	19	70
63	2"	65	22	29,5	140	21	87

TECHNICAL DATA:

Max Working pressure: **25 bar**

Working temperature: **-15° +110 °C**

Threads: **UNI ISO 228/1**

For high and low density PE pipes

Tests conforming to:

UNI EN 1254-3:2000 (UNI EN 712, 713, 715)