



SLC LED STRIP S2 MONO CV 126 5M 8MM 9,6W 900LM 927 IP2

12/04/2022

S11060**CV****2700K****24VDC**

Product description

Outstanding light output and low power. Suitable for most installations as direct, indirect, decorative and background lighting.

Our bestseller is now available in an upgraded version with better colour rendering CRI 90+, more lumen output and higher efficiency. Suitable for most installations as both direct and indirect lighting. Create uniform light with 126 LEDs per meter. Must be placed in a profile for cooling and ensure a long lifetime. With double-sided 3M tape, the strip is versatile and easy to mount.



Technical data

Model	Strip
Lamp type	LED not exchangeable
Lamp power per meter	9,6 W
Voltage type	DC
Beam angle	120 °
Rated life time L80/B10 at 25 °C	60000 h
Protection class	II
Colour temperature	2700 - 2700 K
Width	8 mm
Length of particular segments	55,6 mm
Type of wiring	Ending
Conductor cross section	0,35 mm²



Mounting method	Surface mounting/recessed mounting
Number of nodes per meter	126
Luminous flux per meter	900 lm
Lamp voltage	24 - 24 V
Type of control gear	LED operating device voltage-controlled
Degree of protection (IP)	IP20
Colour of light	White
Colour rendering index CRI	90-100
Height/depth	2 mm
Self-adhesive	Yes
Number of poles	2
Connection type	Solder






Colour rendering index (CRI/Ra)	90
Cutting point, every: (mm)	55
3M adhesive tape	Yes
Produced by	The Light Group

Beam angle (°)	120
Max length per connection:	5 meter
Brand	SLC

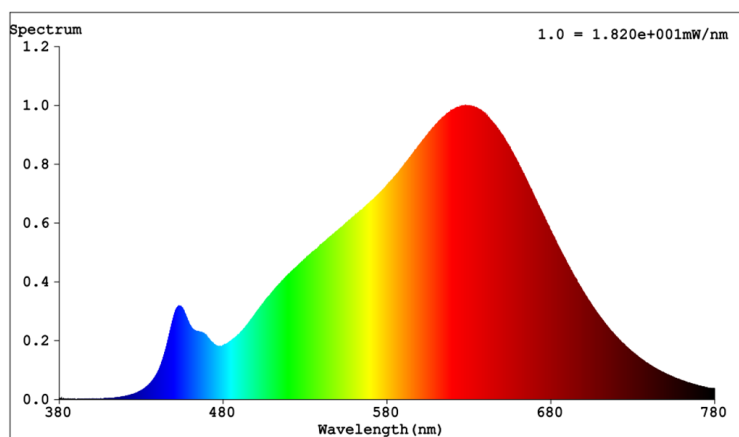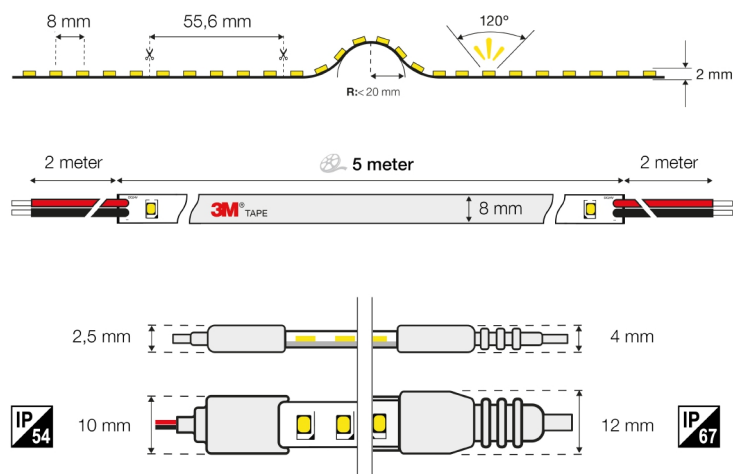



10mm x 1000mm




C Halfplanes

180.0 0.0


270.0 90.0

Flux 923 lm
Maximum 326.99 cd/klm
Position C=202.50 G=1.00
Efficiency: 100.00%
Date: 13-10-2020
Asymmetrical

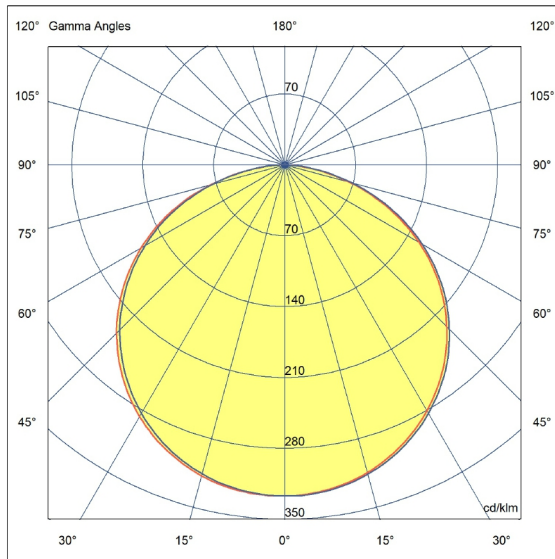

Scandinavian Lighting Concept

S11060

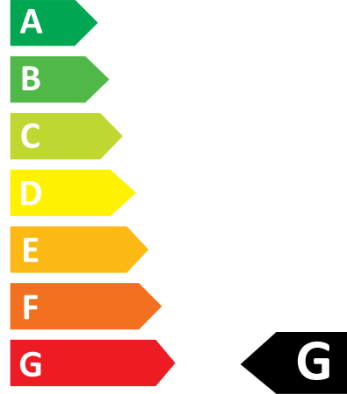

5
kWh/1000h



2019/2015

