




DON

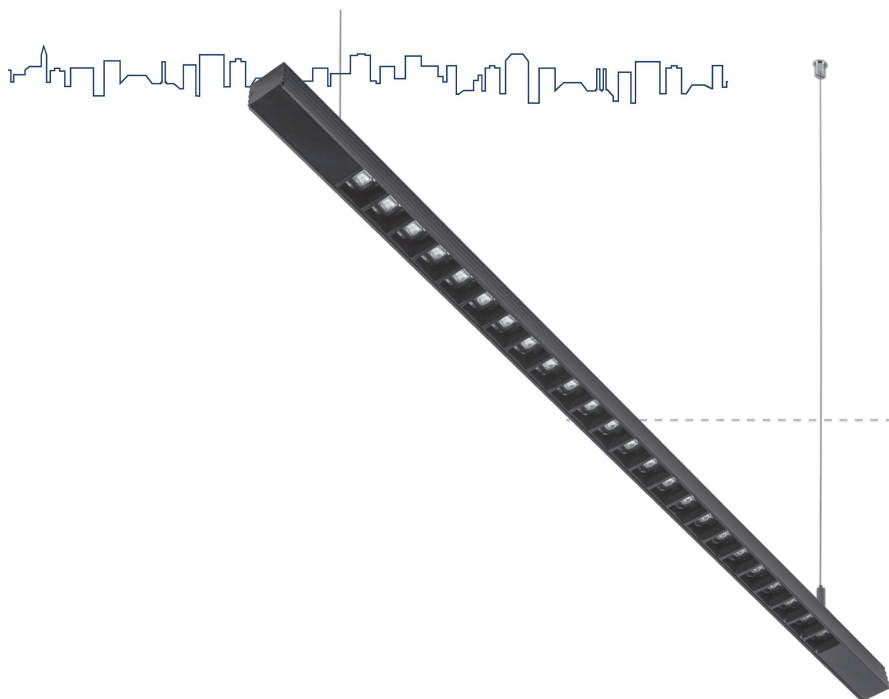

η_{ef} (lm/W)
127-148



DON B80



DON B50

Dark optic linear fittings

Body:

Painted aluminium profile – see page 91 for available colors

Optic:

PC reflector + clear PMMA lenses

B50 - white reflector with lenses 50°

B80 - white reflector with lenses 80°

C50 - black reflector with lenses 50°

C80 - black reflector with lenses 80°

Accessories:

DOPZAVES - suspension set with a power cable

(must be ordered separately – doesn't included in standard DOP packing)

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	●
ON/OFF	1-10V	DALI	Bluetooth	Mesh	Beam	INT	EXT	Beam
●	×	○	○	×	○	×	×	×

● default

○ optional



×

not possible



Codes: DON1500M4CC80/ND

DON	1500	M	4	C	C80	/ND
Luminaire type DON – surface / pendant fitting	Light output	Body length: S = 775mm M = 1358mm L = 1620mm	Color temperature 2 = 2700K 3 = 3000K 4 = 4000K MIX – tunable white	Body color C = black B = white G = grey	Optic C = black B = white 80° 50°	Wiring: ND – no dimmable DALI – dimmable DALI BT – bluetooth control PIR – infrared sensor

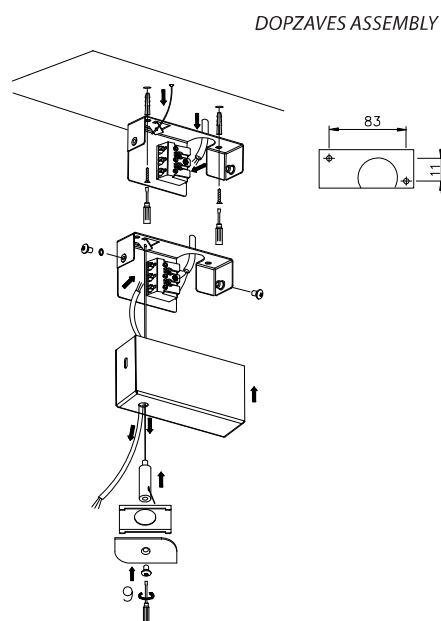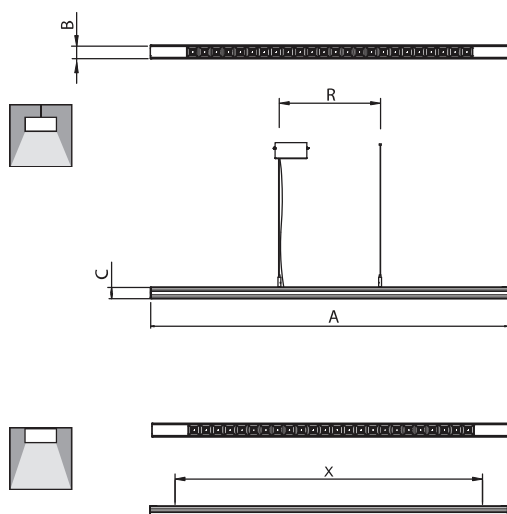

DON	W	Im		A	B	C	X	R	kg
		B50, B80	C50, C80						
DON1500 S	11	1 400	1 250	775	48	57	686	740	1,1
DON3000 S	22	3 000	2 700						
DON1500 M	11	1 600	1 450	1358			1276	865-1110	1,6
DON2500 M	16	2 300	2 100						
DON3500 M	23	3 400	3 050						
DON4000 M	28	4 000	3 600						
DON5000 M	37	5 200	4 700						
DON7000 L	52	7 000	6 300	1620			1538	1065-1390	2,1

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.