

Feed-through terminal block - XTV 10 BU



1329549

<https://www.phoenixcontact.com/gb/products/1329549>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 57 A, connection method: Push-X-connection, Rated cross section: 10 mm², cross section: 1.5 mm² - 16 mm², mounting type: NS 35/7,5, NS 35/15, color: blue

Your advantages

- Fast, powerless conductor connection for all conductor types with the pretensioned contact spring
- A high level of flexibility when inserting conductors enables conductors with or without ferrules to be connected easily
- Clear conductor connection with the lateral connection direction and the clear pusher position
- Easy procurement of information – the QR code on the terminal block provides all important information about the product
- Terminal blocks with Push-X connection are part of the COMPLETE line system

Feed-through terminal block - XTV 10 BU



1329549

<https://www.phoenixcontact.com/gb/products/1329549>

Commercial Data

Item number	1329549
Packing unit	50 pc
Minimum order quantity	50 pc
Sales Key	BE2511
Product Key	BE2511
GTIN	4063151623197
Weight per Piece (including packing)	32 g
Weight per Piece (excluding packing)	32 g
Customs tariff number	85369010
Country of origin	CN

Feed-through terminal block - XTV 10 BU



1329549

<https://www.phoenixcontact.com/gb/products/1329549>

Technical Data

Notes

General

Note	When establishing a connection on the open housing side of a feed-through modular terminal block of the same series and size, the block must be provided with a cover if the expected insulation voltage is >320 V.
------	---

Product properties

Product type	Feed-through terminal block
Number of positions	1
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	2
Number of rows	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Test surge voltage	8 kV
--------------------	------

Connection data

Number of connections per level	2
Stripping length	17 mm ... 19 mm
Internal cylindrical gage	A6
Conductor cross section solid	1.5 mm ² ... 16 mm ²
Cross section AWG	16 ... 6
Conductor cross section flexible	2.5 mm ² ... 10 mm ²
Conductor cross section, flexible [AWG]	14 ... 8
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	1.5 mm ² ... 10 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	1.5 mm ² ... 10 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	1.5 mm ² ... 4 mm ²
Nominal current	57 A
Maximum load current	70 A (with 16 mm ² conductor cross section)
Nominal voltage	1000 V
Nominal cross section	10 mm ²

Dimensions

Width	10.2 mm
-------	---------

Feed-through terminal block - XTV 10 BU



1329549

<https://www.phoenixcontact.com/gb/products/1329549>

End cover width	2.2 mm
Height	48.8 mm
Height NS 35/15	57.8 mm
Height NS 35/7,5	50.3 mm
Length	72 mm

Material specifications

Color	blue
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
------------------	------

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2018-05
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	$6.12 \text{ (m/s}^2\text{)}^2\text{/Hz}$
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2018-05
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Feed-through terminal block - XTV 10 BU



1329549

<https://www.phoenixcontact.com/gb/products/1329549>

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

Feed-through terminal block - XTV 10 BU


1329549

<https://www.phoenixcontact.com/gb/products/1329549>



Drawings

Circuit diagram

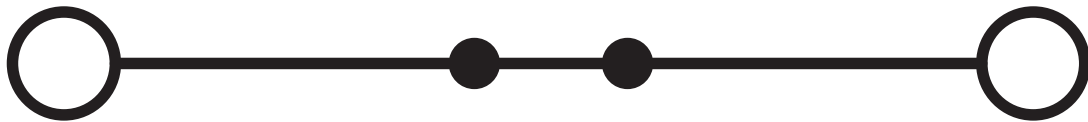


Feed-through terminal block - XTV 10 BU



1329549

<https://www.phoenixcontact.com/gb/products/1329549>

Approvals

 cULus Recognized Approval ID: E60425				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Use group B				
	600 V	55 A	12 - 6	-
Use group C				
	600 V	55 A	12 - 6	-
Use group F				
	1000 V	55 A	12 - 6	-

Feed-through terminal block - XTV 10 BU



1329549

<https://www.phoenixcontact.com/gb/products/1329549>

Classifications

ECLASS

ECLASS-11.0	27141120
-------------	----------

ETIM

ETIM 8.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk