

Start Highbay DALI
START Highbay IP65 DALI 26000lm 840 MB
0039364



Product features

- START Highbay, includes 1 m cables, black aluminium housing, 24,700 Lm, 190 W, 130 Lm/W, 4000 K, drive current: 4100 mA, CRI 80, 60° beam angle, DALI dimmable, IP65, IK08, 54,000 hrs (L80/B50), (D x H) 339 x 189 mm, 1 m mains cable, 1 m control cable, 1.2 m chain length including hooks



NOTES

undefined


PRODUCT OVERVIEW

Product name	START Highbay IP65 DALI 26000lm 840 MB
Technology	LED
Housing	Aluminium
Mount	Suspended
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4309001
E-number SE	7214424
Warranty	5 years
Fixture luminous flux (lm)	24700
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	60
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	190
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288393643
Dimming method	DALI

Start Highbay DALI

START Highbay IP65 DALI 26000lm 840 MB
0039364

PHOTOMETRY

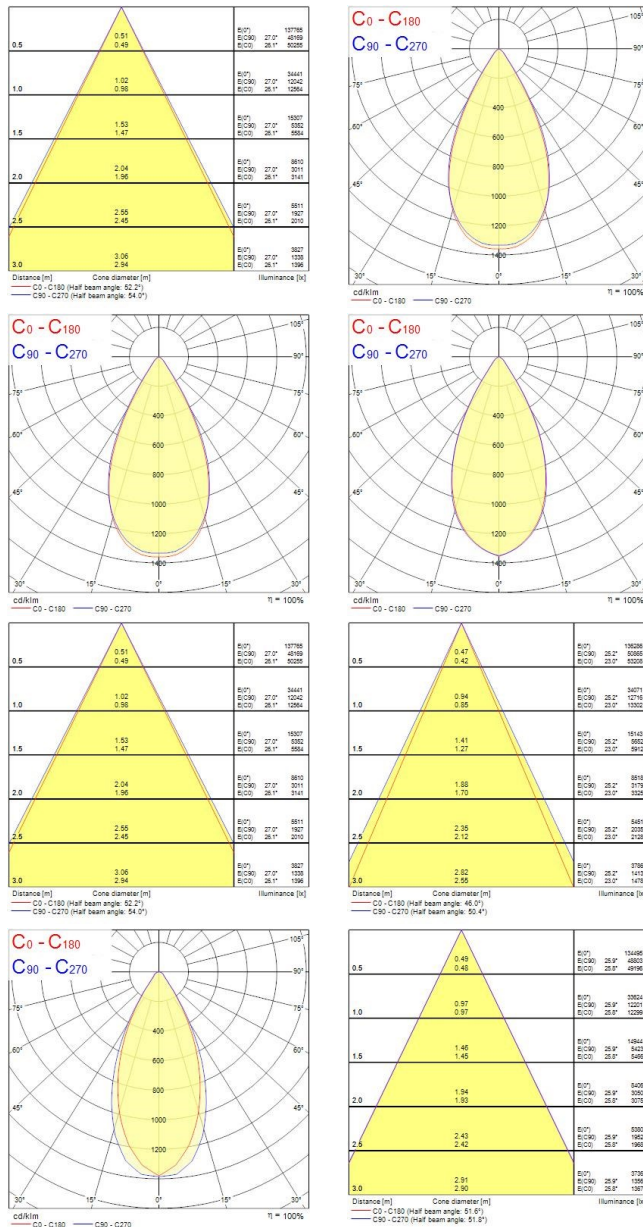

TECHNICAL DRAWINGS

Start Highbay DALI

START Highbay IP65 DALI 26000lm 840 MB

0039364

