




TIP

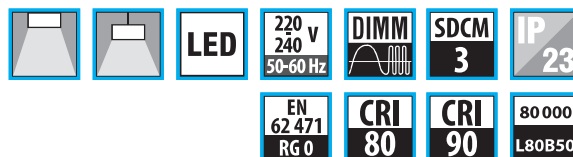

η_{ef} (lm/W)
134-147



TIP CW



TIP CN



TIP 12000 M2

LED linear fittings

Body:

White painted (RAL 9003) metal sheet

Optic:

CW –wide 110°

CN –narrow 60°

Application:

Surface or pendant installation



Can be installed in continuous row – fittings are equipped with three wiring 5x1,5 as standard

Accessories:

ZH/UNI4 – universal 4-wires suspension (one set for 2 luminaires)

OMTIPM – protection grid TIP M

OMTIPL – protection grid TIP L

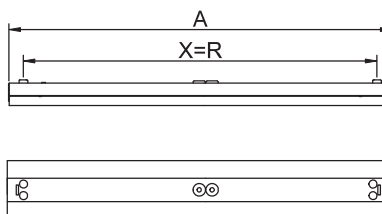

TIP	W	Im		A	B	C	X	kg
		CW	CN					
TIP6000 M1	38	5 600	5 300	1284	145	73	1204	3,8
TIP12000 M2	74	11 000	10 400					4
TIP8000 L1	57	8 200	7 800	1584			1504	4,8
TIP16000 L2	114	16 100	15 300					5

lm - luminaire light output

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	×	×	●
ON OFF	1-10V	DALI	Bluetooth			INT	EXT	
●	×	○	×	×	○	○	×	×


● default

○ optional


×



OPTIC



PROTECTION GRID TIP



LAMP HINGE



EASY INSTALLATION