

EASY BAND

UNIVERSAL SINGLE-SIDED TAPE



D
DIN 4108-11

VERSATILE

Progress adhesion, stable over time, for the most common supports.

INDUSTRIAL USE

Adhesive mix and available versions also designed for prefabrication.

COMPOSITION


support
PE film

glue
acrylic dispersion without solvents

reinforcing layer
polyester reinforcing grid

glue
acrylic dispersion without solvents

release liner
silicone coated paper

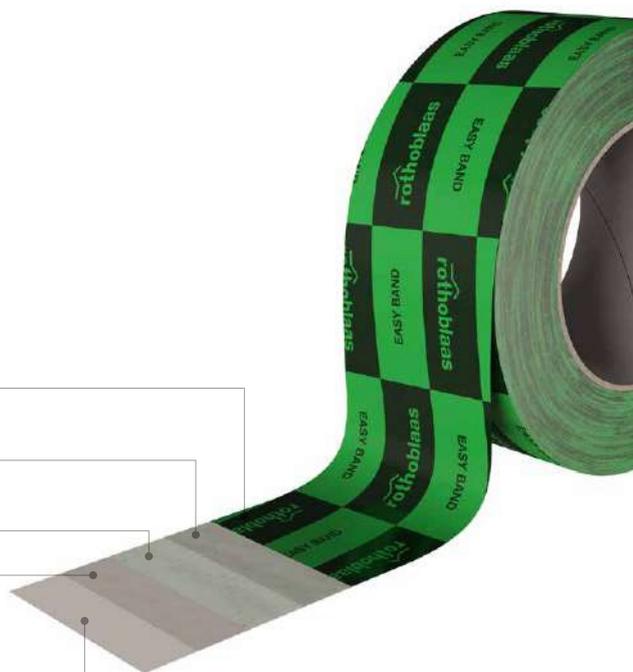

TECHNICAL DATA




Properties	standard	value	USC conversion
Total thickness	-	0,28 mm	11 mil
Adhesiveness	EN 1939	> 35 N/25 mm	8 lbf/in
Water vapour transmission (Sd)	EN ISO 12572	40 m	0.09 US perm
UV resistance	-	4 months	-
Application temperature	-	-10 / +100 °C	+14 / +212 °F
Temperature resistance	-	-40 / +100 °C	-40 / +212 °F
Storage temperature ⁽¹⁾	-	+15 / +25 °C	+59 / +77 °F
Solvents	-	no	-
VOC emissions	EN 16516	55 µg/m ³	-
French VOC classification	ISO 16000	A+	-
Ecode	GEV test procedure	EC1 plus	-

⁽¹⁾Store the product in a dry, covered location.
Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	B [mm]	L [m]	B [in]	L [ft]	
EASY50	50	25	2.0	82	12
EASY60	60	25	2.4	82	10

■ FIELDS OF APPLICATION

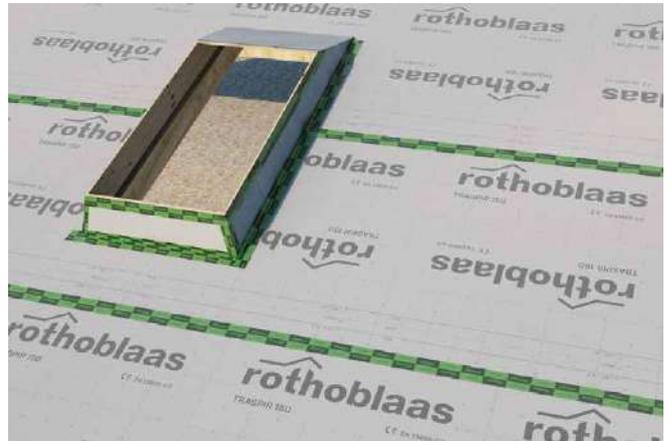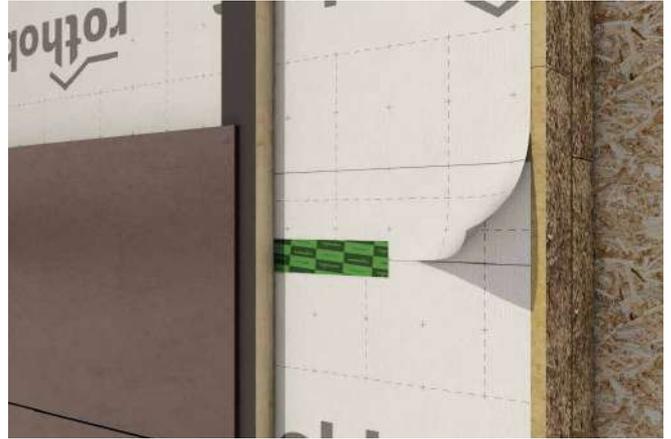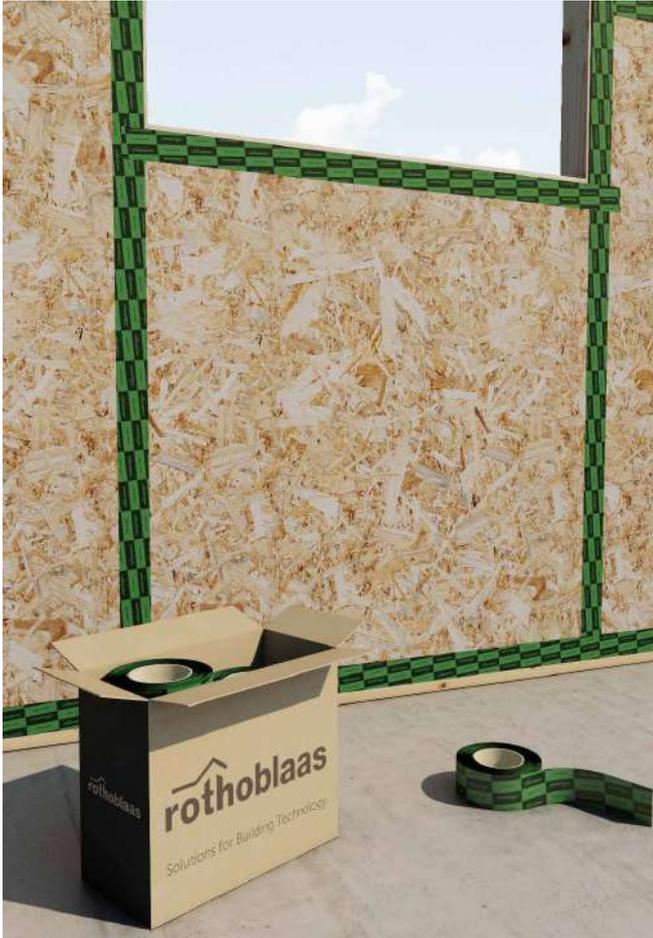

■ RELATED PRODUCTS




PRIMER SPRAY
page 102



PRIMER
page 103



CUTTER
page 328

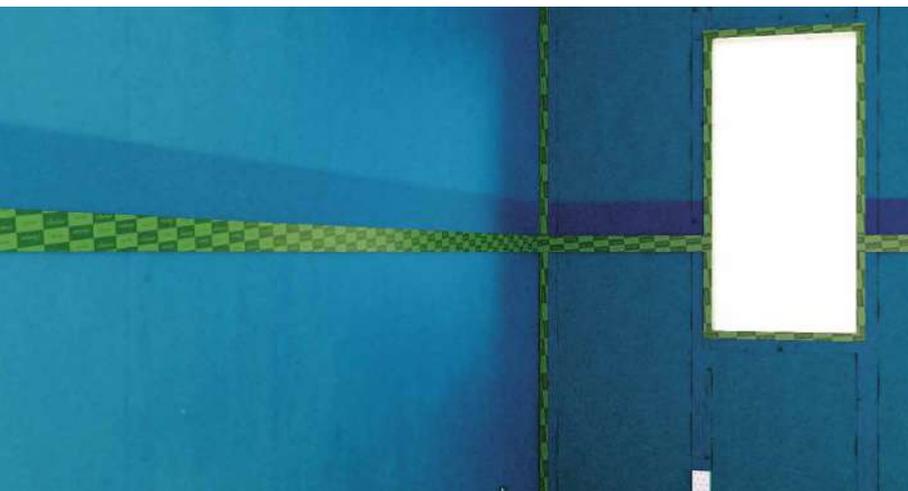

PERFORMANCE COST

The packaging and the mix of glue and carrier made it possible to obtain a very good product at a low cost.

ALSO FOR WARM CLIMATES

The type of glue, its quantity and the choice of carrier make this tape suitable for sealing on smooth surfaces and at high temperatures, preventing the tape from slipping in all those situations where the glue generally tends to soften.