

VPFC20 Valve system DN20

Press. independ. modul. 0.058-0.32 l/s


Item number: 238295

VPFC, pressure independent and modulating valve system.

Two way pressure independent control and adjustment valve with modulating actuator and shut-off valve. 24V. Used with FC control system or supplemented with suitable thermostat.

The valve system VPFC consists of the following:

- TAC, pressure independent regulation and adjustment valve
- AV, shut off valve
- SDM24, modulating actuator 24V

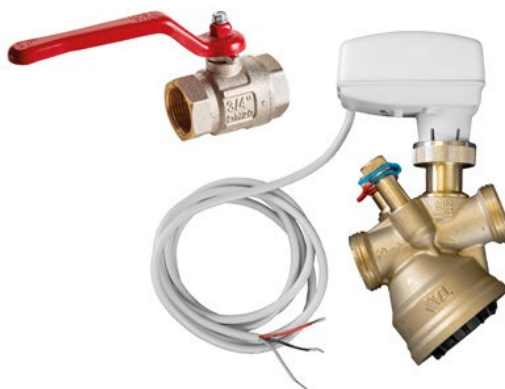

Technical parameters

Dimensions and weights		
Weight	1.16	kg
Motor/control supply		
Control/motor supply	24	V
Water data		
Water flow range	0.058 to 0.32	L/s
Water pressure range	15 to 400	kPa
nominal size	DN20	

Accessories

- ANS2018 Adapter nipple set R20 (333350)
- UNSG2518 Union set G25 x 18mm (333345)
- UNSG25R20 Union set G25 x R20 (333341)
- ANS2022 Adapter nipple set R20 (333351)
- UNSG2522 Union set G25 x 22mm (333346)

Documents

- Catalogue page VPFC
- Manual VPFC