



Date
Customer
Project
Type

Mini-Multiple Recessed Trimless Adjustable M-LED 2x DE Black Matt

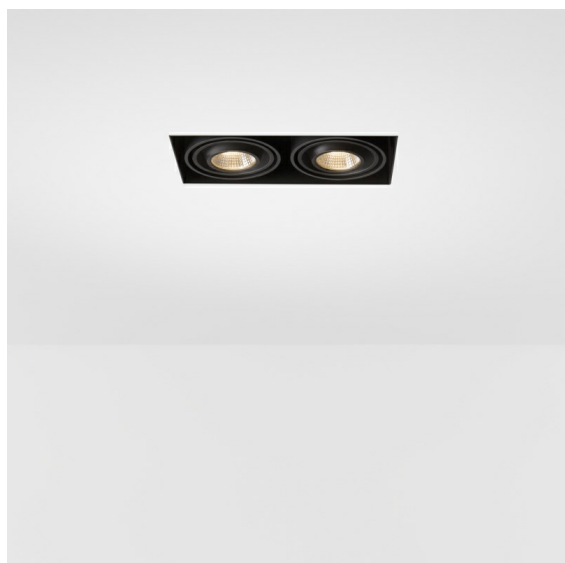


Twenty years after its initial launch, Mini-Multiple is still a much coveted spot series and one of our flagship solutions in our architectural lighting portfolio. Its stylish technology on full display makes Mini-Multiple your ally for both minimalist and industrial-chic expressions.



Specifications

Material	13131102	
Light Source Type	for M-LED	
Lifetime	L80B20 @50,000 Hours	
Lamp Included	No	
Number of Light Sources	2	
Light Direction	Down	
Optic	Reflector	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling, Wall	
Mounting	Recessed	
Cut-out size (mm)	L 203 W 103	
Mounting depth (mm)	120.0	
Adjustability	V -35°/+35°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Black, Matt	
Gross weight (g)	906.0	
Drive current (mA)	350	500
Delivered lumens (lm)	571	734
Efficacy (lm/W)	92	80
Glare rating	13	14
Remark	• M-LED light module not included • This is not a complete product. M-LED light module required. • This is not a complete product. Light module required.	


M-LED Module



- **14070002** M-LED 70 2700K spot DE black matt
- **14070009** M-LED 70 2700K spot DE white struc
- **14070102** M-LED 70 2700K medium DE black matt
- **14070109** M-LED 70 2700K medium DE white struc
- **14070202** M-LED 70 2700K flood DE black matt
- **14070209** M-LED 70 2700K flood DE white struc
- **14070302** M-LED 70 3000K spot DE black matt
- **14070309** M-LED 70 3000K spot DE white struc
- **14070409** M-LED 70 3000K medium DE white struc
- **14070402** M-LED 70 3000K medium DE black matt
- **14070509** M-LED 70 3000K flood DE white struc
- **14070502** M-LED 70 3000K flood DE black matt
- **14070609** M-LED 70 4000K spot DE white struc
- **14070602** M-LED 70 4000K spot DE black matt
- **14070709** M-LED 70 4000K medium DE white struc
- **14070702** M-LED 70 4000K medium DE black matt
- **14070802** M-LED 70 4000K flood DE black matt
- **14070809** M-LED 70 4000K flood DE white struc
- **14070902** M-LED 70 1800-3000K warm dim spot DE black
- **14070909** M-LED 70 1800-3000K warm dim spot DE white
- **14071002** M-LED 70 1800-3000K warm dim medium DE black
- **14071009** M-LED 70 1800-3000K warm dim medium DE white
- **14071102** M-LED 70 1800-3000K warm dim flood DE black
- **14071109** M-LED 70 1800-3000K warm dim flood DE white

Installation Accessories

10440230 Conbox 237x158x130



■ **10460230** Recessed frame Mini multiple trimless 2x

■ Choose a required accessory