



Plat Recessed

Nahtrang Design

Pendant Plat Recessed LED 13W Switch 2700K/3000K/4000K Fume 763lm PHASE-CUT

Technical features

Luminaire total power: 13W
Real lumens: 762 (3000K)
Real lm/W: 59
Correlated Colour Temperature (CCT): SW 2700-3000-4000K
Lens / reflector angle: FLOOD 89°
UGR: <=16
Structure material: Steel
Structure finish: Black
Diffuser material: Glass
Diffuser finish: Fumé
Driver Brand: HEP
Voltage / frequency: 220-240V/50-60Hz
Dimming protocol: PHASE CUT
Power Factor: 0.90
Useful life: 50,000h L80B20
Warranty: 5 años
Easily recyclable luminaire



Luminotechnic features

CRI: 90
MacAdam steps: 3
Photobiological risk: RGO

UGR	
S=0.250	
Ceiling / cavity	0.7
Walls	0.5
Working Plane	0.2
Room dimensions	X=4H, Y=8H
UGR crosswise	14.9
UGR lengthwise	14.9

Lampholder	Quantity	Light source power (W)
LED	1	10.5W

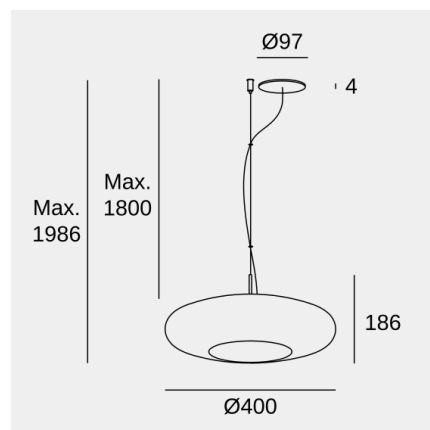


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Plat Recessed

Nahtrang Design

Pendant Plat Recessed LED 13W Switch 2700K/3000K/4000K Fume 763lm PHASE-CUT

Logistics



x 1

Net weight (kg): 2.52

Packaged weight (kg): 6.36

Packaging: 480mm x 480mm x
405mm

Light application



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.