



Formula 65 LED

F65LED 24W IP65 CT SA LF

IP65 waterproof emergency luminaire, with adjustable autonomy and possibility of additional battery.



Control system CT

Order code 19294

EAN 8002219730411

Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	4 W
Control system	CT
Autonomy	1h, 1.5h, 2h, 3h, 8h
Battery included	Yes
Battery type	LiFe
Battery	LiFe 6.4V 1.5Ah
Charging time	12 h
Autonomy test time	60 min
Autonomy test frequency	182 days
Test frequency	28 days
Ambient temperature (min)	-10 °C
Ambient temperature (max)	45 °C
Insulation class	II
CCT light tone	4000 K
LED number	32
Photobiological risk	RG0
CRI color rendering	>80
Operation mode	NM/M
Equivalent power	24WGL
Flux SA	250 lm
Flux SE	500 lm, 350 lm, 280 lm, 200 lm, 80 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.1
Glow wire strength	850 °C - 30s.
Light sensor	Yes
Movement sensor	Yes
Mounting	Wall, Ceiling, Recessed, Suspension
Number of Batteries	1
Pictogram included	Yes
Rest mode	Yes
Visibility distance	25 m
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

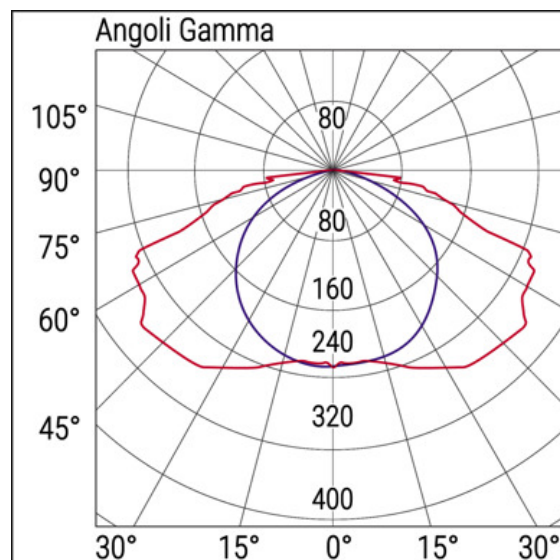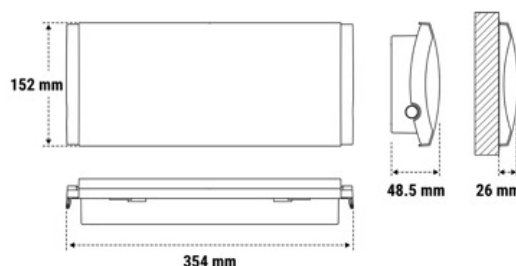

Installation and applications

Environment	Secondary Areas
Application	Offices, Industrial Areas, Public Areas
Mechanical specifications	
Height	49 mm
Length	152 mm
Width	354 mm
Weight	0.5 Kg
Body material	Polycarbonate
Colour housing	White RAL 9003
Cover material	Transparent polycarbonate
Diffuser finiture	Clear
Protection grade IP	IP65
Protection grade IK	IK07

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020

Supplied accessories



19044
ADES 3 SX DX BS F65

Accessories



15036
MODULO LG



15037
MODULO LGFM



19040
INCASSO+CORNICI F65




19043
SCHERMO BANDIERA BASSO F65



19045
STAFFA A PARETE X BANDIERA F65



19042
SCHERMO BANDIERA DX/SX F65



3912
GRIGLIA EM 440X215X99



19041
STAFFA CONTROSOFFITTO F65



15038
MODULO DALI

Spare parts



415467001
LiFe 6.4V 1.5AH 18650PK L140
T