

Complete gullies Easyflow, DN 50

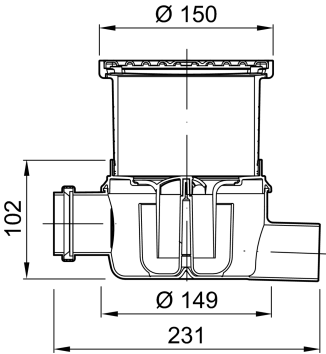
Product information for the product group

ACO Product benefits

- Retrofit clamping flange
- Optimum cleaning option
- Adjustable height thin bed seal
- Retrofit fire protection

Fire protection


Fire resistance class R30 – R120 tested according AbZ: Z-19.17-1887




Item Technical Data 2500.00.77

Nominal width	Version	Side inlet	Recess [mm]	Flow rate [l/s]	Height- adjustability [mm]	Weight [kg]
DN 50	Standard	With lateral inlet	200 x 330	1.0	15 – 96	1.1

Accessories

Description	Used with	Weight	PU	Item number
		[kg]	[piece]	
 Extension ■ Made of plastic ■ Suitable for taking plastic top sections and clamping flanges ■ With lip seal ■ For deeper installation of floor gullies	■ All Easyflow floor drains ■ Top sections □ Socket diameter 125 mm ■ Walk-in with gully sockets	0.3		2040.00.00
 Thin-bed flange ■ Plastic flange with sprayed-on fleece ■ Suitable for taking liquid sealants added on-site using thin bed process	■ All Easyflow top sections □ 2500.77.11 □ 2700.77.11 □ 2700.77.12 ■ Top section with socket diameter 125 mm	0.2		2040.00.01

	Description	Used with	Weight	PU	Item number
			[kg]	[piece]	
	Thin-bed flange ■ Flange made of plastic with sprayed on non-woven material ■ Suitable for holding liquid seals applied on site using the thin bed method	■ All Easyflow top sections □ 2500.77.11. □ 2700.77.11 □ 2700.77.12 ■ Top sections with socket diameter: 125 mm	0.2	4	679945
	Compressed seal flange ■ Plastic flange ■ Loose flange made from stainless steel ■ Suitable for taking sealants foils added on-site for sealing layers for point drainage	■ All Easyflow floor drains	0.6		2040.00.02
	Odour stop ■ Prevents unpleasant odours from the sewage system, irrespective of the water seal height	■ Floor gullies, Easyflow □ Standard □ DN 50	0.1		2000.00.06

You can find further accessories under → <https://www.buildingdrainage.aco/search/?q=2500.00.77>