


Fixed height with vertical outlet - Square top

Product information for the product group

ACO Product benefits

- Fully inspectable and cleanable
- Fully removable and easily cleanable stainless steel foul air trap (FAT)
- Full drainability
- Internal radii equal or larger than 3 mm
- Fully welded hygienic joints
- Steel thickness min. 1,5 mm
- Edge infill
- ACO protective cover available
- Fully pickled and passivated

- BIM models are available in ACO Building Drainage BIM Revit libraries
- Certified according to EN 1253-1
- Hygienic design following EN 1672, EN ISO 14159 and EHEDG document 8, 13 and 44
- Available in 1.4301 (304) or 1.4404 (316L) grades of stainless steel
- Adjustable EasyFix leveling feet
- Wide range of gratings for various load classes including slip resistant solutions
- Certified fire protective solution available for classes EI 90 – EI 180 (EN 13 501-2)
- Silt basket available as accessory

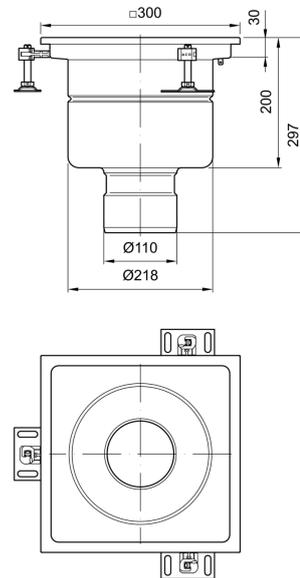

Item Technical Data 408004

Gully top dimensions [mm]	Outlet diameter Ø [mm]	Odour trap	Material
300 x 300	110	Without	1.4301

Accessories

	Description	Used with	Weight [kg]	Item number
	<p>ACO Easy FAT Replacement sealing ring: ■ 98403 Optional compatible silt baskets: ■ 416910 (1.4301) ■ 416911 (1.4404)</p>	<p>■ ACO gully 218, fixed height</p>	<p>1.34</p>	
	<p>BenefitsUser-friendly installation and maintenance; Complete ease in removing and cleaning; Minimum steel thickness of 1.2 mm; Fully pickled and passivated; Extensively tested and classified in accordance with EN 1253-1 guidelines-FeaturesMaximum flow rate with horizontal gully: 3.9 l/s; Maximum flow rate with vertical gully: 5.6 l/s; Material: 1.4301; Silt basket not included</p>			<p>449689</p>
	<p>BenefitsUser-friendly installation and maintenance; Complete ease in removing and cleaning; Minimum steel thickness of 1.2 mm; Fully pickled and passivated; Extensively tested and classified in accordance with EN 1253-1 guidelines-FeaturesMaximum flow rate with horizontal gully: 3.9 l/s; Maximum flow rate with vertical gully: 5.6 l/s; Material: 1.4404; Silt basket not included</p>			<p>449690</p>
	<p>ACO Easy FAT Replacement sealing ring: ■ 98403</p>	<p>■ ACO gully 218, fixed height</p>	<p>1.9</p>	
	<p>BenefitsUser-friendly installation and maintenance; Complete ease in removing and cleaning; Minimum steel thickness of 1.2 mm; Fully pickled and passivated; Extensively tested and classified in accordance with EN 1253-1 guidelines-FeaturesMaximum flow rate with horizontal gully: 3.6 l/s; Maximum flow rate with vertical gully: 5.8 l/s; Material: 1.4301; Silt basket included</p>			<p>449691</p>
	<p>BenefitsUser-friendly installation and maintenance; Complete ease in removing and cleaning; Minimum steel thickness of 1.2 mm; Fully pickled and passivated; Extensively tested and classified in accordance with EN 1253-1 guidelines-FeaturesMaximum flow rate with horizontal gully: 3.6 l/s; Maximum flow rate with vertical gully: 5.8 l/s; Material: 1.4404; Silt basket included</p>			<p>449692</p>
	<p>ACO tundish ■ Stainless steel ■ Material grade 1.4301 (304)</p>	<p>■ ACO gully top size 300 x 300 mm</p>		<p>413547</p>

	Description	Used with	Weight [kg]	Item number
	ACO tundish portable <ul style="list-style-type: none"> ■ Stainless steel ■ Material grade 1.4301 (304) 	<ul style="list-style-type: none"> ■ ACO drainage independent of visible edge dimensions 		415821
	<ul style="list-style-type: none"> ■ Fixed height, vertical ■ Telescopic, vertical ■ Made from 1.4404 (316) grade of stainless steel ■ NBR 	<ul style="list-style-type: none"> ■ ACO hygienic gully 218 <input type="checkbox"/> Fixed height, vertical <input type="checkbox"/> Telescopic, vertical 		416934
	ACO fire resistant kit for gully 218/ DN 110			416934
	ACO fire resistant kit for gully 218/ DN 160			416935
	Silt basket Stainless steel <ul style="list-style-type: none"> ■ 1,4 litre capacity 	<ul style="list-style-type: none"> ■ ACO hygienic gully 218 - Vertical <input type="checkbox"/> Fixed height or Telescopic ■ ACO hygienic box channel <input type="checkbox"/> Channel dimension <input type="checkbox"/> Width Wo [mm]: 300, 400, 500, 600, 800 <input type="checkbox"/> Outlet øD [mm]: 200 or welded with ACO hygienic gully 218 <input type="checkbox"/> Direction of gully outlet: vertical 		
	Material grade 1.4301 (304)			416908
	Odour trap Stainless steel <ul style="list-style-type: none"> ■ Height 50 mm 	<ul style="list-style-type: none"> ■ ACO hygienic gully 218 <input type="checkbox"/> Fixed height <input type="checkbox"/> Telescopic 		
	Material grade 1.4301 (304)			408220
	Material grade 1.4404 (316L)			408230
				
	Standard foul air trap support NBR	<ul style="list-style-type: none"> ■ ACO hygienic gully 218 <input type="checkbox"/> Telescopic 		408221
	Friction ring SBR	<ul style="list-style-type: none"> ■ ACO hygienic gully 218 <input type="checkbox"/> Telescopic 		408225

You can find further accessories under → <https://www.buildingdrainage.aco/search/?q=408004>