

TRANSFORMER CONTROLLER VRTE 5



For manual 5-step voltage control of single-phase motors, with 0-position. Regulation controlled by switch at front. Operation Indicator light on the housing. The controller is enclosed in a durable PVC.

Outgoing voltages:
VRTE: 80V, 110V, 140V, 170V and 230V




TECHNICAL DATA

VRTE5 9500032


Parameter	Value	Unit
Voltage	230	V
Frequency	50	Hz
Optional frequency	60	Hz
Current	5	A
Weight	5.4	kg
Enclosure class	54	IP

WIRING DIAGRAM

VRTE 3>13

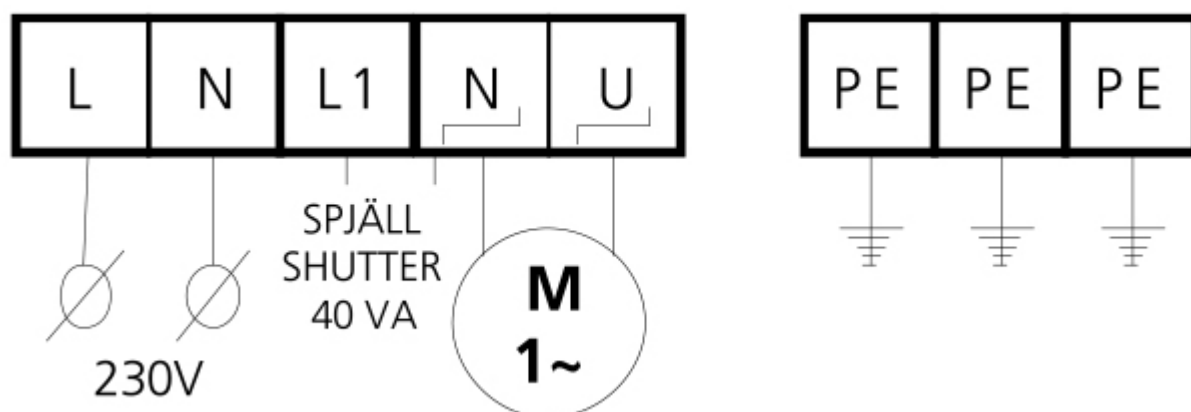

DIMENSIONS

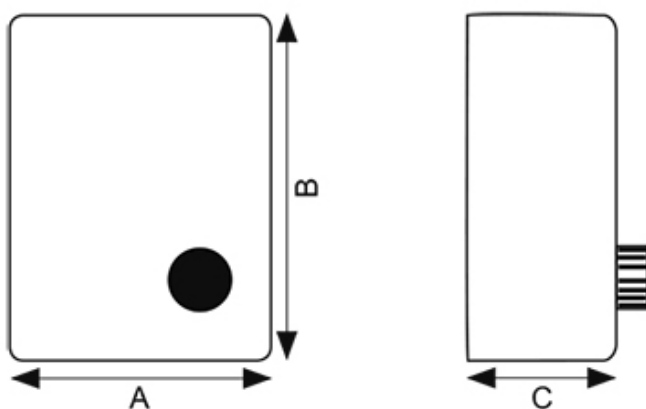

Type	(mm) A	B	C	Enclosure
VRTE C	84	160	88	PVC
VRTE 1	115	205	100	PVC
VRTE 3	170	255	140	PVC
VRTE 5	170	255	140	PVC
VRTE 7	200	305	140	PVC
VRTE 13	300	325	185	Steel