


Connection diagram

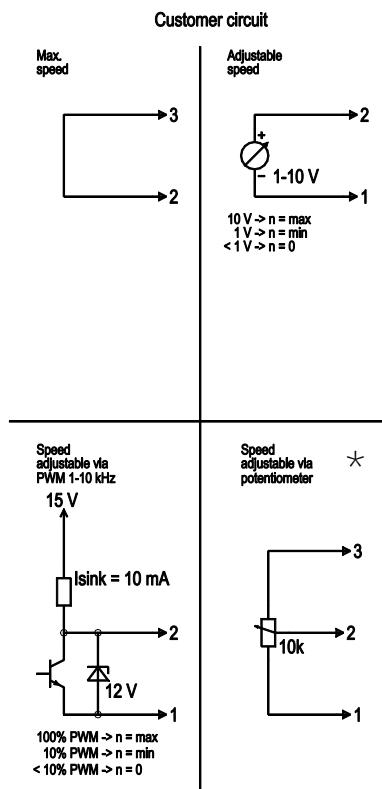

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	CON11	N	blue	Neutral conductor
	CON12	PE	green/yellow	Protective earth
	1	GND	blue	GND connection for control interface
	2	0- 10V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
	3	10V/ max 1.1mA	red	Voltage out 10 V / 1.1 mA, electr. isolated, not short-circuit-proof, Isink = 10 mA
	4	Tach	white	Tach out: Open collector, 1 pulse / revolution, electric. isolated, Isink max = 10 mA

* Built-in and connected potentiometer is included!