

Technical specifications

Diesel Generator Set

QIS 215

Voltage: 400/230 V

Frequency: 50HZ



Genset Image for illustration purposes only

TECHNICAL INFORMATION

Standby Power (ESP)	kVA	217
	kW	173
Prime Power (PRP)	kVA	197
	kW	157
Mechanical structure		Soundproofed
Engine		JOHN DEERE 6068HFG20
Alternator		MECC ALTE ECO38-2S/4A
Control card		DEEP SEA 4520
Measures (L x W x H)	mm	3,270 x 1,150 x 1,860
Empty weight	kg	2,210
Fuel tank	L	375
Acoustic pressure, LpA	dB(A) a 7	71
Acoustic power LwA	dB(A)	97

Voltages	Prime Power (PRP)		Standby Power (ESP)	
	(kVA)	(kW)	(kVA)	(kW)
380/220	197	157	217	173
400/230	197	157	217	173
415/240	197	157	217	173

Notes:

PRIME POWER: Electrical power data available at a variable load without limits of hours per year. An overload of 10 % is allowed for 1 hour of every 12. In accordance with ISO 8528/1 (2005) – PRP

STANDBY POWER: Electrical power data at variable load in an emergency in accordance with standard ISO 8528/1 (2005) – ESP. Overloads of emergency power are not allowed.

The standard reference conditions are: 25 °C, 100 kPa and 30% relative humidity. Gasoil density: 0.85 g/cm3. Gasoline density: 0.68 g/cm3.

■ INDEX

General description
Engine
Alternator
Bedplate
Soundproofed canopy
Electric Panel
ATS
Dimensions and Weight
Performance class
Regulation
Annex: Drawings

Grupos Electr6genos Europa, S.A. is a certified company with ISO 9001, ISO 14001, OHSAS 18001 and PECAL

We reserves the right to modify any characteristic of their equipment without prior warning.

Photographs representing the product range, while able to include options.

Weight and dimensions of a standard generator set.

Non-contractual document

Central Offices:

Pol6gono Industrial Pitarco II; Parcela 20

50450 Muel (Zaragoza) Spain

Tel.: +34 976 14 54 32

Fax: +34 976 14 54 31

info@gesan.com

After-sales Department:

Customer service: +34 976 14 54 33

Spare parts: +34 976 14 54 34

■ GENERAL DESCRIPTION

Specifically developed for the industrial applications, this stationary soundproof generator set is easy to use and straightforward to maintain. The available features & options are designed to fully meet the requirements of all industrial applications. The generator set will automatically start on mains failure and cool down and stop as soon as the mains come back. The generator set also controls the load transfer between mains (utility) and generator set. It can also be start-up by means of an external signal.

It's your solution for Predictable Power.

■ ENGINE

6068 series JOHN DEERE diesel 4 stroke engine, with turbo, with direct injection and mechanical regulation of the engine speed.

Engine brand	JOHN DEERE	Engine Capacity (c.c.)	6,800
Model	6068HFG20	Bore (mm)	106
R.P.M.	1,500	Stroke (mm)	127
Fuel	Diesel	Compression ratio	17:1
No. of cylinders	6 L	Type of regulation	Mechanical

Cooling System

Cooling of the sleeves using cooling fluid comprised of water and glycol at 50% in a closed circuit driven by the engine pump.

The circuit is completed with a blower fan driven by the engine, radiator, expansion tank, cooling fluid purge system towards the outside of the bedplate and protections of all the running surfaces.

Cooling type	Water	Limit ambient temperature (°c)	40
--------------	-------	--------------------------------	----

A boiler system with heating element is available as an option. An adjustable thermostat is included to maintain the temperature at optimum range and facilitate the starting of the engine.

Coolant heater power (W)	1 x 1000W
--------------------------	-----------

Exhaust System

The exhaust system consists of pipes, bellow, interior and exterior aluminized steel exhaust silencer that is highly resistant to corrosion, rain cap and hot part protections.

Number of exhaust	1	Inlet diameter (")	3.5
Outlet diameter (")	4.5		

Start system

Start system that uses an electrical motor, battery and battery charge alternator that is driven by the engine itself. The start motor and the battery charge alternator are originals from the engine manufacturer.

Starter voltage system (V)	12	Battery type	1 x 12V 74Ah - 680A
----------------------------	----	--------------	---------------------

Fuel supply system

The fuel system consists of a fuel tank, feed pump, water separator fuel filter including 30 microns filtering element, injection pump and injection nozzles.

The fuel tank is made from plastic to prevent rust and includes a filling connection with cap and key, a cleaning hatch and draining plug for easier maintenance. The fuel level is controlled thanks to a fuel level sensor with an analogue gauge mounted in the control cubicle.

Fuel tank capacity (L)	375
-------------------------------	-----

Fuel consumption panel (range according to the standard configuration)

Load	Prime Power (PRP)		Standby Power (ESP)	
	(l/h)	Range (h)	(l/h)	Range (h)
25%	11.6	32	12.8	29
50%	23	16.2	26	14.7
75%	35	10.7	38	9.8
100%	45	8.4	49	7.6

■ ALTERNATOR

Mecc Alte alternator with 4 poles, with a lifetime lasting greased bearing, H class insulation, without brushes, 2/3 coil and AVR (Automatic Voltage Regulator)

Protection of all the windings by means of 2-part high quality polyester resin impregnation. The stator windings receive a double impregnation. Final finish with a coat of EG43 varnish.

Excitation system with MAUX auxiliary winding with overload capacity 3 times the nominal current for 20 s.

Joining of engine and alternator through flexible disc coupling.

Regulations:

- CEI 2-3
- IEC 34-1
- EN 60034-1
- VDE 0530
- BS 4999-5000
- CAN/CSA-C22.2 No14-68-No100-95
- ISO 8528:3

Low wave distribution:

- THC < 4%
- THD < 4%
- THF (IEC) < 2%
- TIF (NEMA) < 40

Incorporates electromagnetic emissions suppressor in accordance with standard VDE 0875, class K.

Brand	MECC ALTE	Voltage Stability	±1%
Model	ECO38-2S/4A	Performance at 75% p.f. 0.8 (%)	93
Alternator Power (kVA)	220 / Standby (SB27)	Performance at 100% p.f. 0.8 (%)	93
Number of wires	12	Direct subtransient reactance X"d (%)	5.9
IP Alternator	IP 23	Subtransient time constant, T"d (ms)	12
Excitation system	MAUX	Zero sequence reactance, Xo (%)	2.5
AVR model	DSR	Short-circuit ratio, Kcc	0.5

▪ BEDPLATE

The engine-alternator set is coupled to the bedplate by means of anti-vibration shock mounts that absorb almost all the vibrations.

The base frame is made of a phosphate, passivated steel profile with polyester dust paint that guarantees a resistance of up to 480 hours in a saline mist chamber in accordance with standard ASM B-117-09.

The base frame is able to hold 100% of the liquids of the genset, reducing any potential environmental impact. It has a drainage plug.

▪ SOUNDPROOFED CANOPY

Soundproof generator set by means of galvanized, phosphate steel, passivated and finish using polyester dust paint that guarantees a resistance of at least 720 hours in a saline mist chamber in accordance with standard ASM B-117-09.

The canopy includes an external access to the lifting beam and push to close latches with key. The lifting beam is available as an option.

It is lined inside with a noise-absorbing material of polyurethane foam with a 30 mm thick waterproof protector veil with a density of 25 kg/m3.

It also has an emergency shutdown pushbutton that is accessible from the outside.

▪ ELECTRIC PANEL

Easily accessed control cubicle integrated in the generator set with digital controller providing advanced engine monitoring and protection features. Performance and maintenance requirements can also be observed. The cubicle includes multi-poles thermal-magnetic protection circuit breaker against overloads and short-circuits.

Has a SCHNEIDER brand circuit breaker, manually actuated, with thermal-magnetic protection against overloads and short-circuits.

Circuit Breaker rated current (A)	400A 4P R	Battery charger	DSE 9150 - 12V 2A
--	-----------	------------------------	-------------------

Has a DEEP SEA battery charge maintainer, designed to be permanently connected to the battery and maintains it charged to its maximum capacity.

Has no moving parts. The charger switches to floating mode when the charge is complete

Control Card

DEEP SEA control plate, DSE 4520 with grid monitor that starts-up the generator set when it detects a failure in the electrical power supply from the grid and sends a signal to the switching panel to switch from the grid position to the group position. Once the power supply has been re-established, it sends an order to the switching panel to transfer the generator set power to the grid and shuts-down the generator set once it has cooled down. It also starts-up the generator set using an external signal.

Also, control plate DSE 4520 checks a large number of parameters of the generator set which allows it to display information, statuses and alarms. If required, it will shutdown the generator set: Due to high coolant fluid temperature, low oil pressure, low coolant fluid level, etc.

Includes a LCD screen with lighting, 2 navigation menu buttons, independent operational mode buttons, and alarms and status indicating LEDs.

Communications via USB, and Completely configurable using a PC in Windows environment and free Scada type software in real time.

Includes reading and displaying of parameters with RMS values, real time clock, events history log up to 15 events and programming of alarms, events, start-ups and shutdowns.

Operating modes: START-UP, SHUTDOWN, AUTO, MANUAL AND TEST.

Generator

- Generator voltage (L-N)
- Generator voltage (L-L)
- Generator frequency
- Generator current
- kW
- kVA
- kWh
- kVAh
- Power factor

Grid

- Grid voltage (L-N)
- Grid voltage (L-L)
- Grid frequency

Engine

- Turn speed
- Cooling fluid temperature
- Oil pressure
- Hour meter
- Battery voltage
- No. of start-ups
- Fuel level

Protections

- Start-up fault (generator set shutdown)
- High coolant temperature (alarm and generator set shutdown)
- Low oil pressure (alarm and generator set shutdown)
- Low fuel level (alarm)
- Low cooling fluid level (generator set shutdown)
- Overload (alarm and generator set shutdown)
- Battery voltage high (alarm)
- Battery voltage low (alarm)
- Battery charge alternator failure (alarm)
- Generator low frequency (alarm and shutdown)
- Generator high frequency (alarm and shutdown)
- Generator low voltage (alarm and shutdown)
- Generator high voltage (alarm and shutdown)
- External emergency shutdown (shutdown)
- Engine overspeed (shutdown)
- Maintenance interval (alarm)



■ ATS

Optional cabinet for switching between the grid and the generator set by means of a Socomec brand motorized switch with an integrated mechanical and electrical interlocking device.

Allows for the padlock locking function. Includes a Manual / Automatic mode selector and emergency manual control.

Safety switching for isolating the loads. High dynamic resistance against short-circuits.


Position indicator with fully visualized cut-off. Stable positions not affected by changes in voltage and mechanical vibrations. External electrical control of the positions and test sequences.

High number of operations. IP54 protection. Connections: Lower/lower.

ATS	4P 330A 160-333V L-N CCM
------------	--------------------------

■ DIMENSIONS AND WEIGHT

Length, L (mm)	3,270
Width, A (mm)	1,150
Height, H (mm)	1,860
Weight (kg)	2,210

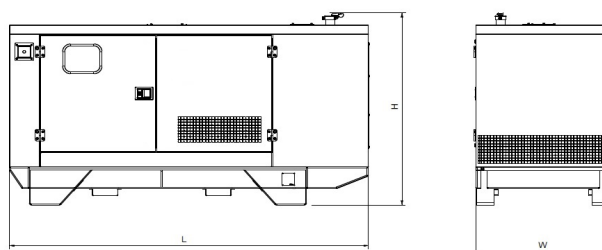

■ PERFORMANCE CLASS

Execution class in accordance with ISO 8528/5 (2005) taking into account the behaviour of the generator set in a permanent mode of operation with different load levels, as well as in a temporary mode of operation due to shocks in the load.

Performance class	G2
--------------------------	----

■ REGULATION

The generator set has a CE Marking that includes the following directives:

- 2006/42/EC Machine Safety.
- 2014/35/EU Low Voltage.
- 2014/30/EU Electromagnetic compatibility.
- 2005/88/EC Noise emissions of machines outdoors in soundproof generator sets.

Regulation (EU) 2016/1628 Gases and contaminating particles emissions only for groups within its scope of application.




Applicable international regulations:

- ISO 8528
- ISO 3046
- BS 5000
- IEC 60034

CONFIDENTIAL:







This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

00				
Ed	Position	Modified from	Date	Intr./Appd.

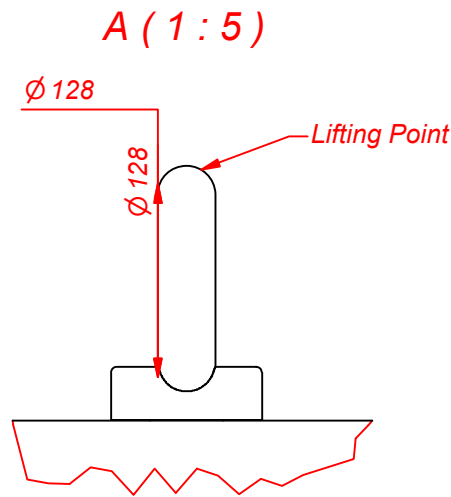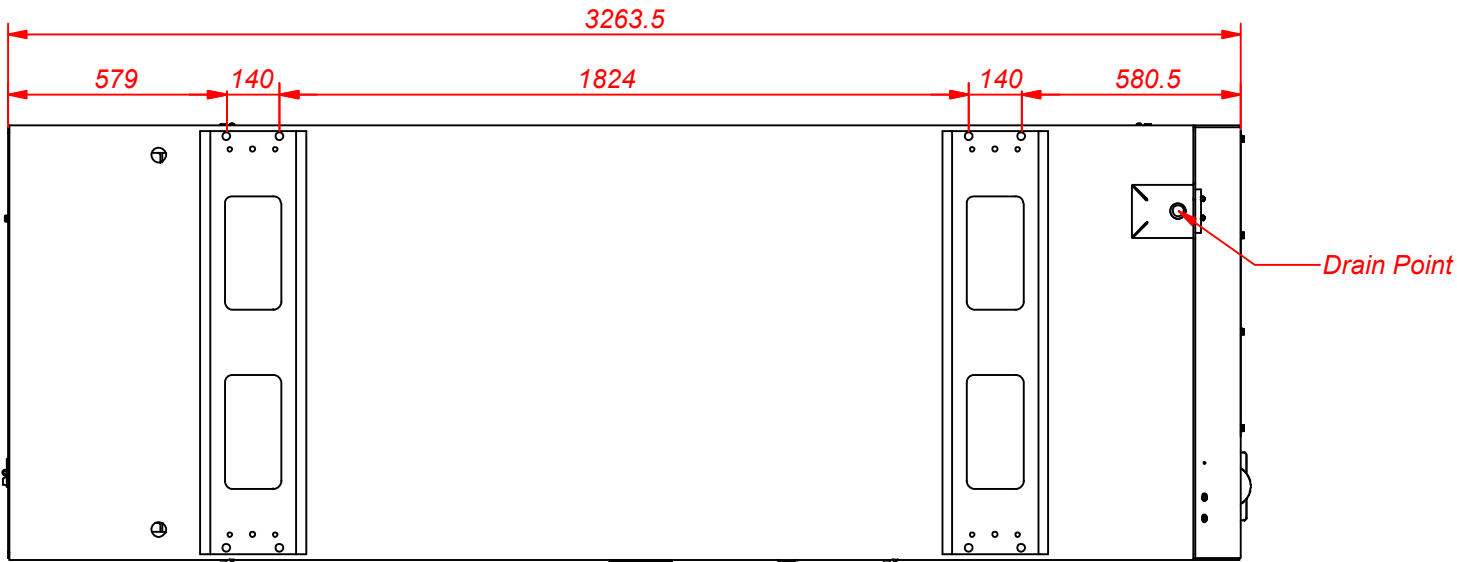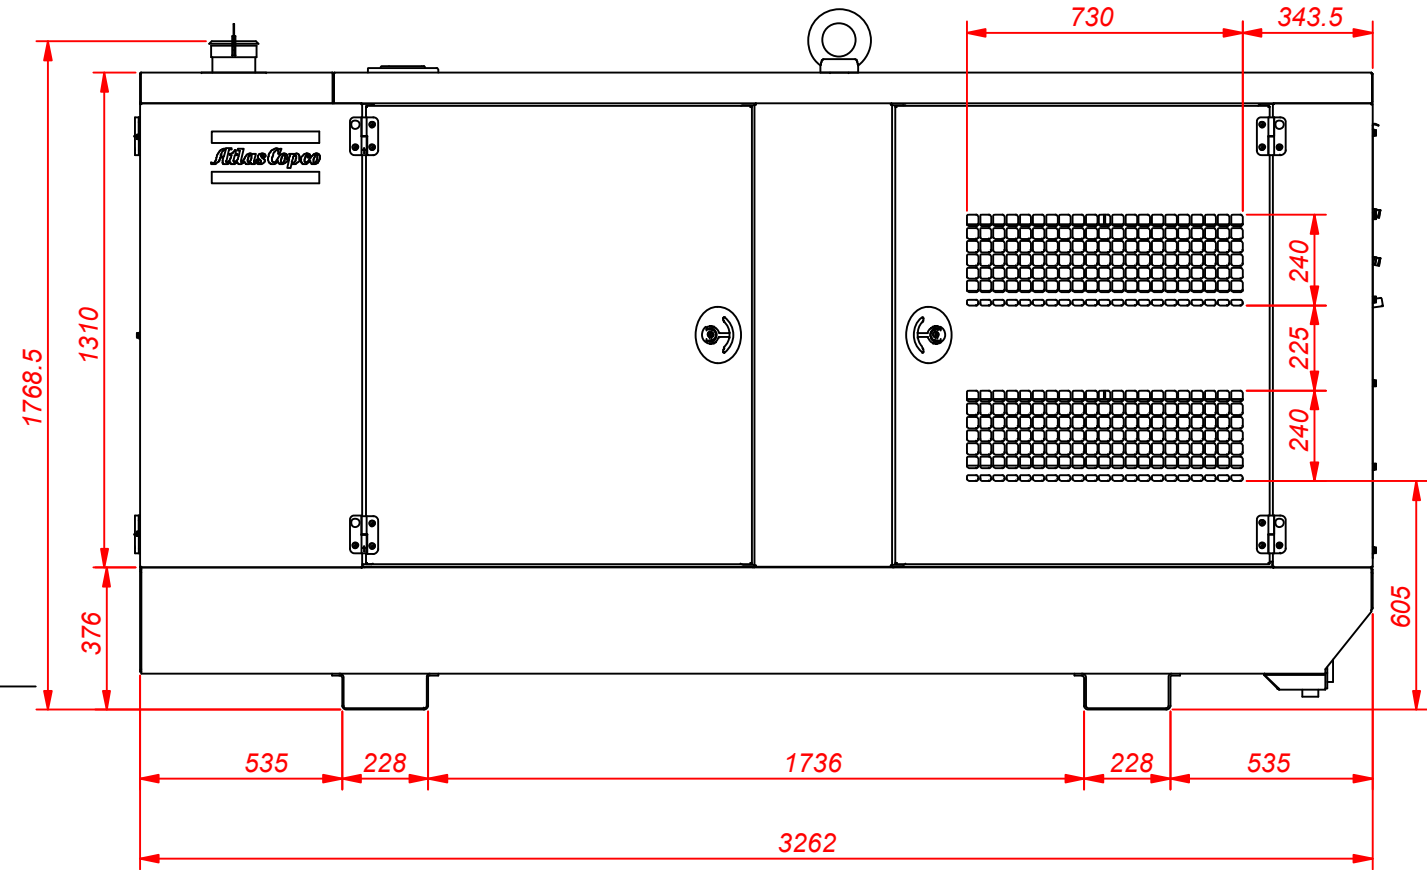

BASIC UNIT								
TYPE	WET MASS Kg	Xz mm	Yz mm	Zz mm	NET MASS Kg	Xz mm	Yz mm	Zz mm
Q/S/QES/CPSPG 6068TF220	2425	1400	575	675	2100	1400	575	675
Q/S/QES/CPSPG 6068HF120	2535	1400	575	675	2210	1400	575	675
Q/S/QES/CPSPG 6068HFG20	TBD	1400	575	675	TBD	1400	575	675

WET MASS = Wet engine and radiator (oil, coolant) and full tank.
NET MASS = Dry engine (without coolant and oil) and empty tank.

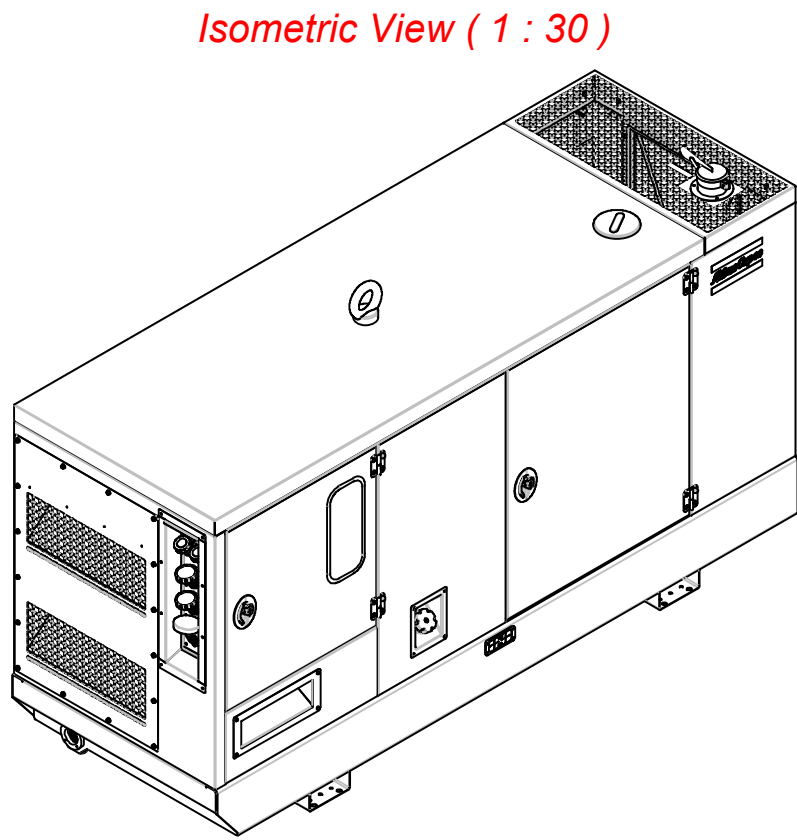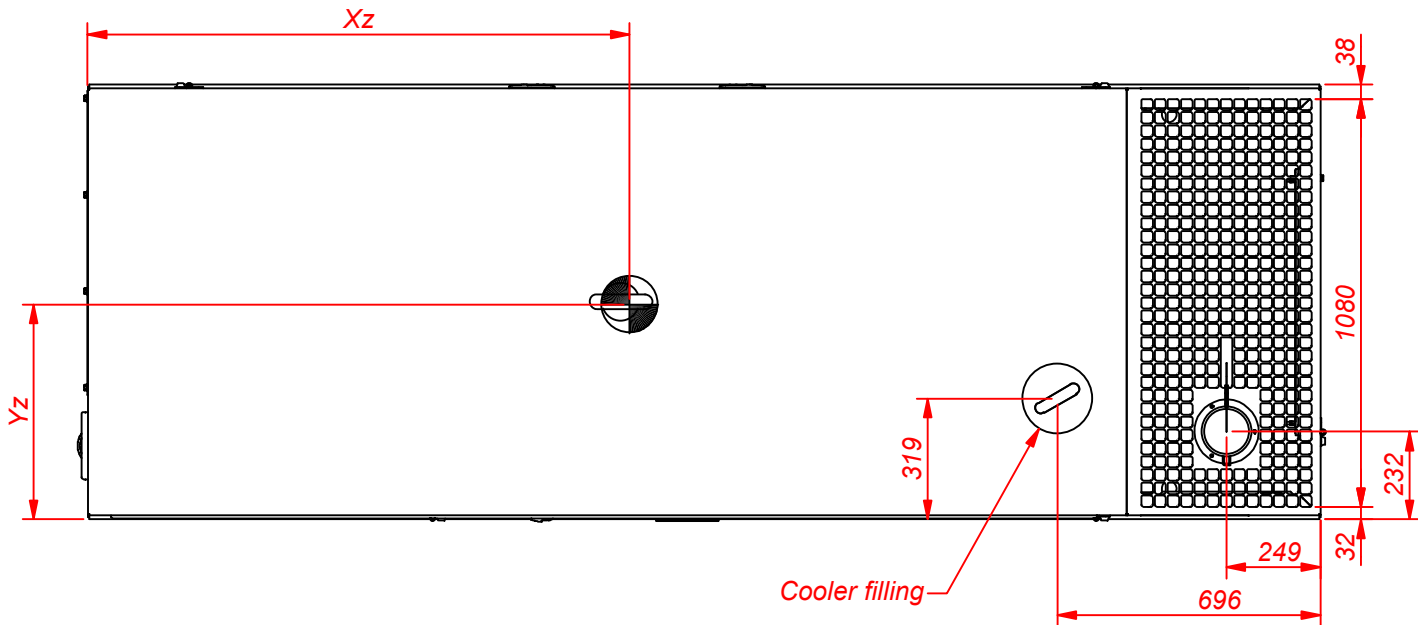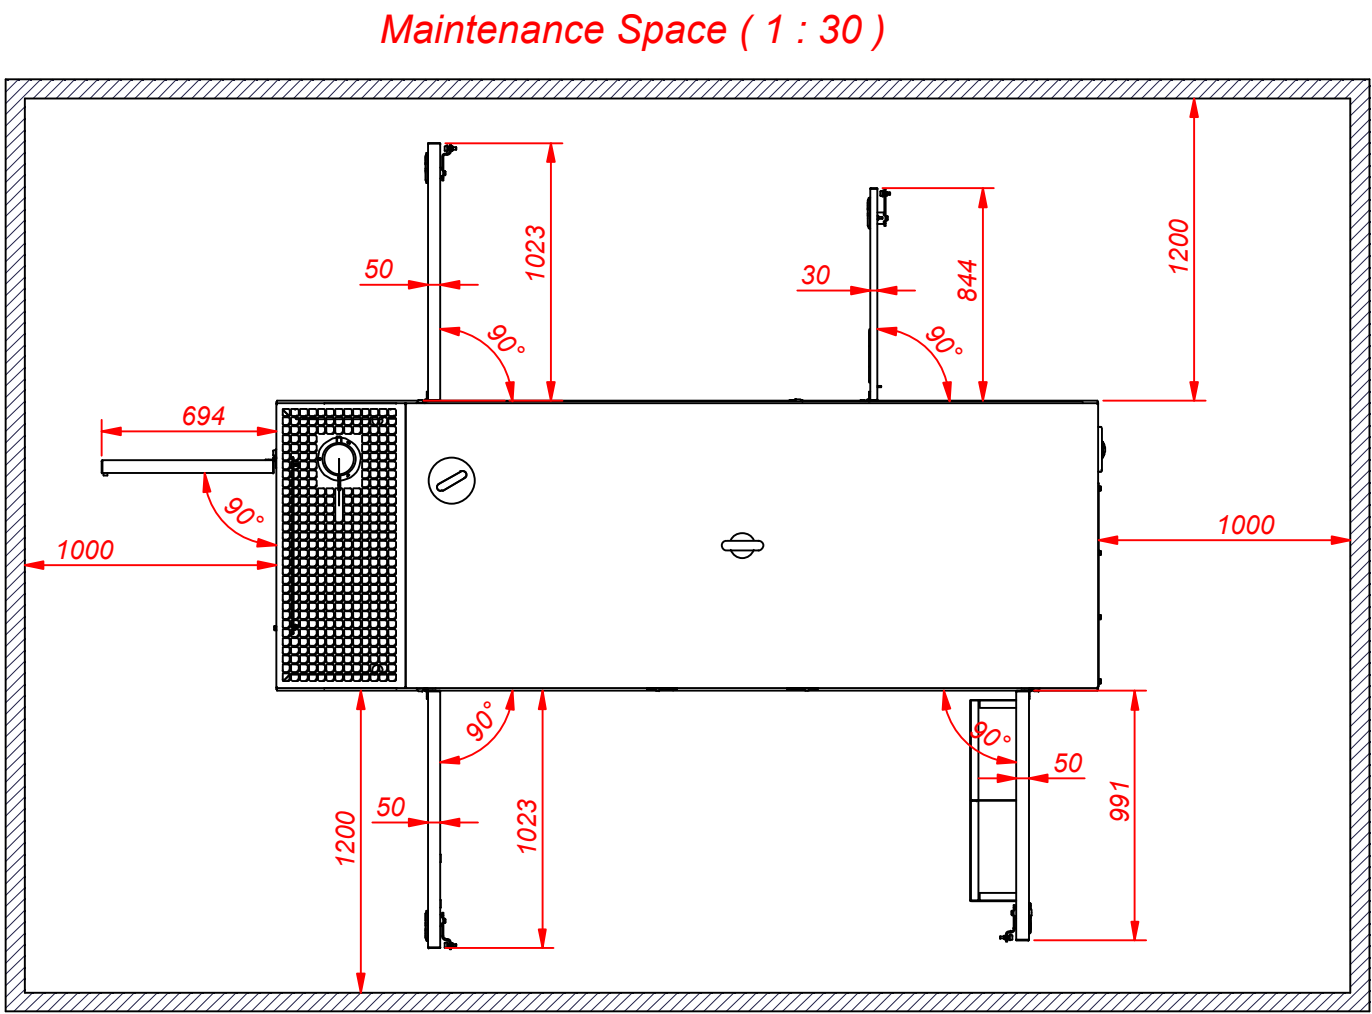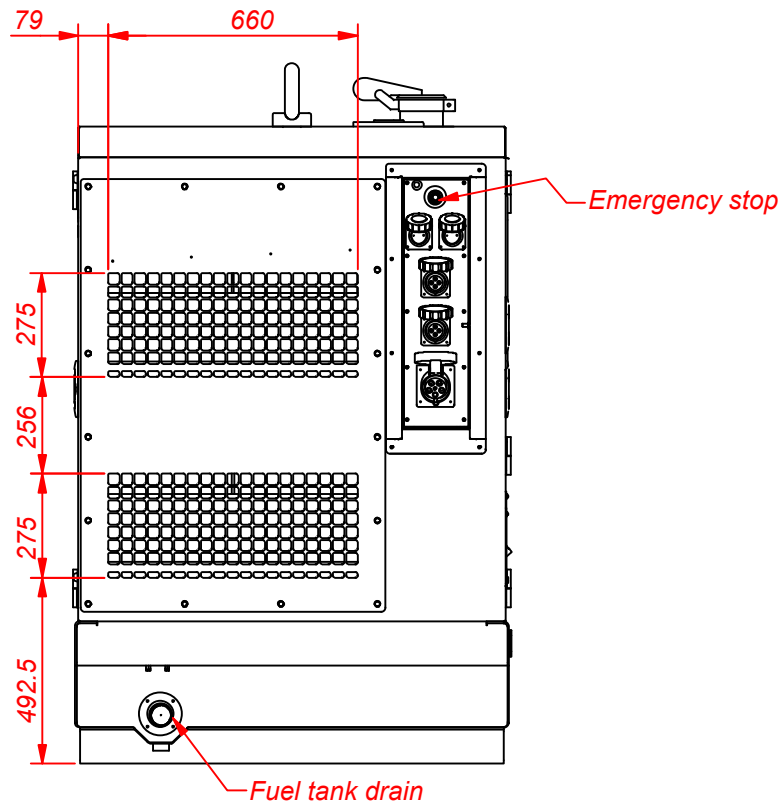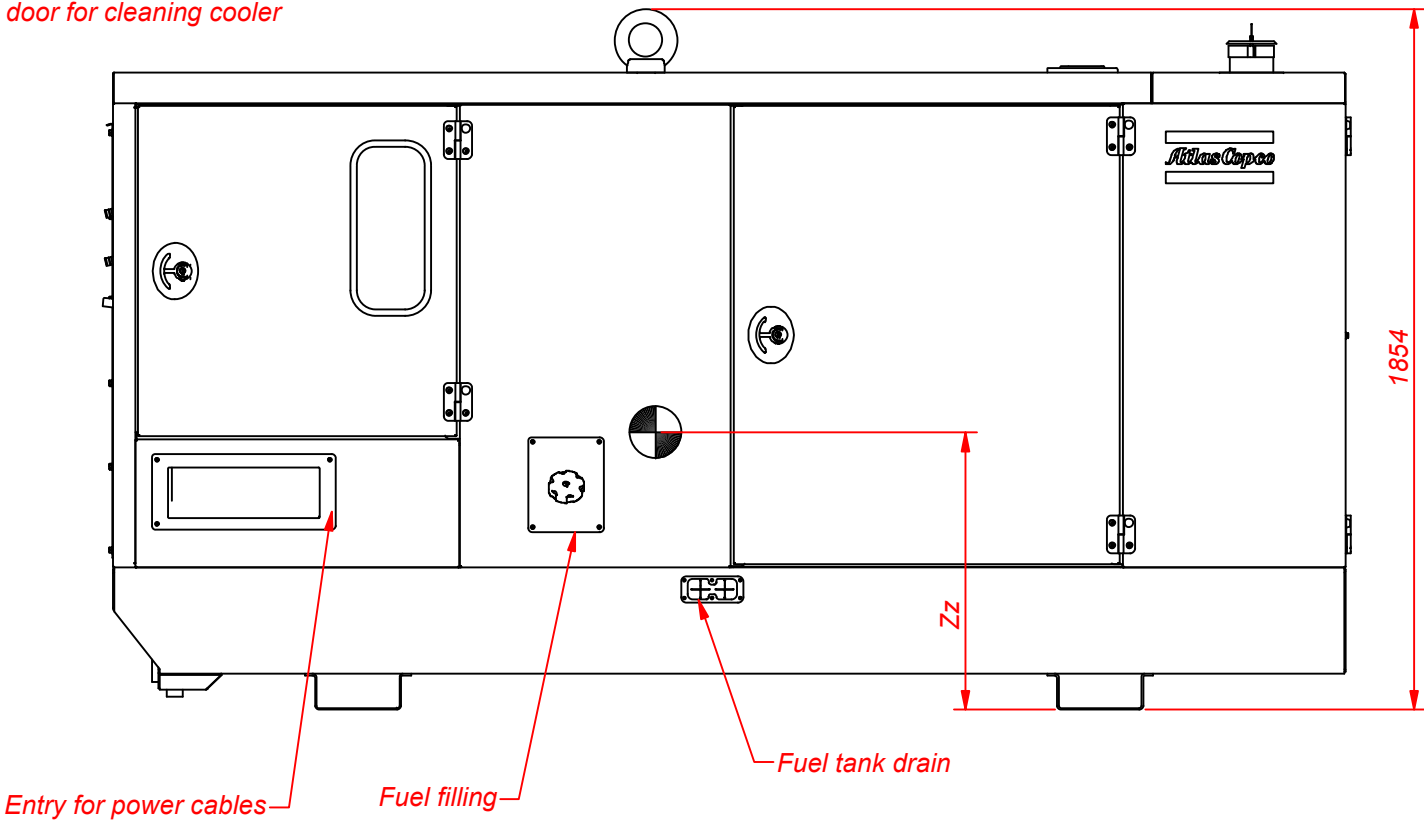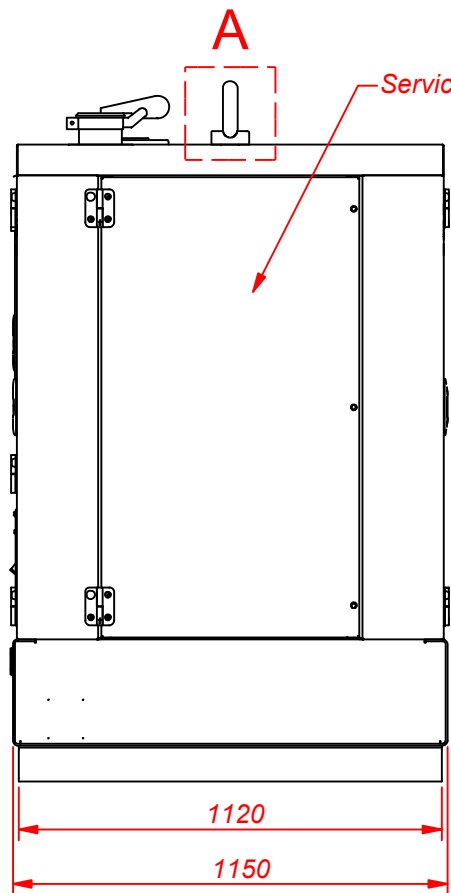




Tolerances, if not indicated, according to:		General tolerances							
		1350K - mK							
Name		DIMENSION DRWG				QIS/CPSPG; CD		Confidentiality Class acc. to 1102 K	
Material								Confidential	
Treatment						Thickness:		INV	
<div><div></div><div>Atlas Copco</div></div>		Scale		Family		A2 Compare		Drawing owner	
		Drawn by estfh		Blank nr.		Replaces		ESF	
STATUS		Version Drwg 00		Blank wt. Kg		Finl wt. Kg		Designation	
Approved		Des checked.		Prod checked.		Approved.		Date	
						22/06/2016		1636011127	
								Sheet 1 / 8	

CONFIDENTIAL:

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

00				
Ed	Position	Modified from	Date	Intr./Appd.




SKID option

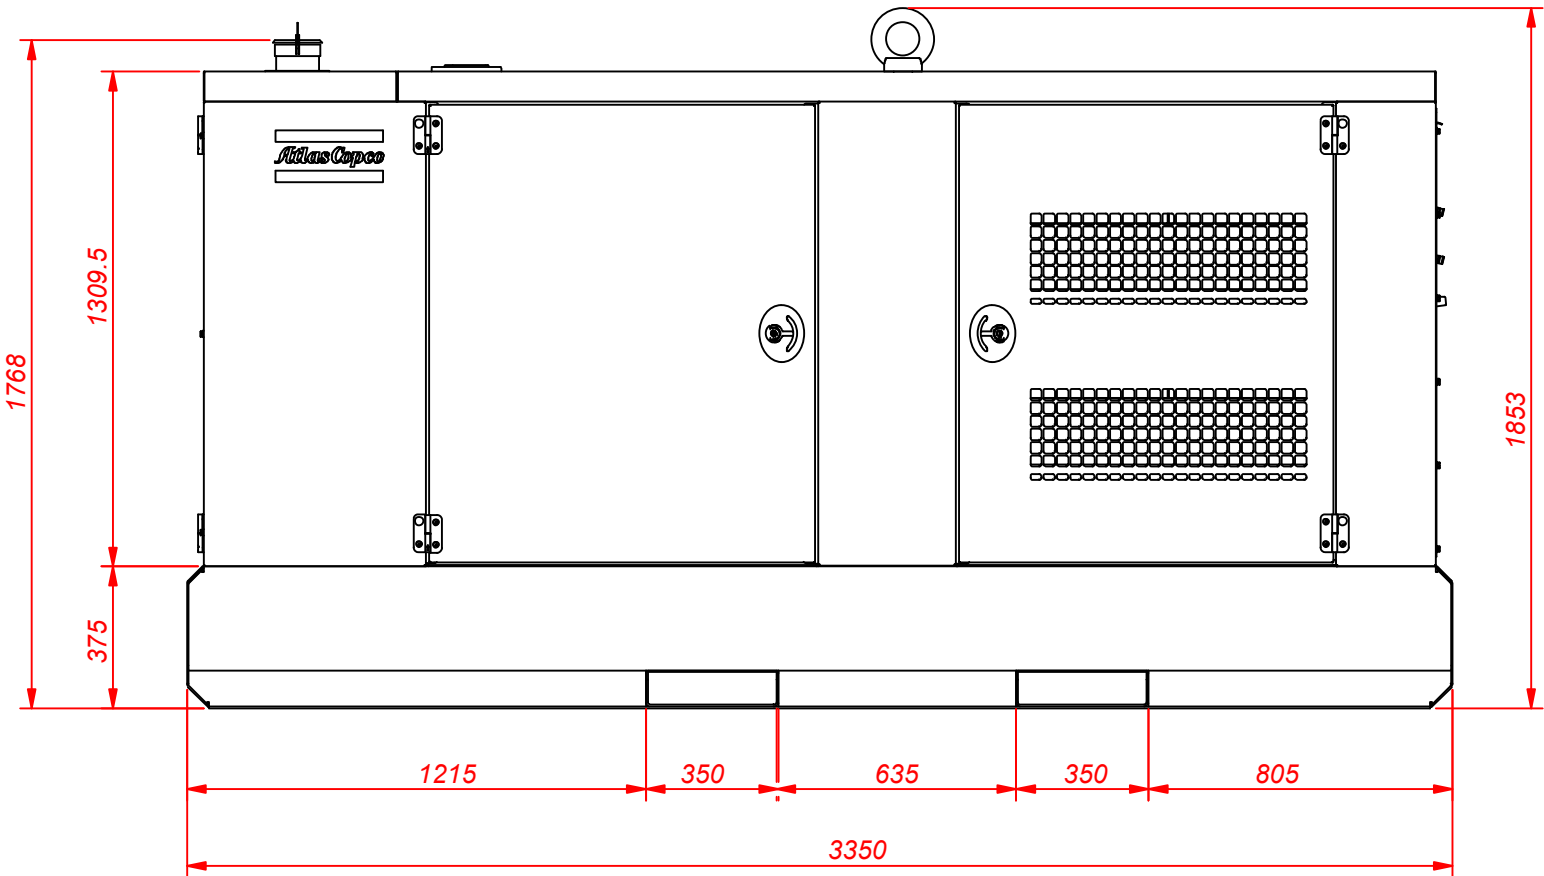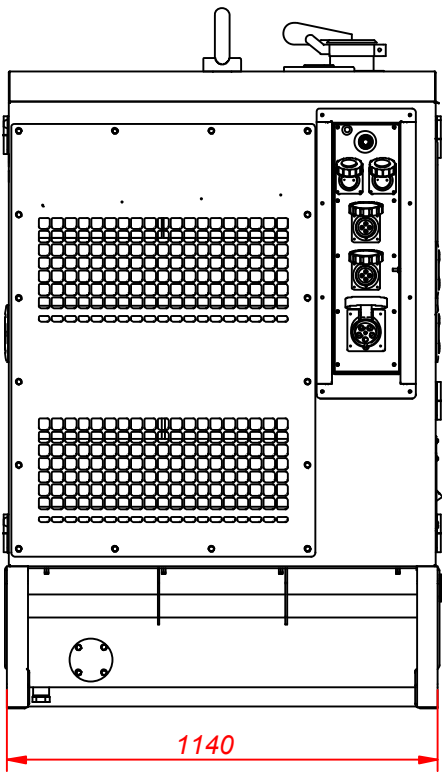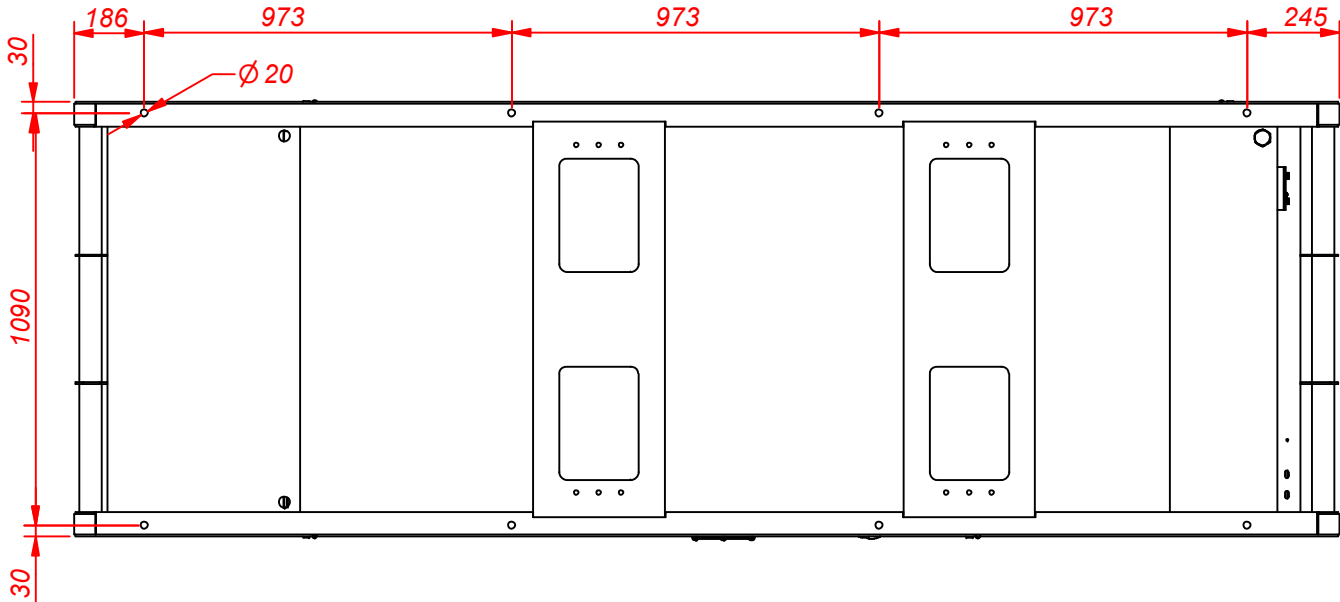


24H SKID option

BASIC UNIT								
TYPE	WET MASS	Xz	Yz	Zz	NET MASS	Xz	Yz	Zz
	Kg	mm	mm	mm	Kg	mm	mm	mm
QIS/QES/CPSG 6068TF220	3157	1400	575	675	2342	1400	575	675
QIS/QES/CPSG 6068HF120	3267	1400	575	675	2452	1400	575	675
QIS/QES/CPSG 6068HFG20	TBD	1400	575	675	TBD	1400	575	675


WET MASS = Wet engine and radiator (oil, coolant) and full tank.
NET MASS = Dry engine (without coolant and oil) and emty tank.

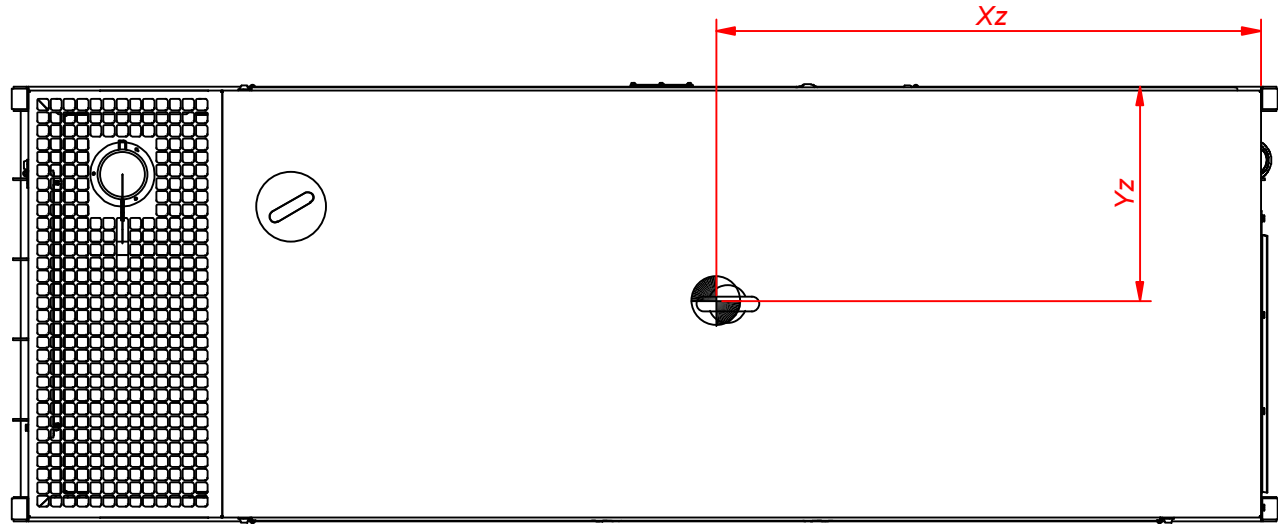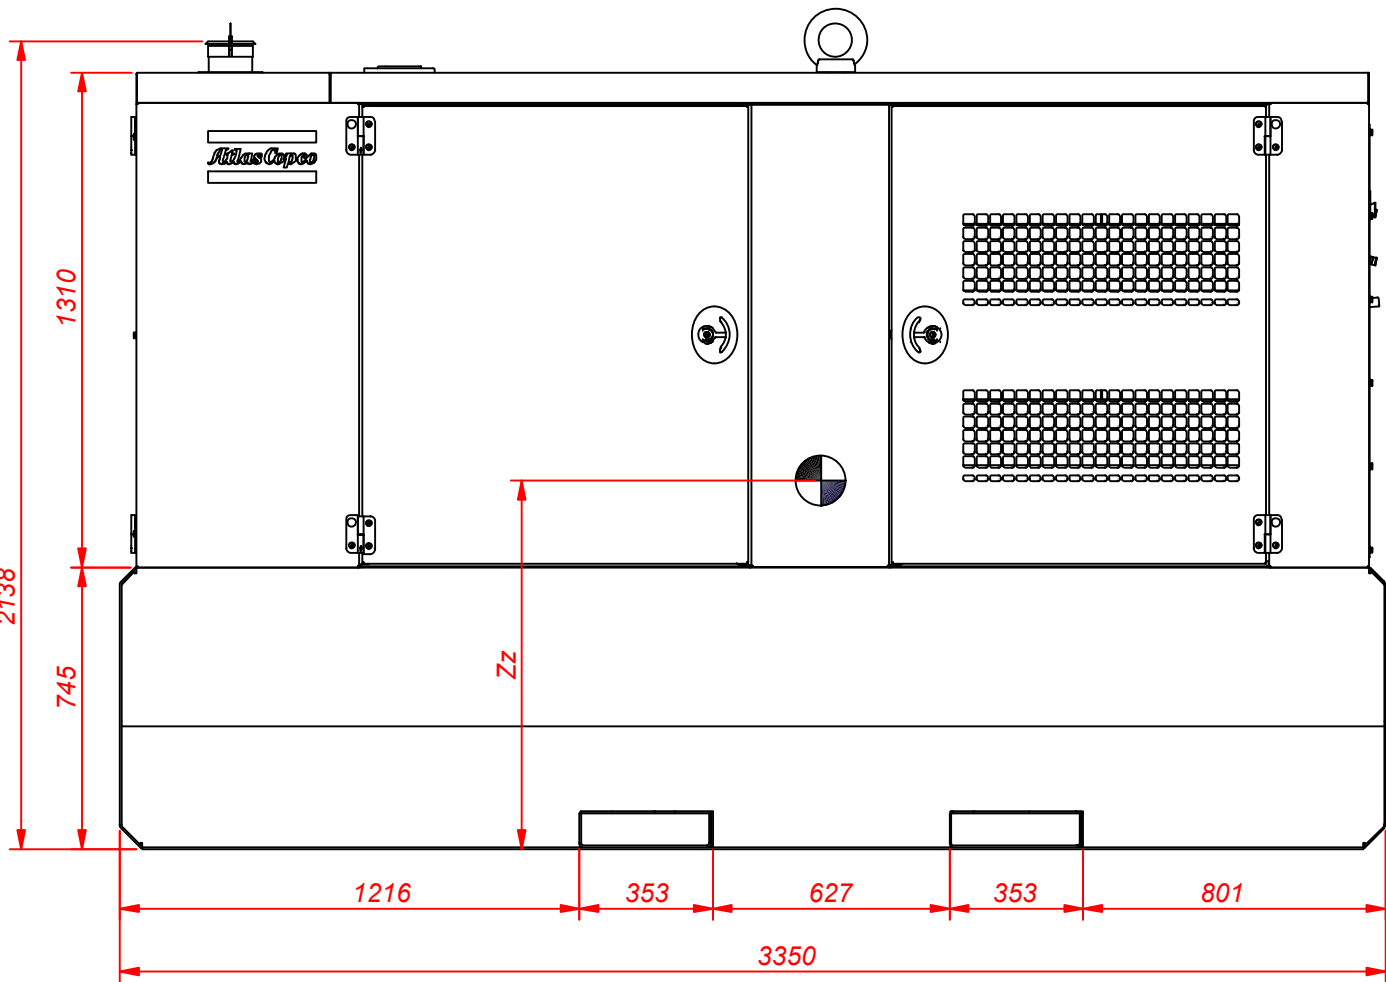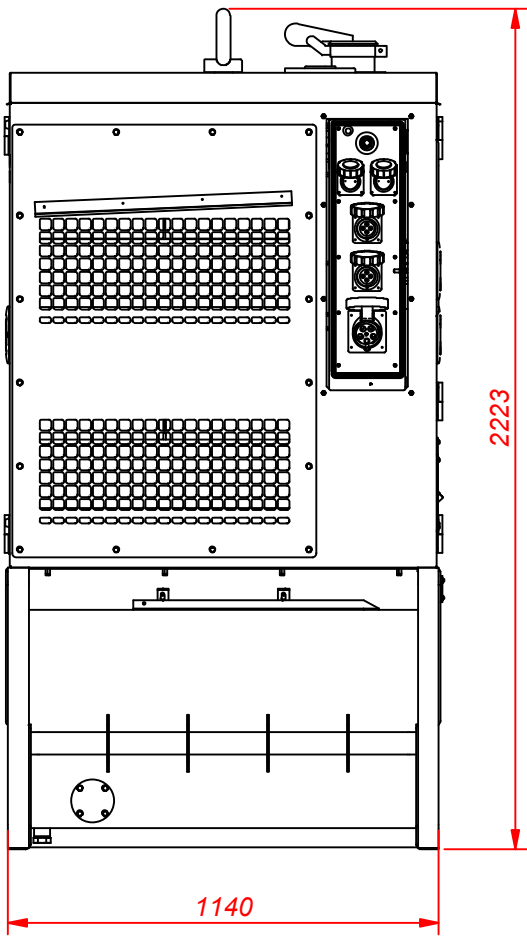

Tolerances, if not indicated, according to:		General tolerances					
		1350K - mK					
Name		DIMENSION DRWG			QIS/CPSG; CD		Confidentiality Class acc. to 1102 K
Material							Confidential
Treatment					Thickness:		INV
		Scale	Family	A2	Compare		Drawing owner
		Drawn by esth	Blank nr.		Replaces		ESF
STATUS		Version Drwg 00	Blank wt. Kg	Finl wt. Kg	Designation		Sheet 2 / 8
Approved		Des checked.	Prod checked.	Approved.	Date 22/06/2016	1636011127	

Rest of dimensions are equal to standard unit

1636011127	00
Parent 3D model	3D Model Edition




ESF





CONFIDENTIAL:



This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

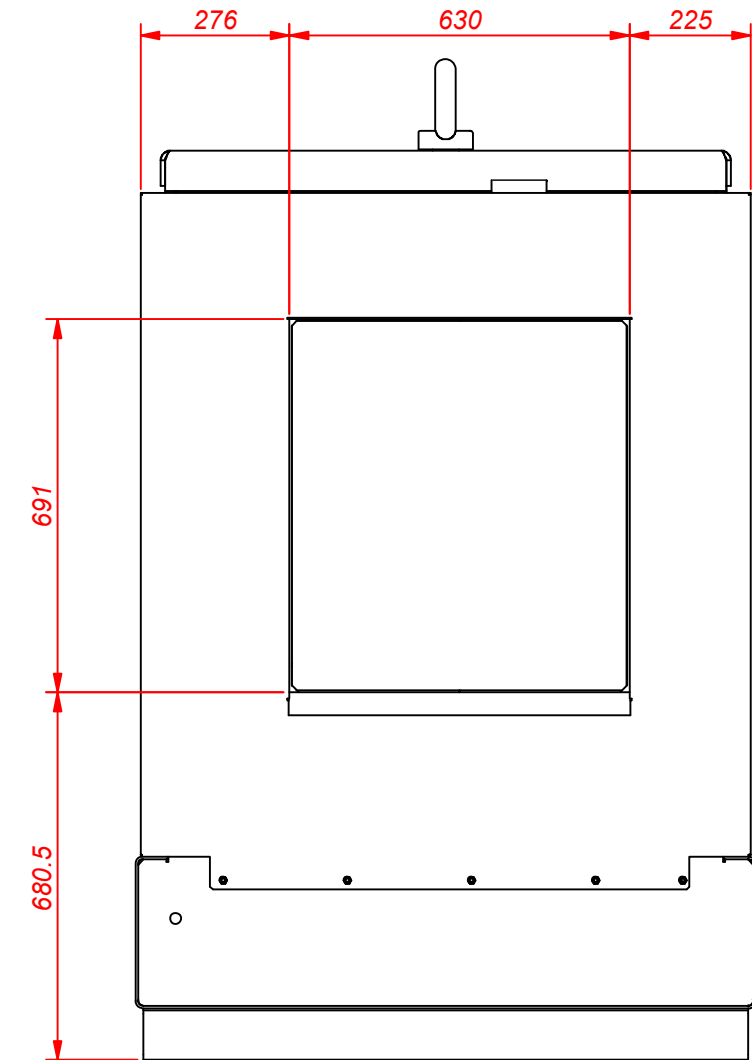00				
Ed	Position	Modified from	Date	Intr./Appd.

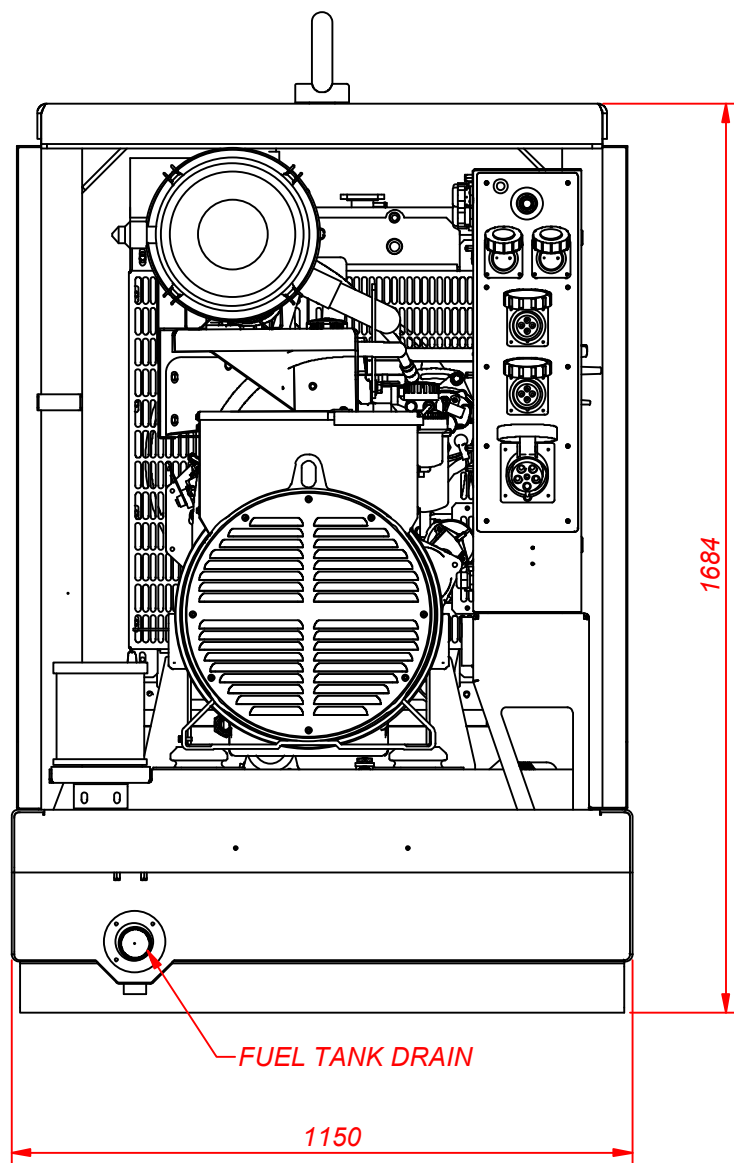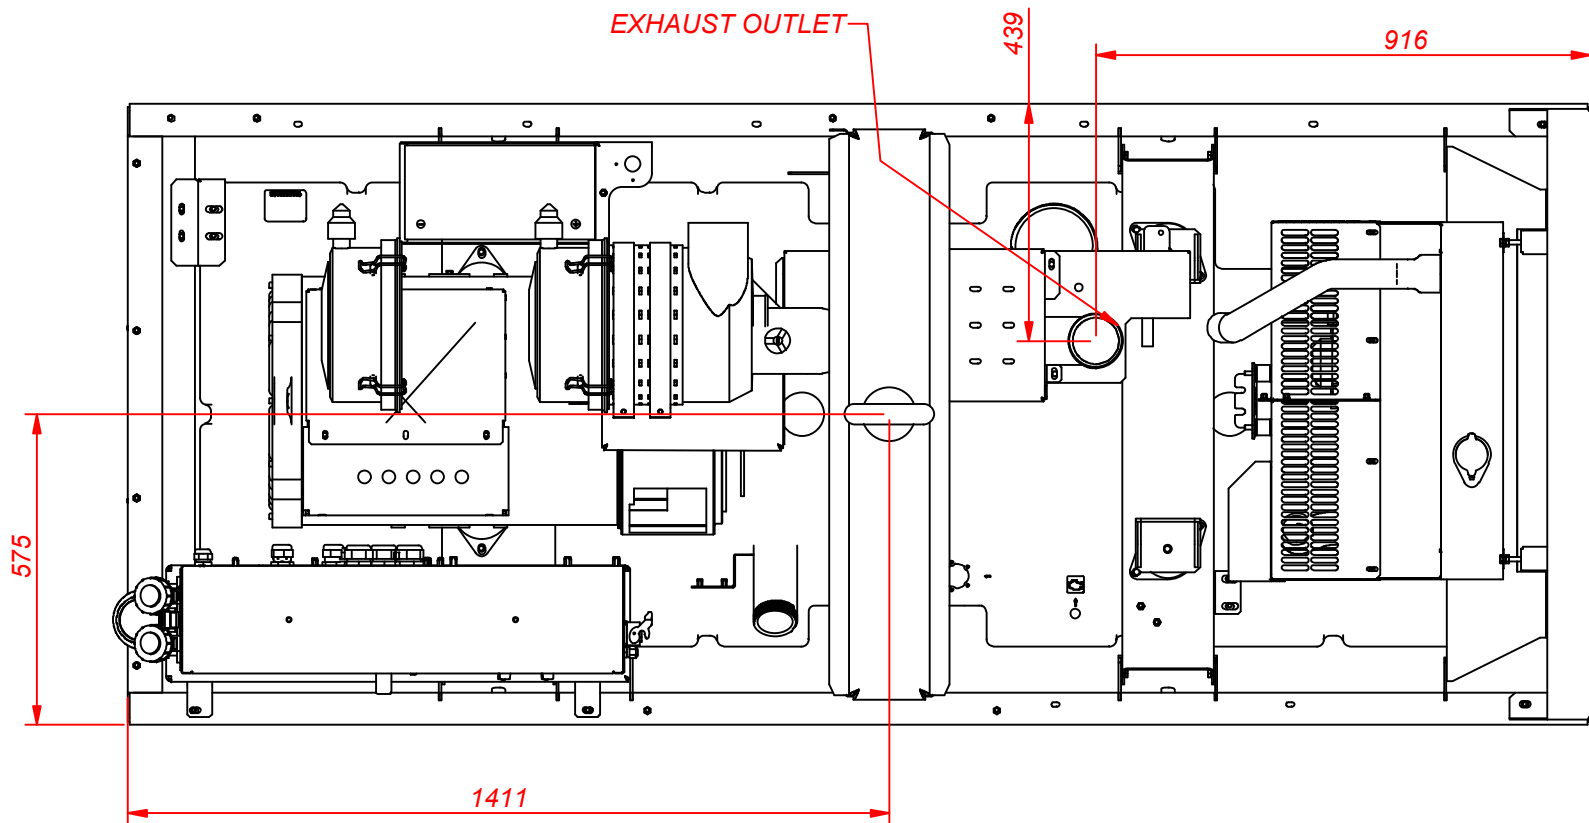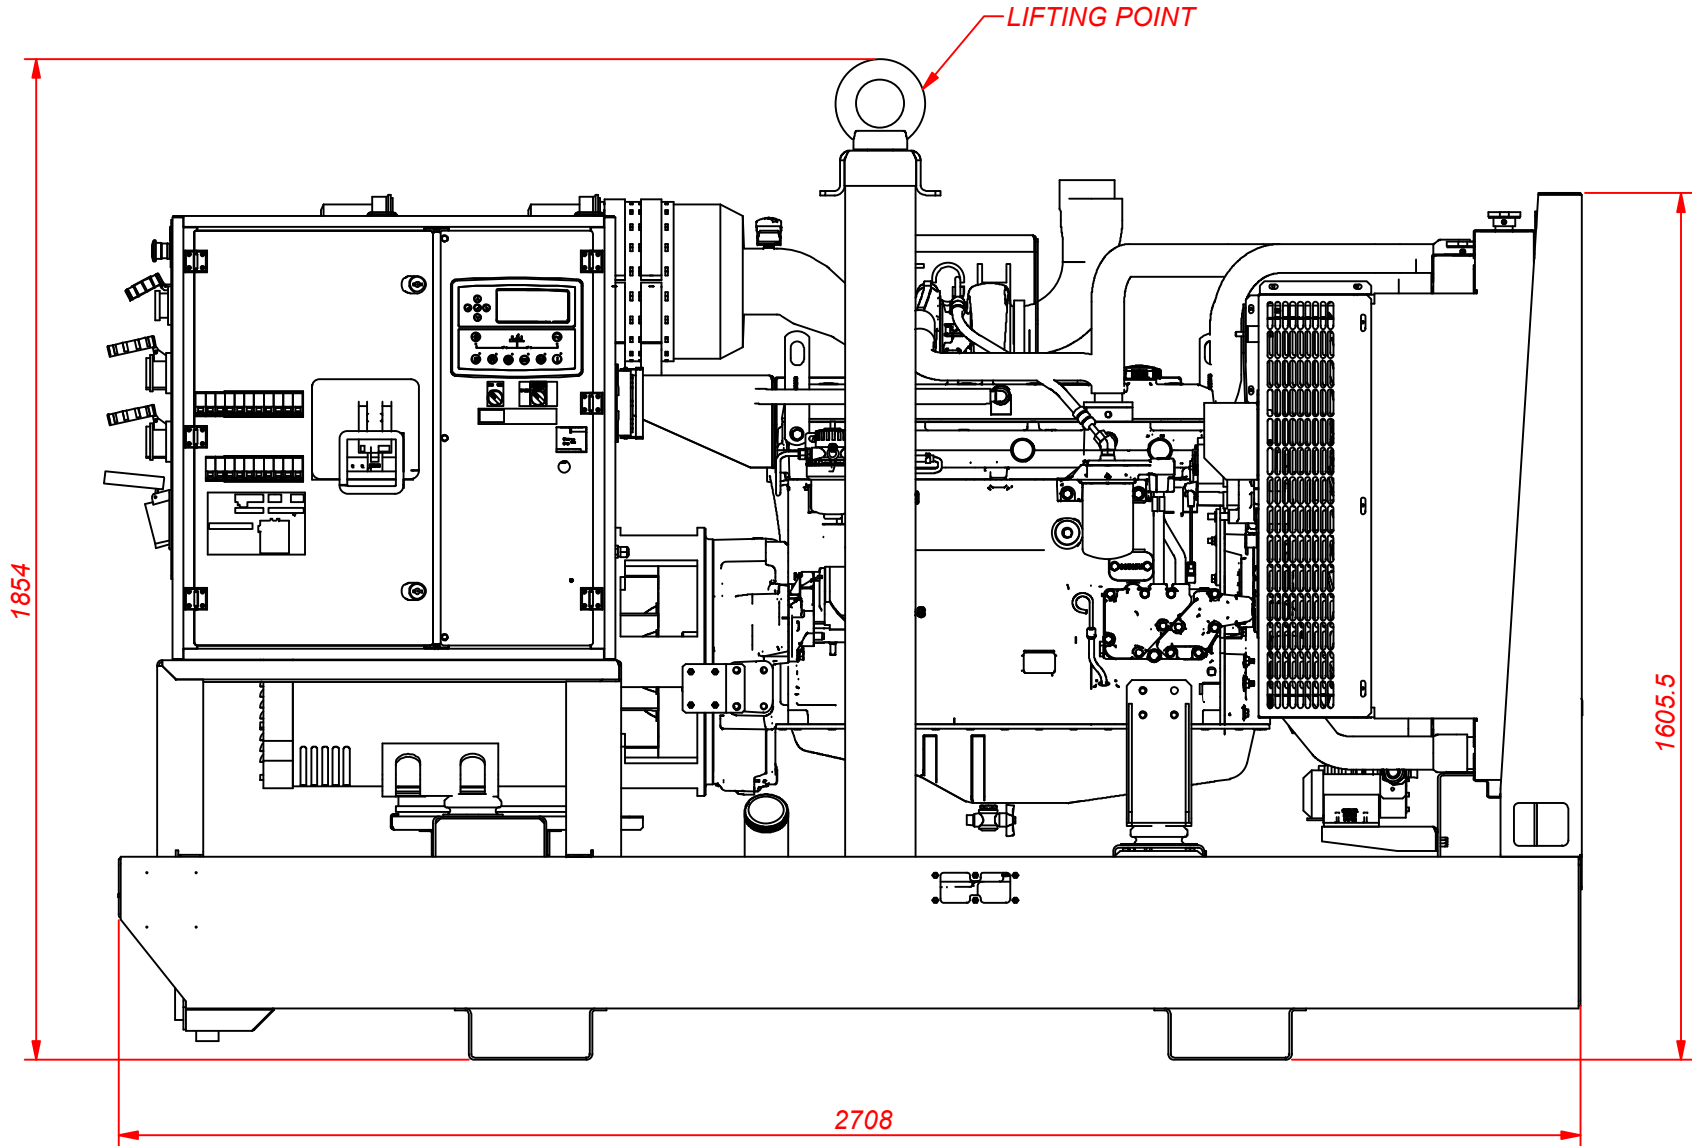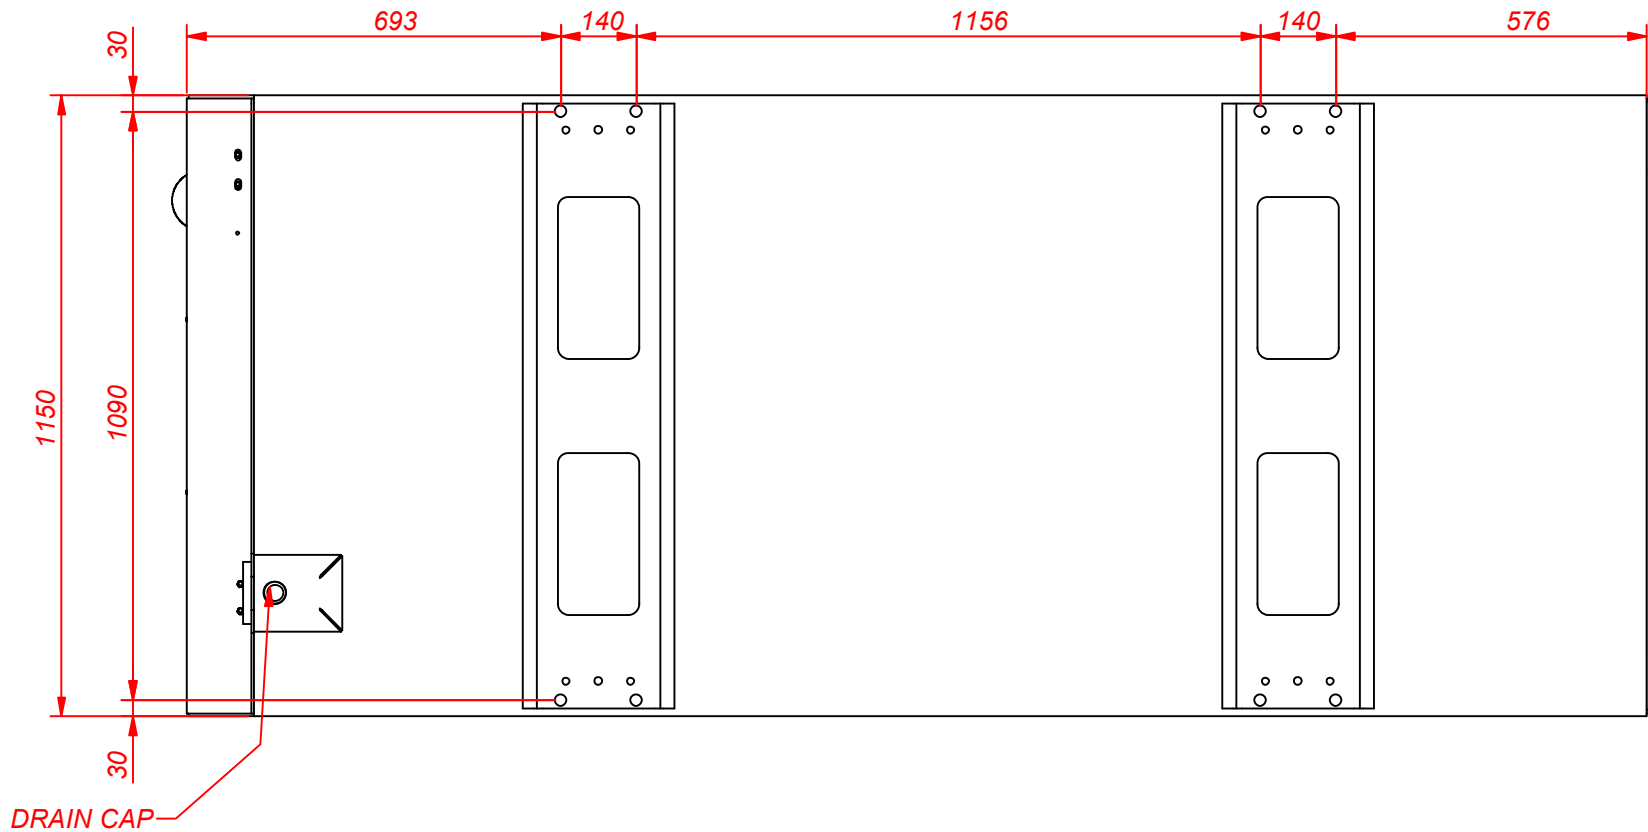

6068TF220



Tolerances, if not indicated, according to:																
Name										DIMENSION DRWG		QIS/CPSPG; CD		Confidentiality Class acc. to 1102 K		
Material														Confidential		
Treatment												Thickness:		INV		
		Scale		Family			A2	Compare			Drawing owner					
		Drawn by esth		Blank nr.				Replaces			ESF					
STATUS		Version Drwg 00		Blank wt. Kg		Finl wt. Kg		Designation			Sheet 3 / 8					
Approved		Des checked.		Prod checked.		Approved.		Date 22/06/2016		1636011127						

1636011127	00
Parent 3D model	3D Model Edition








Drawing owner
ESF

CONFIDENTIAL:

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.


00				
Ed	Position	Modified from	Date	Intr./Appd.

6068HF120

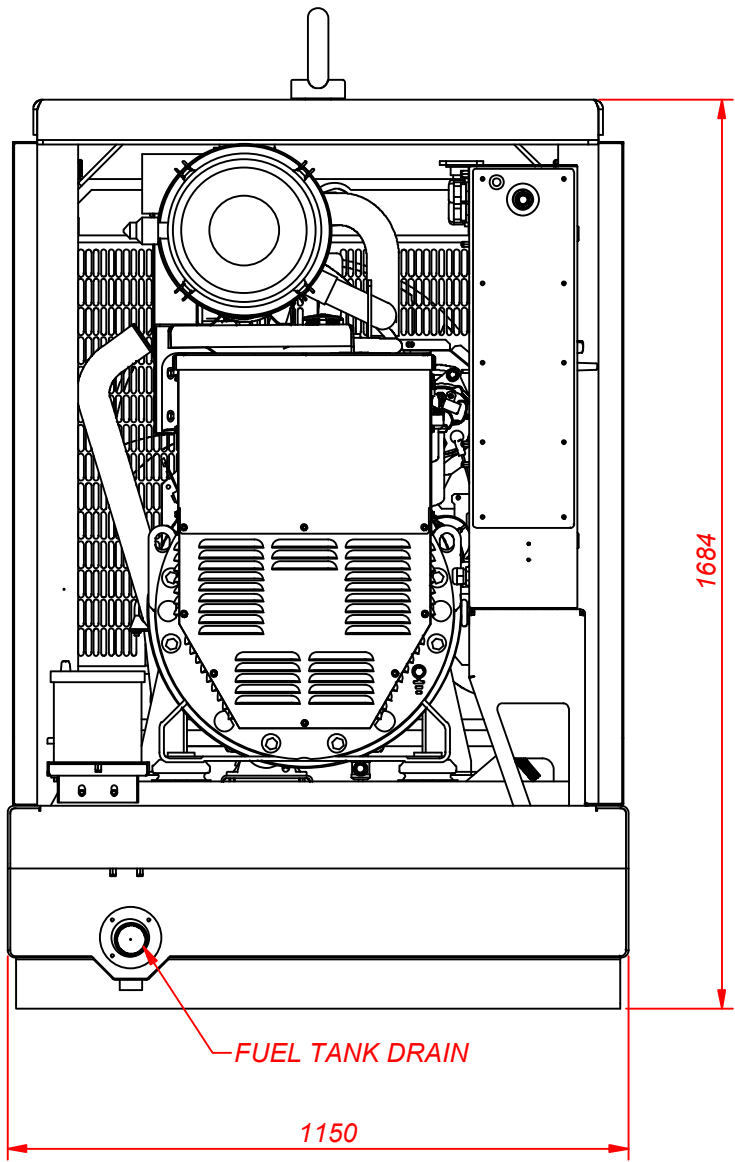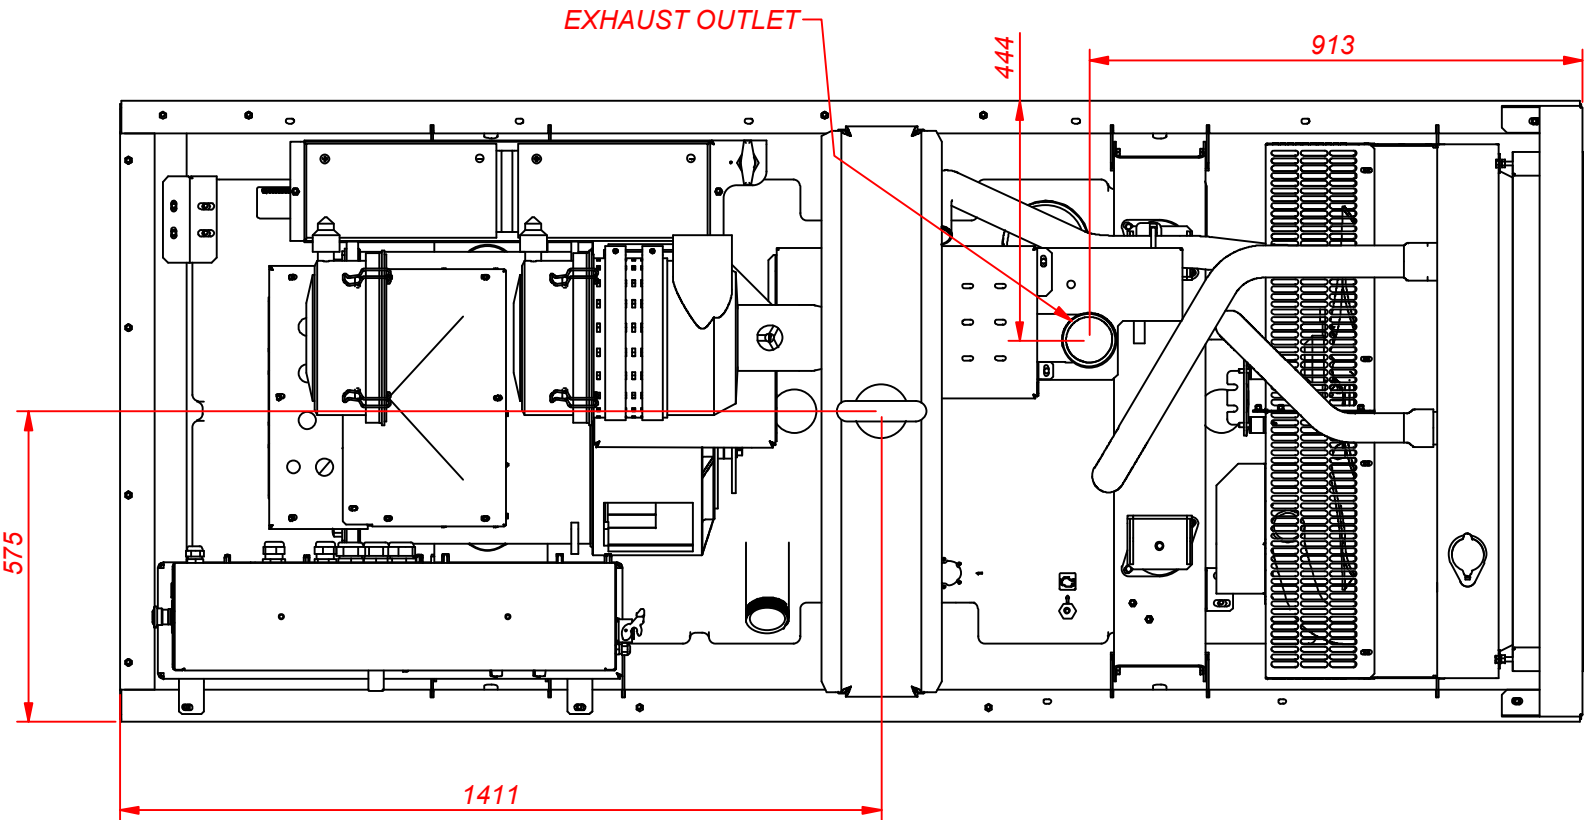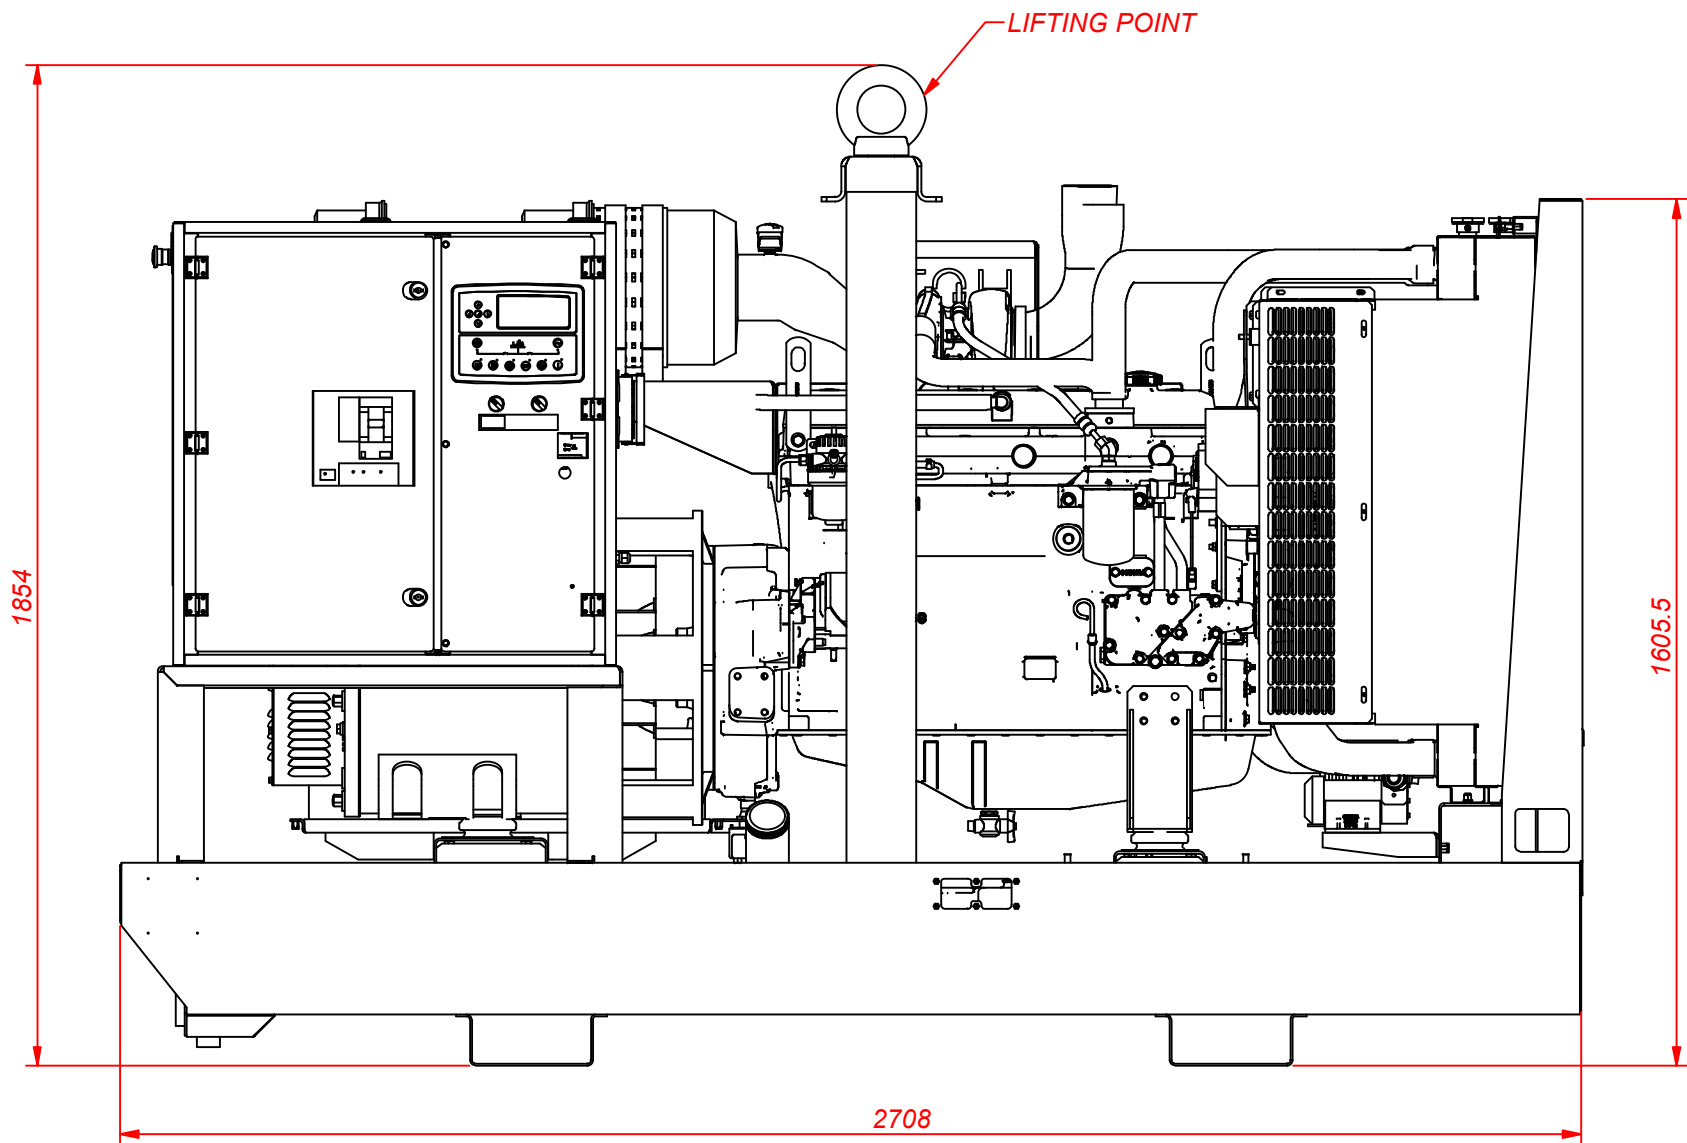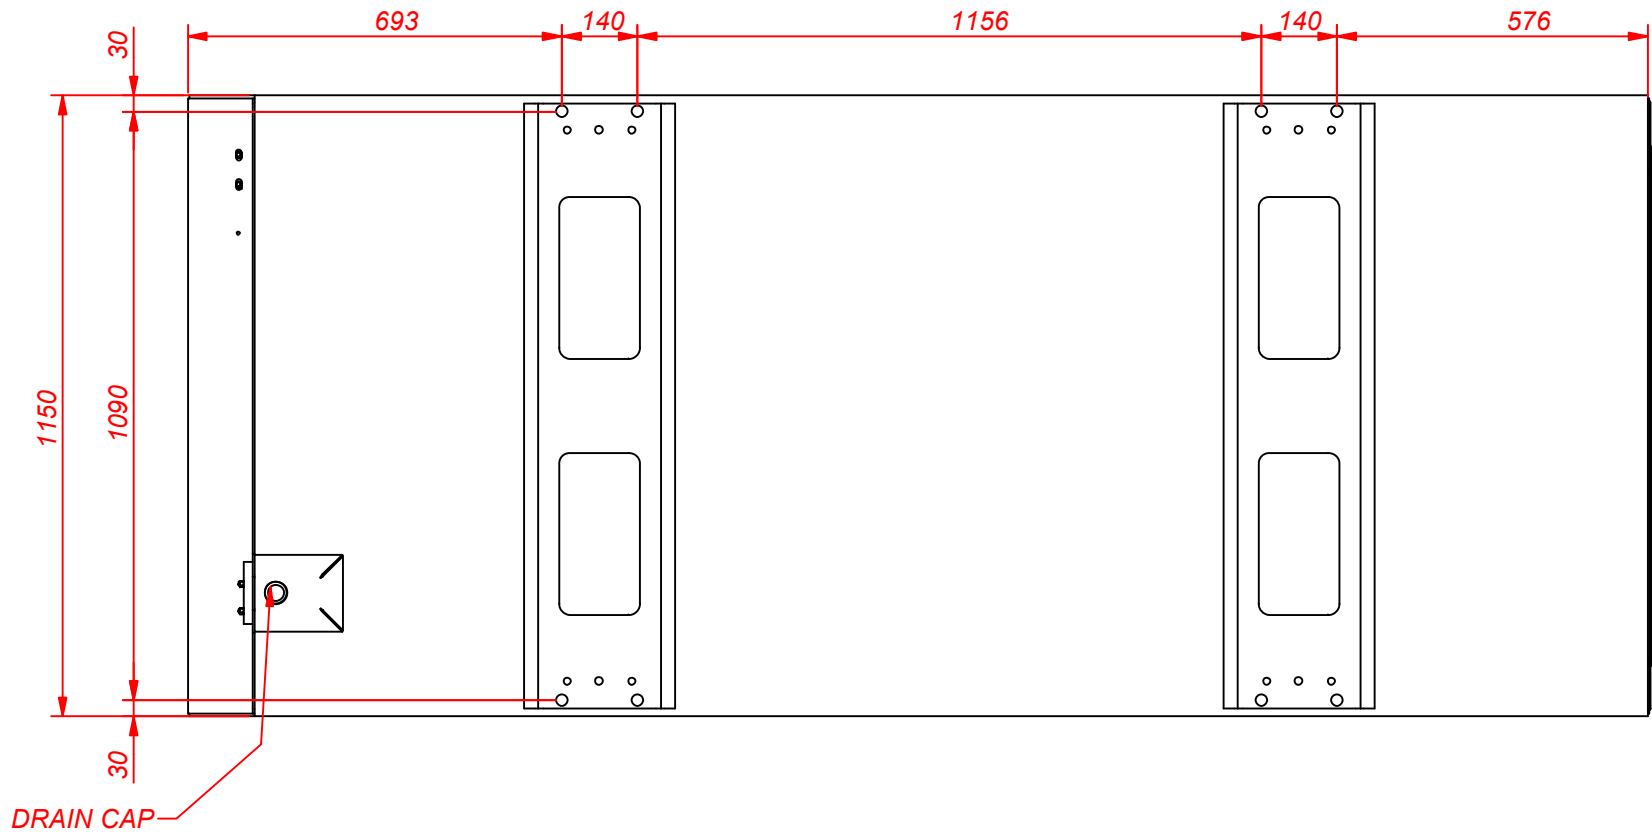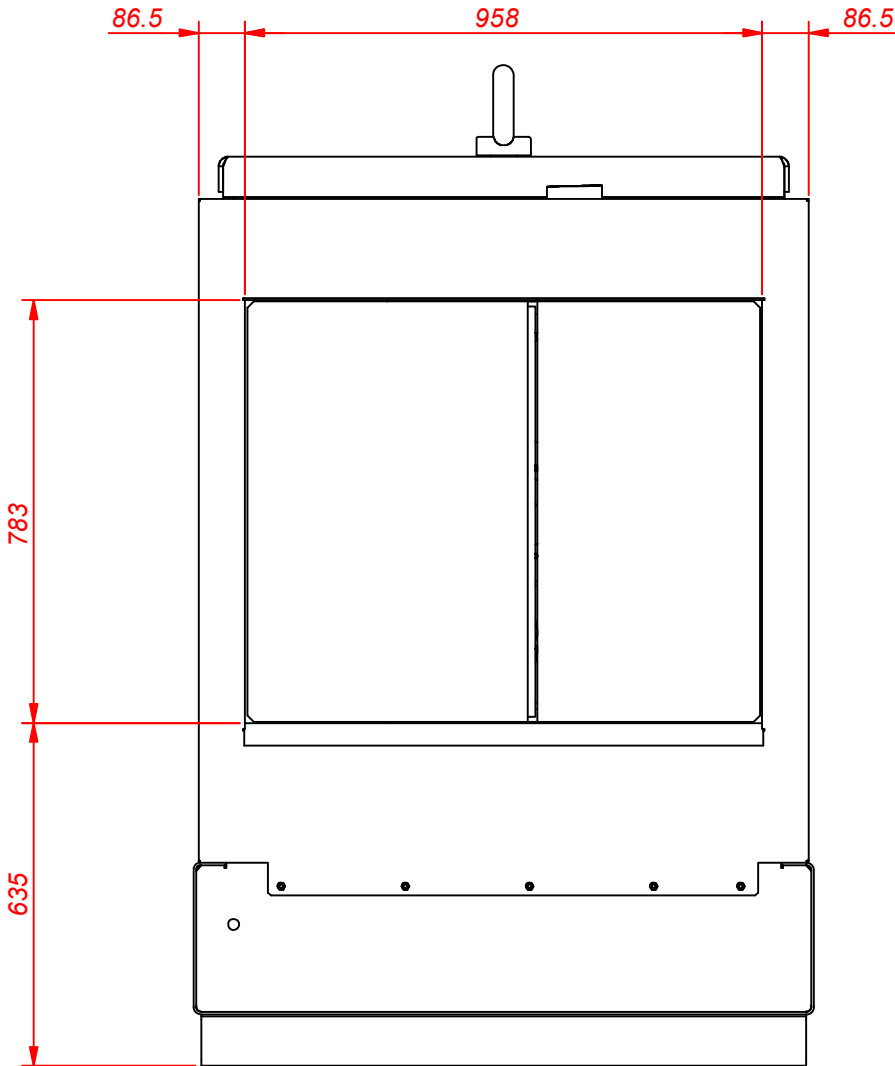

Tolerances, if not indicated, according to:									
Name					DIMENSION DRWG			QIS/CPSPG; CD	
Material								Confidentiality Class acc. to 1102 K	
Treatment								Confidential	
								Thickness: INV	
					Scale			A2 Compare	
					Drawn by esfh			Blank nr.	
					Version Drwg 00			Replaces	
					Blank wt. Kg			Finl wt. Kg	
					STATUS			Designation	
					Des checked.			Date 22/06/2016	
					Prod checked.			Approved.	
					Approved			1636011127	

1636011127	00
Parent 3D model	3D Model Edition



Drawing owner
ESF






Sheet 4 / 8

CONFIDENTIAL:

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

00				
Ed	Position	Modified from	Date	Intr./Appd.

6068HFG20

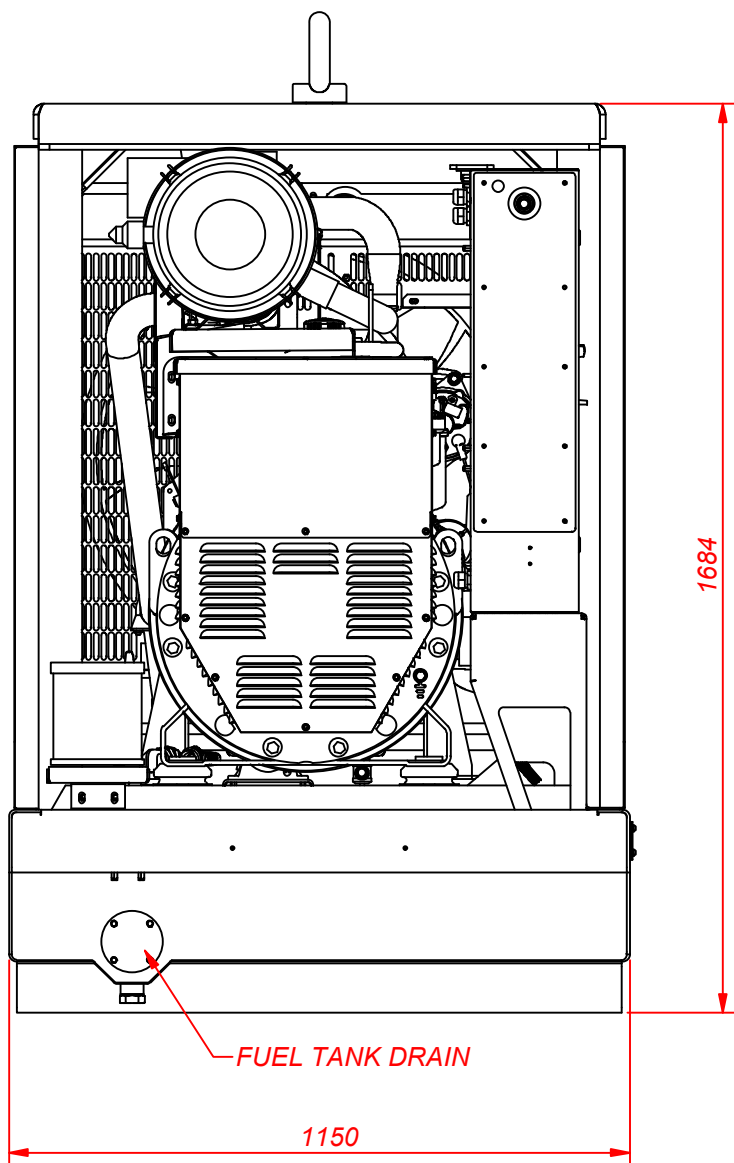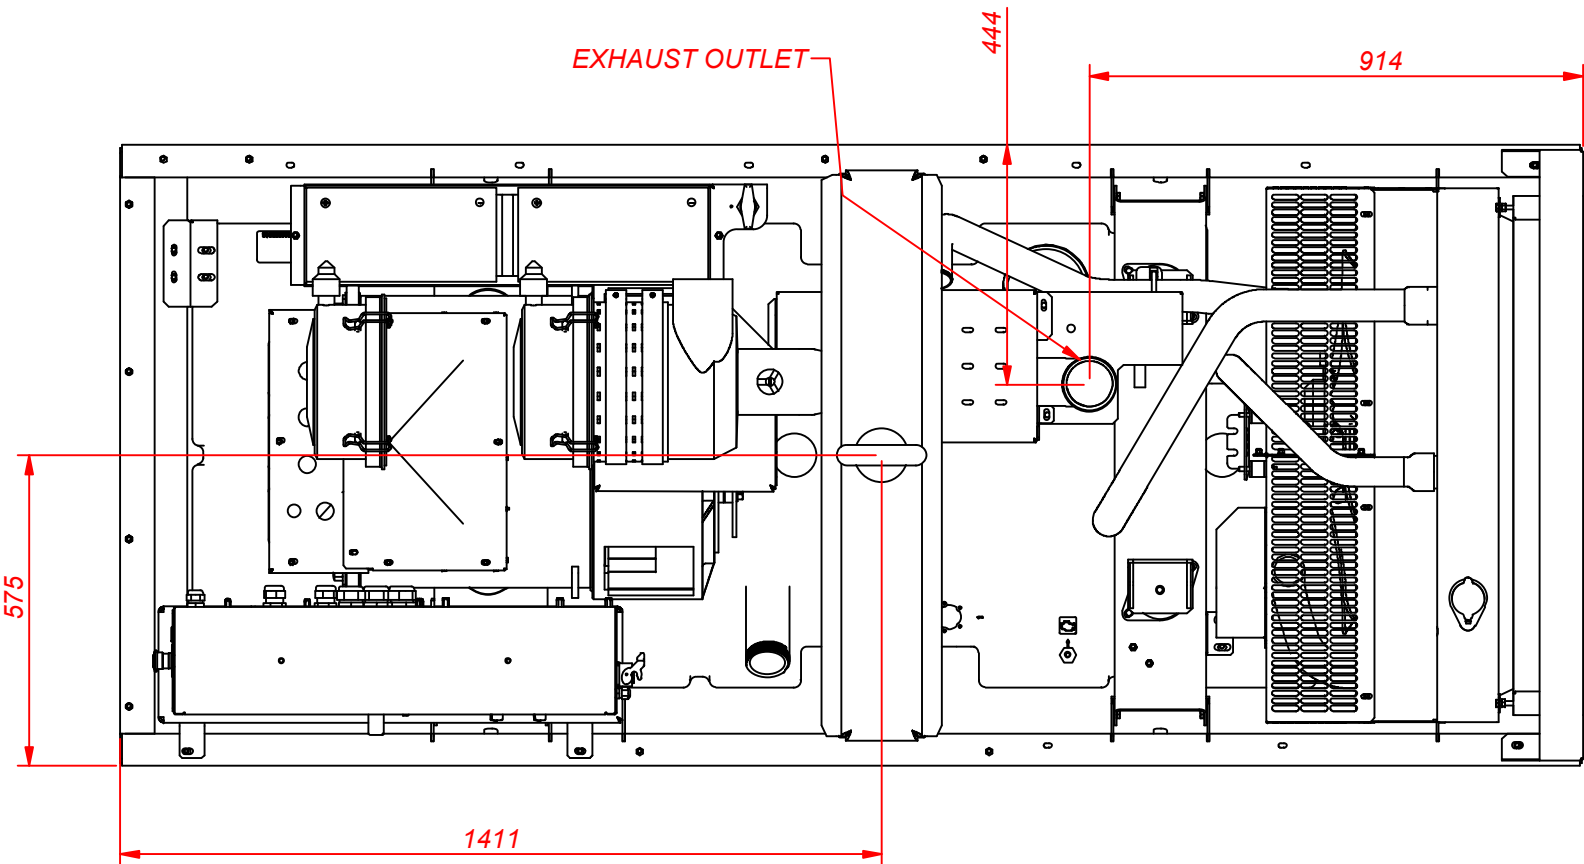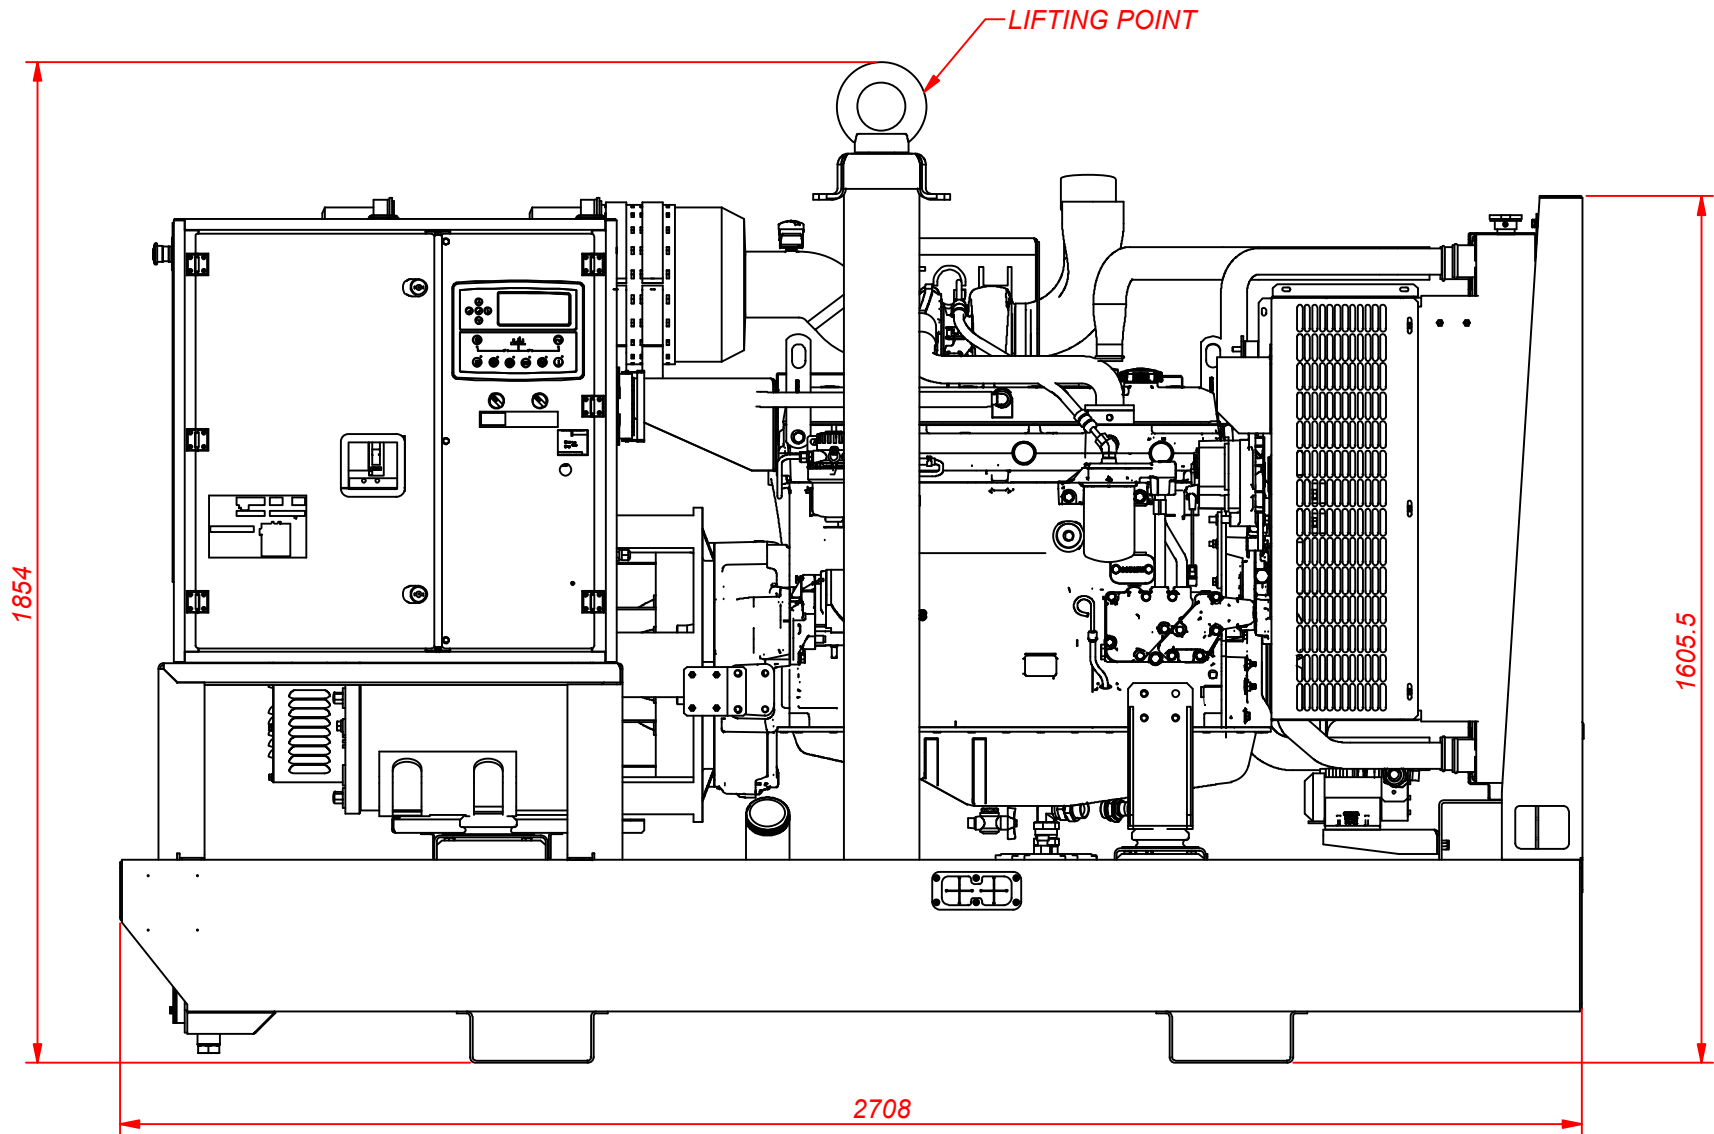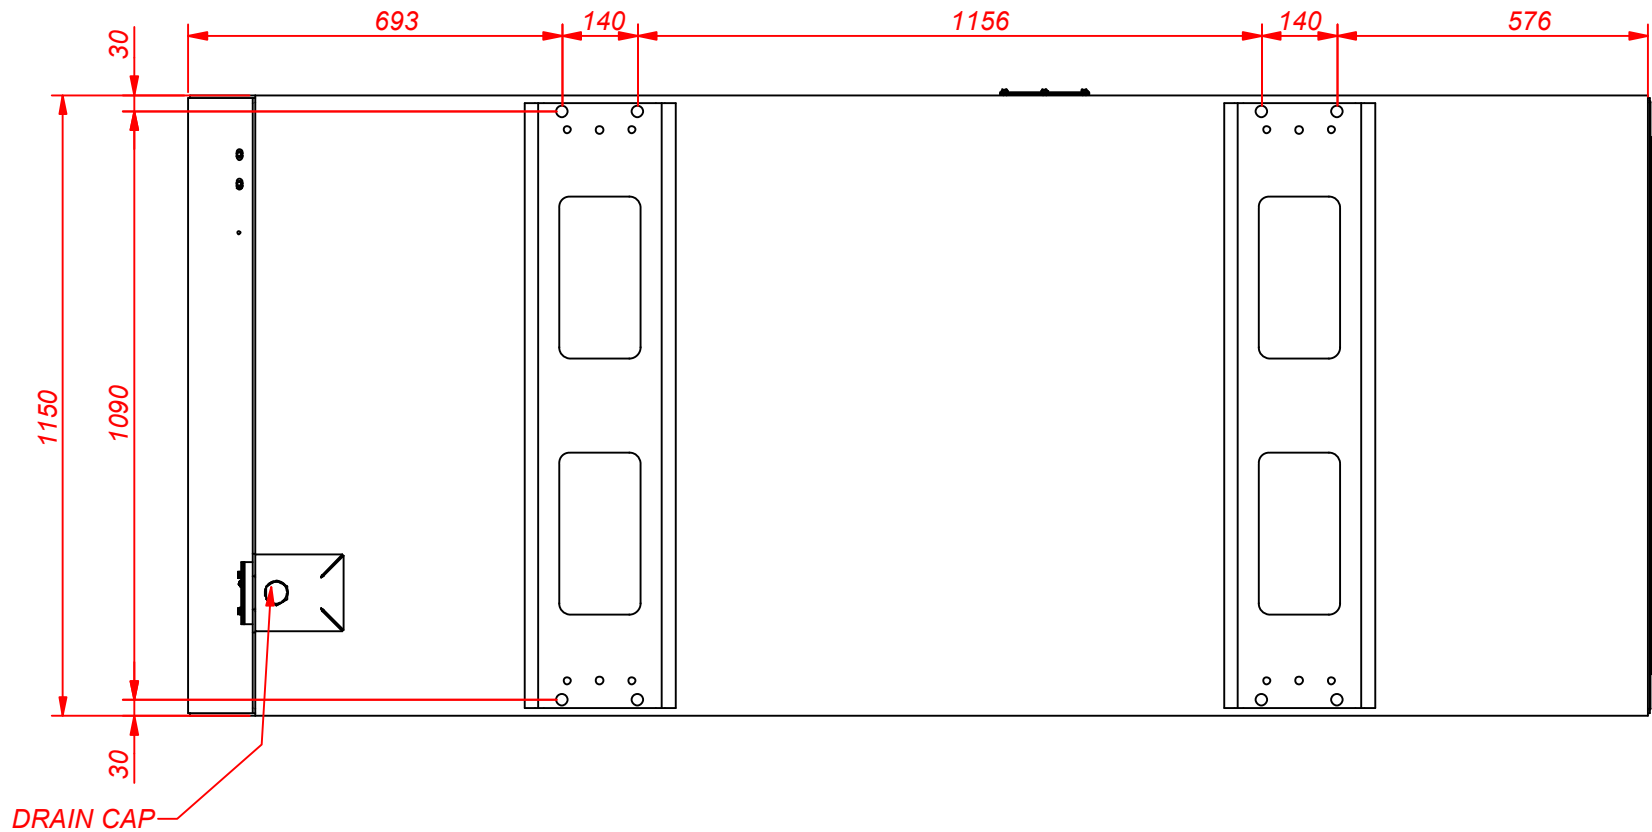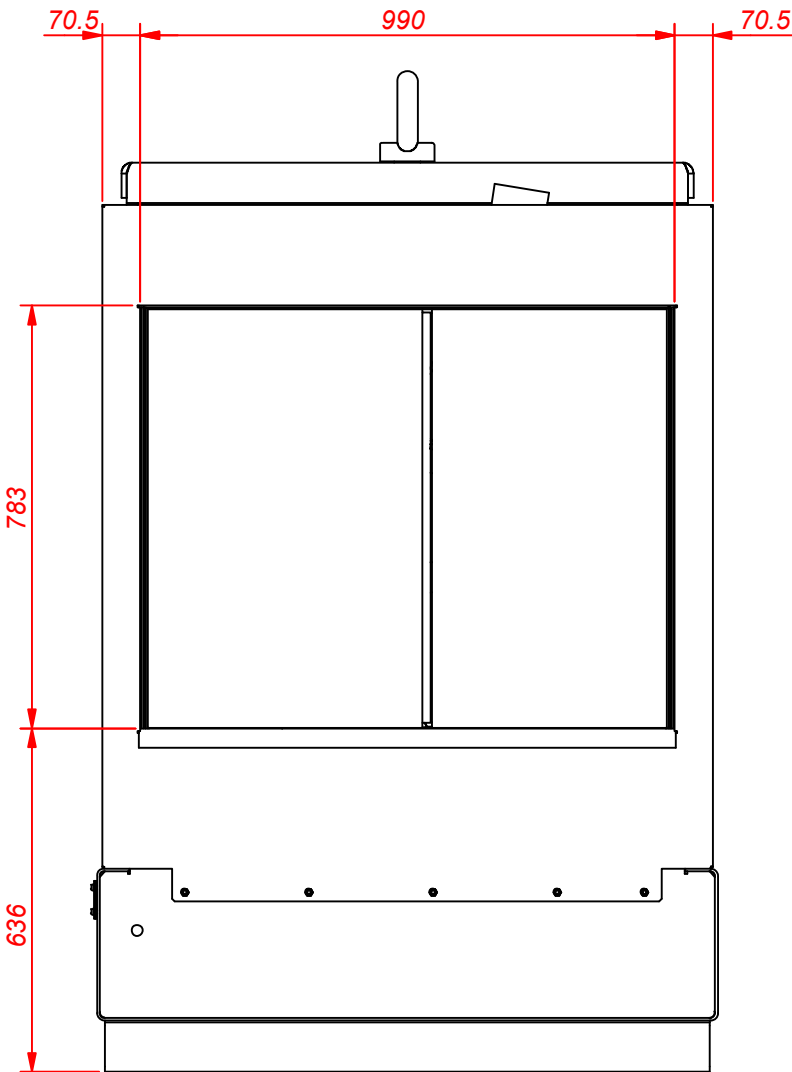






Tolerances, if not indicated, according to:									
Name					DIMENSION DRWG			QIS/CPSPG; CD	
Material								Confidentiality Class acc. to 1102 K	
Treatment								Confidential	
								Thickness:	INV
								A2 Compare	Drawing owner ESF
								Replaces	
					Version Drwg	Blank wt.	Finl wt.	Designation	Sheet 5 / 8
					00	Kg	Kg		
					Des checked.	Prod checked.	Approved.	Date	1636011127
								22/06/2016	



1636011127	00
Parent 3D model	3D Model Edition

CONFIDENTIAL:

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

6068TF220 24h

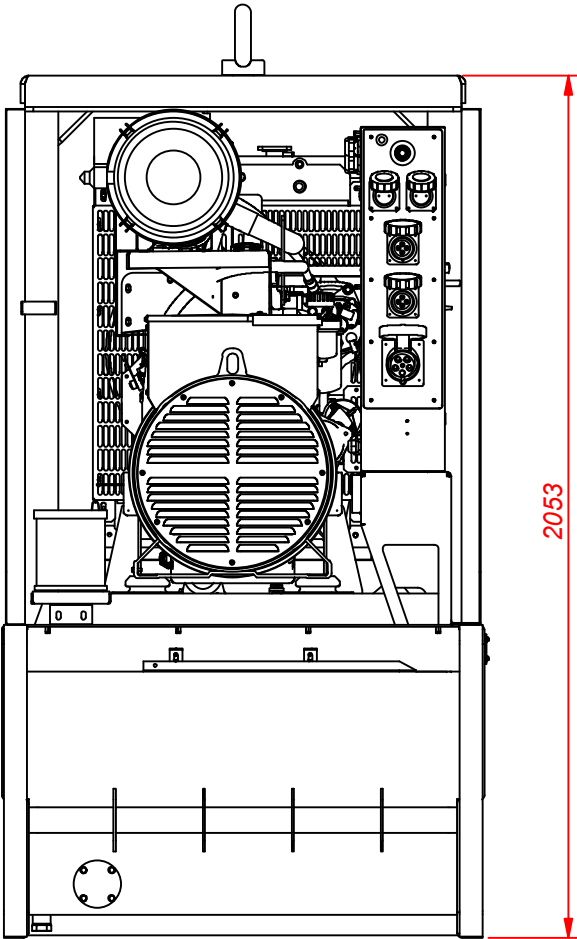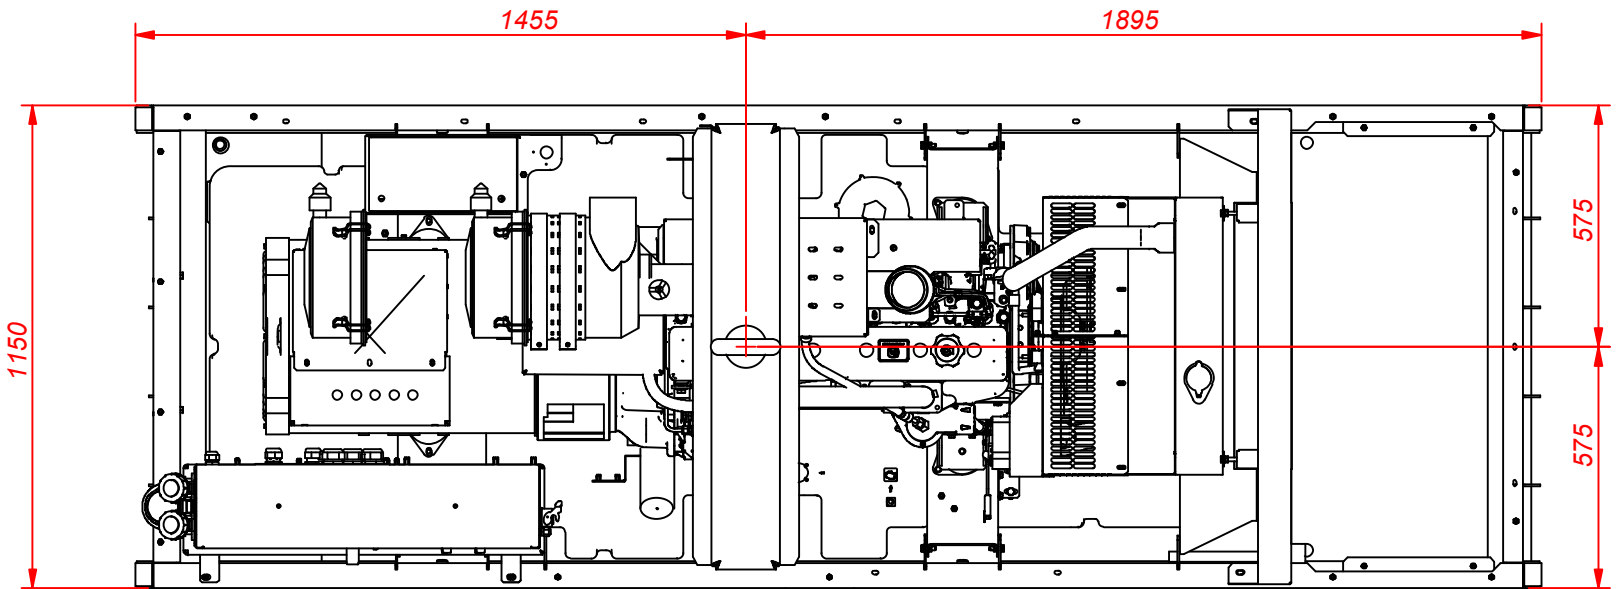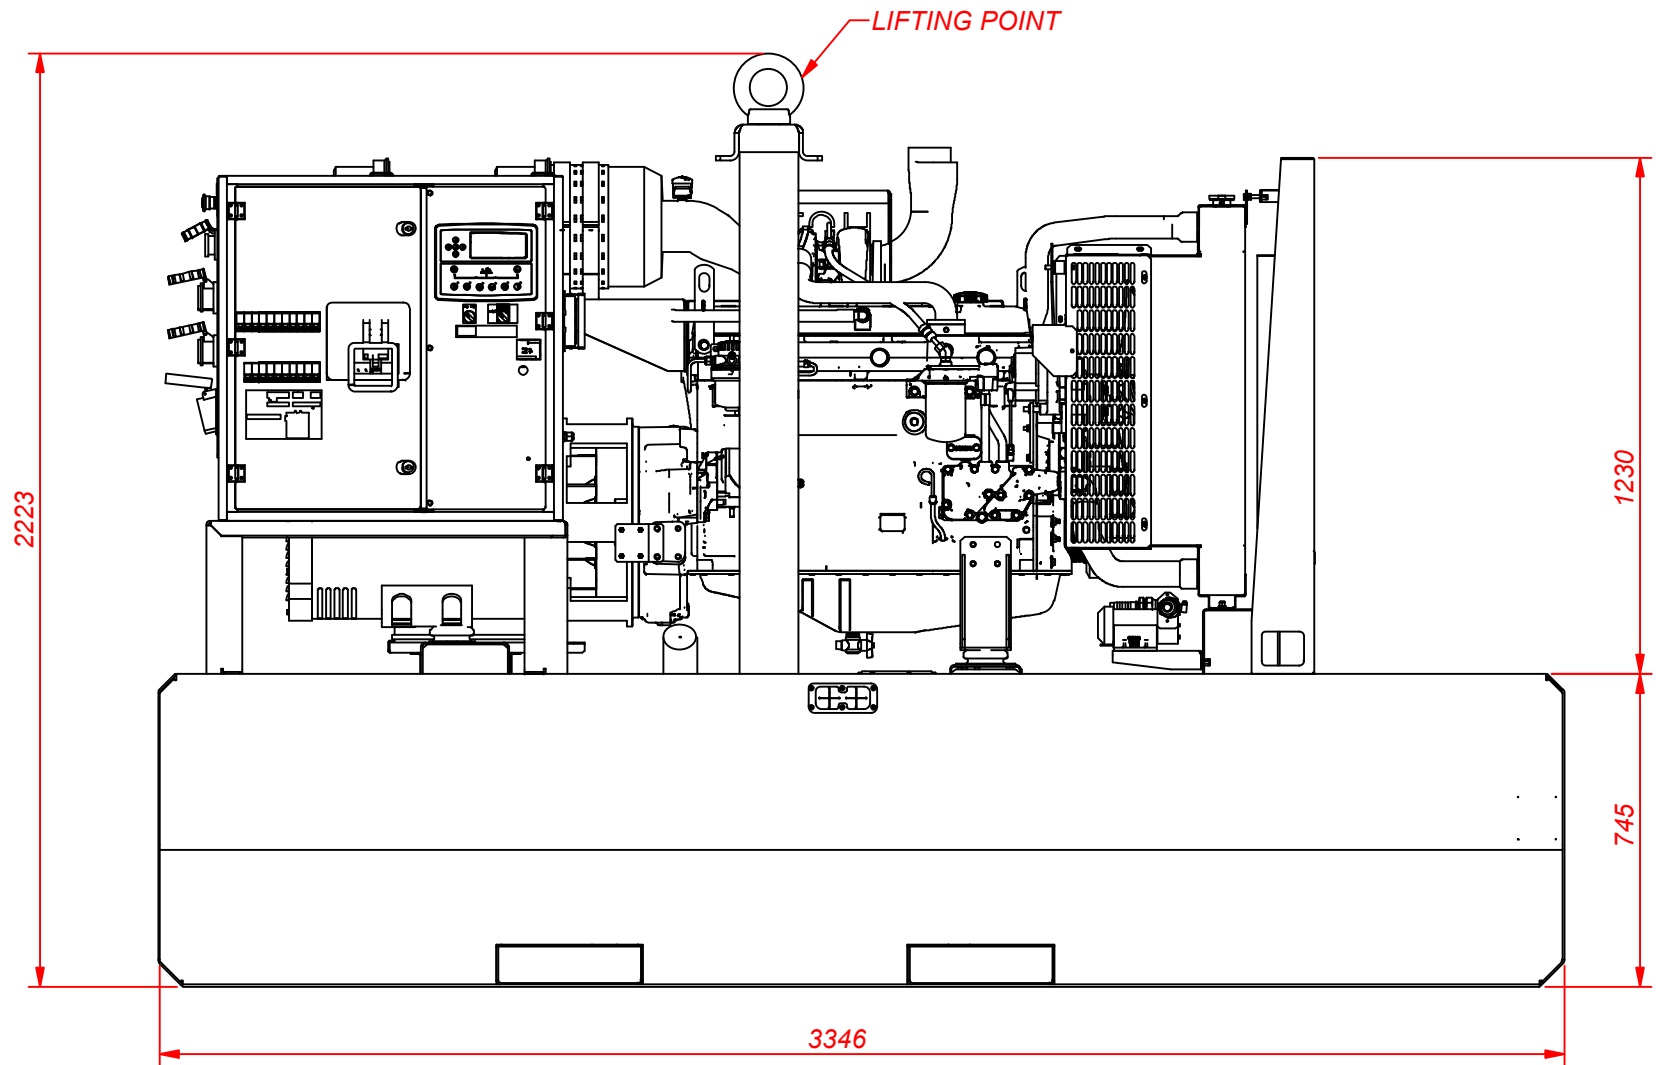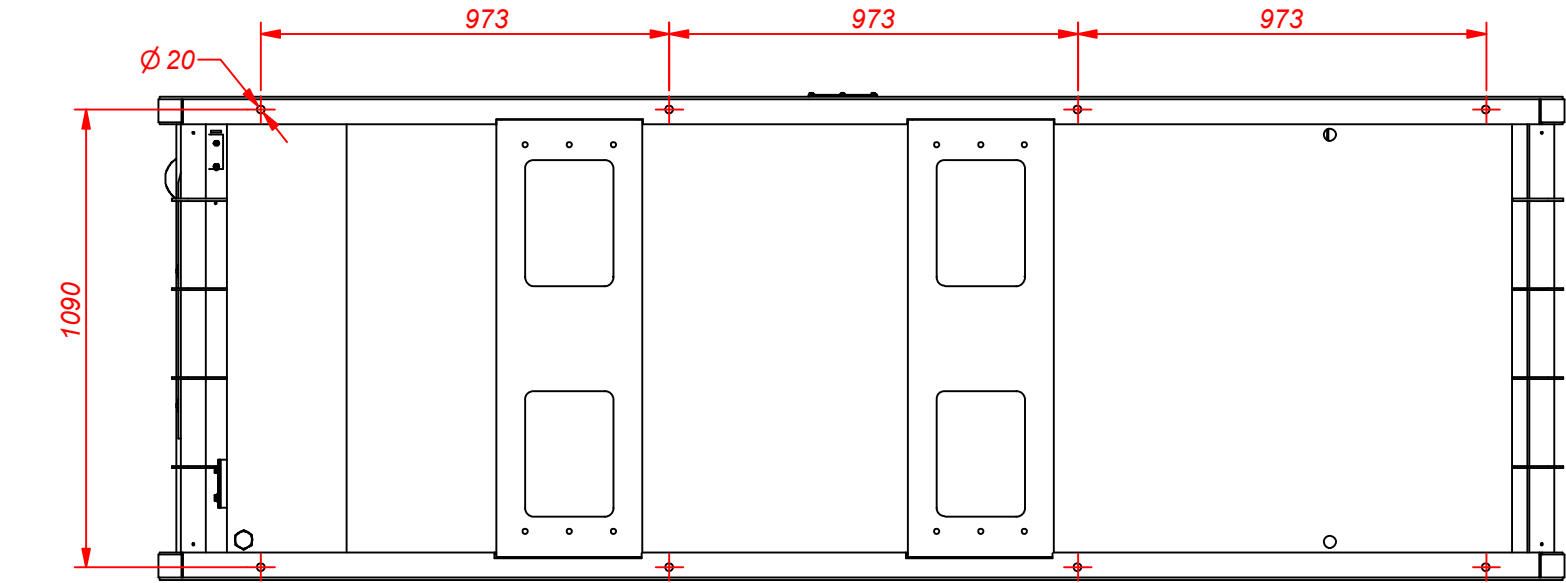
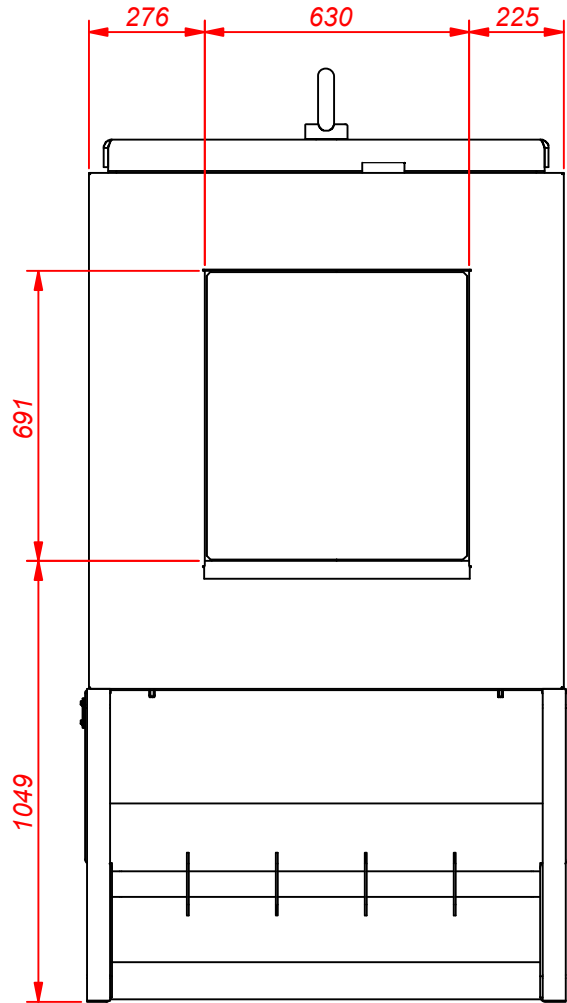


Tolerances, if not indicated, according to:																
Name										DIMENSION DRWG		QIS/CPSG; CD		Confidentiality Class acc. to 1102 K		
Material												Confidential				
Treatment										Thickness:		INV				
		Scale		Family		A2		Compare		Drawing owner						
		Drawn by estfh		Blank nr.				Replaces		ESF						
		Version Drwg 00		Blank wt. Kg		Finl wt. Kg		Designation		Sheet 6 / 8						
Approved		Des checked.		Prod checked.		Approved.		Date 22/06/2016		1636011127						

CONFIDENTIAL:

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

6068HF120 24h

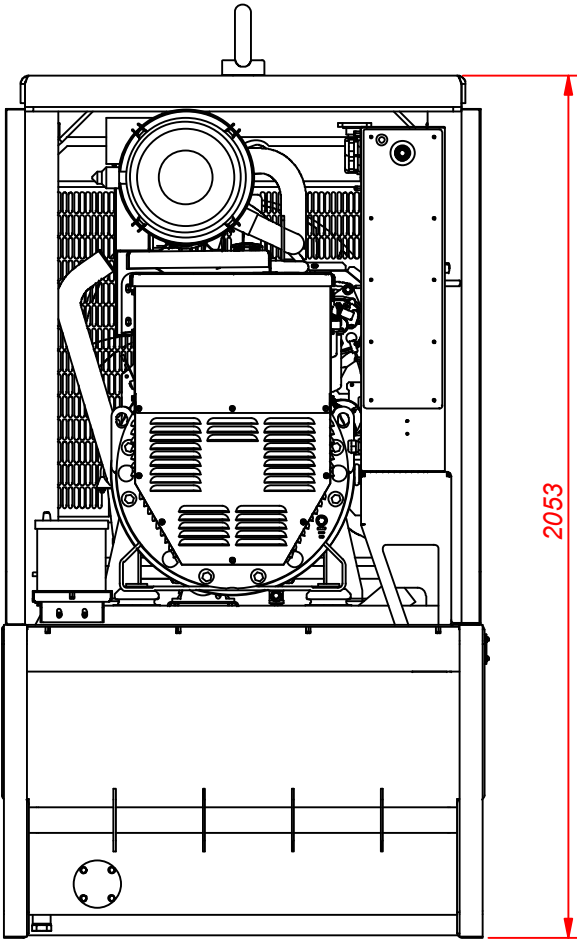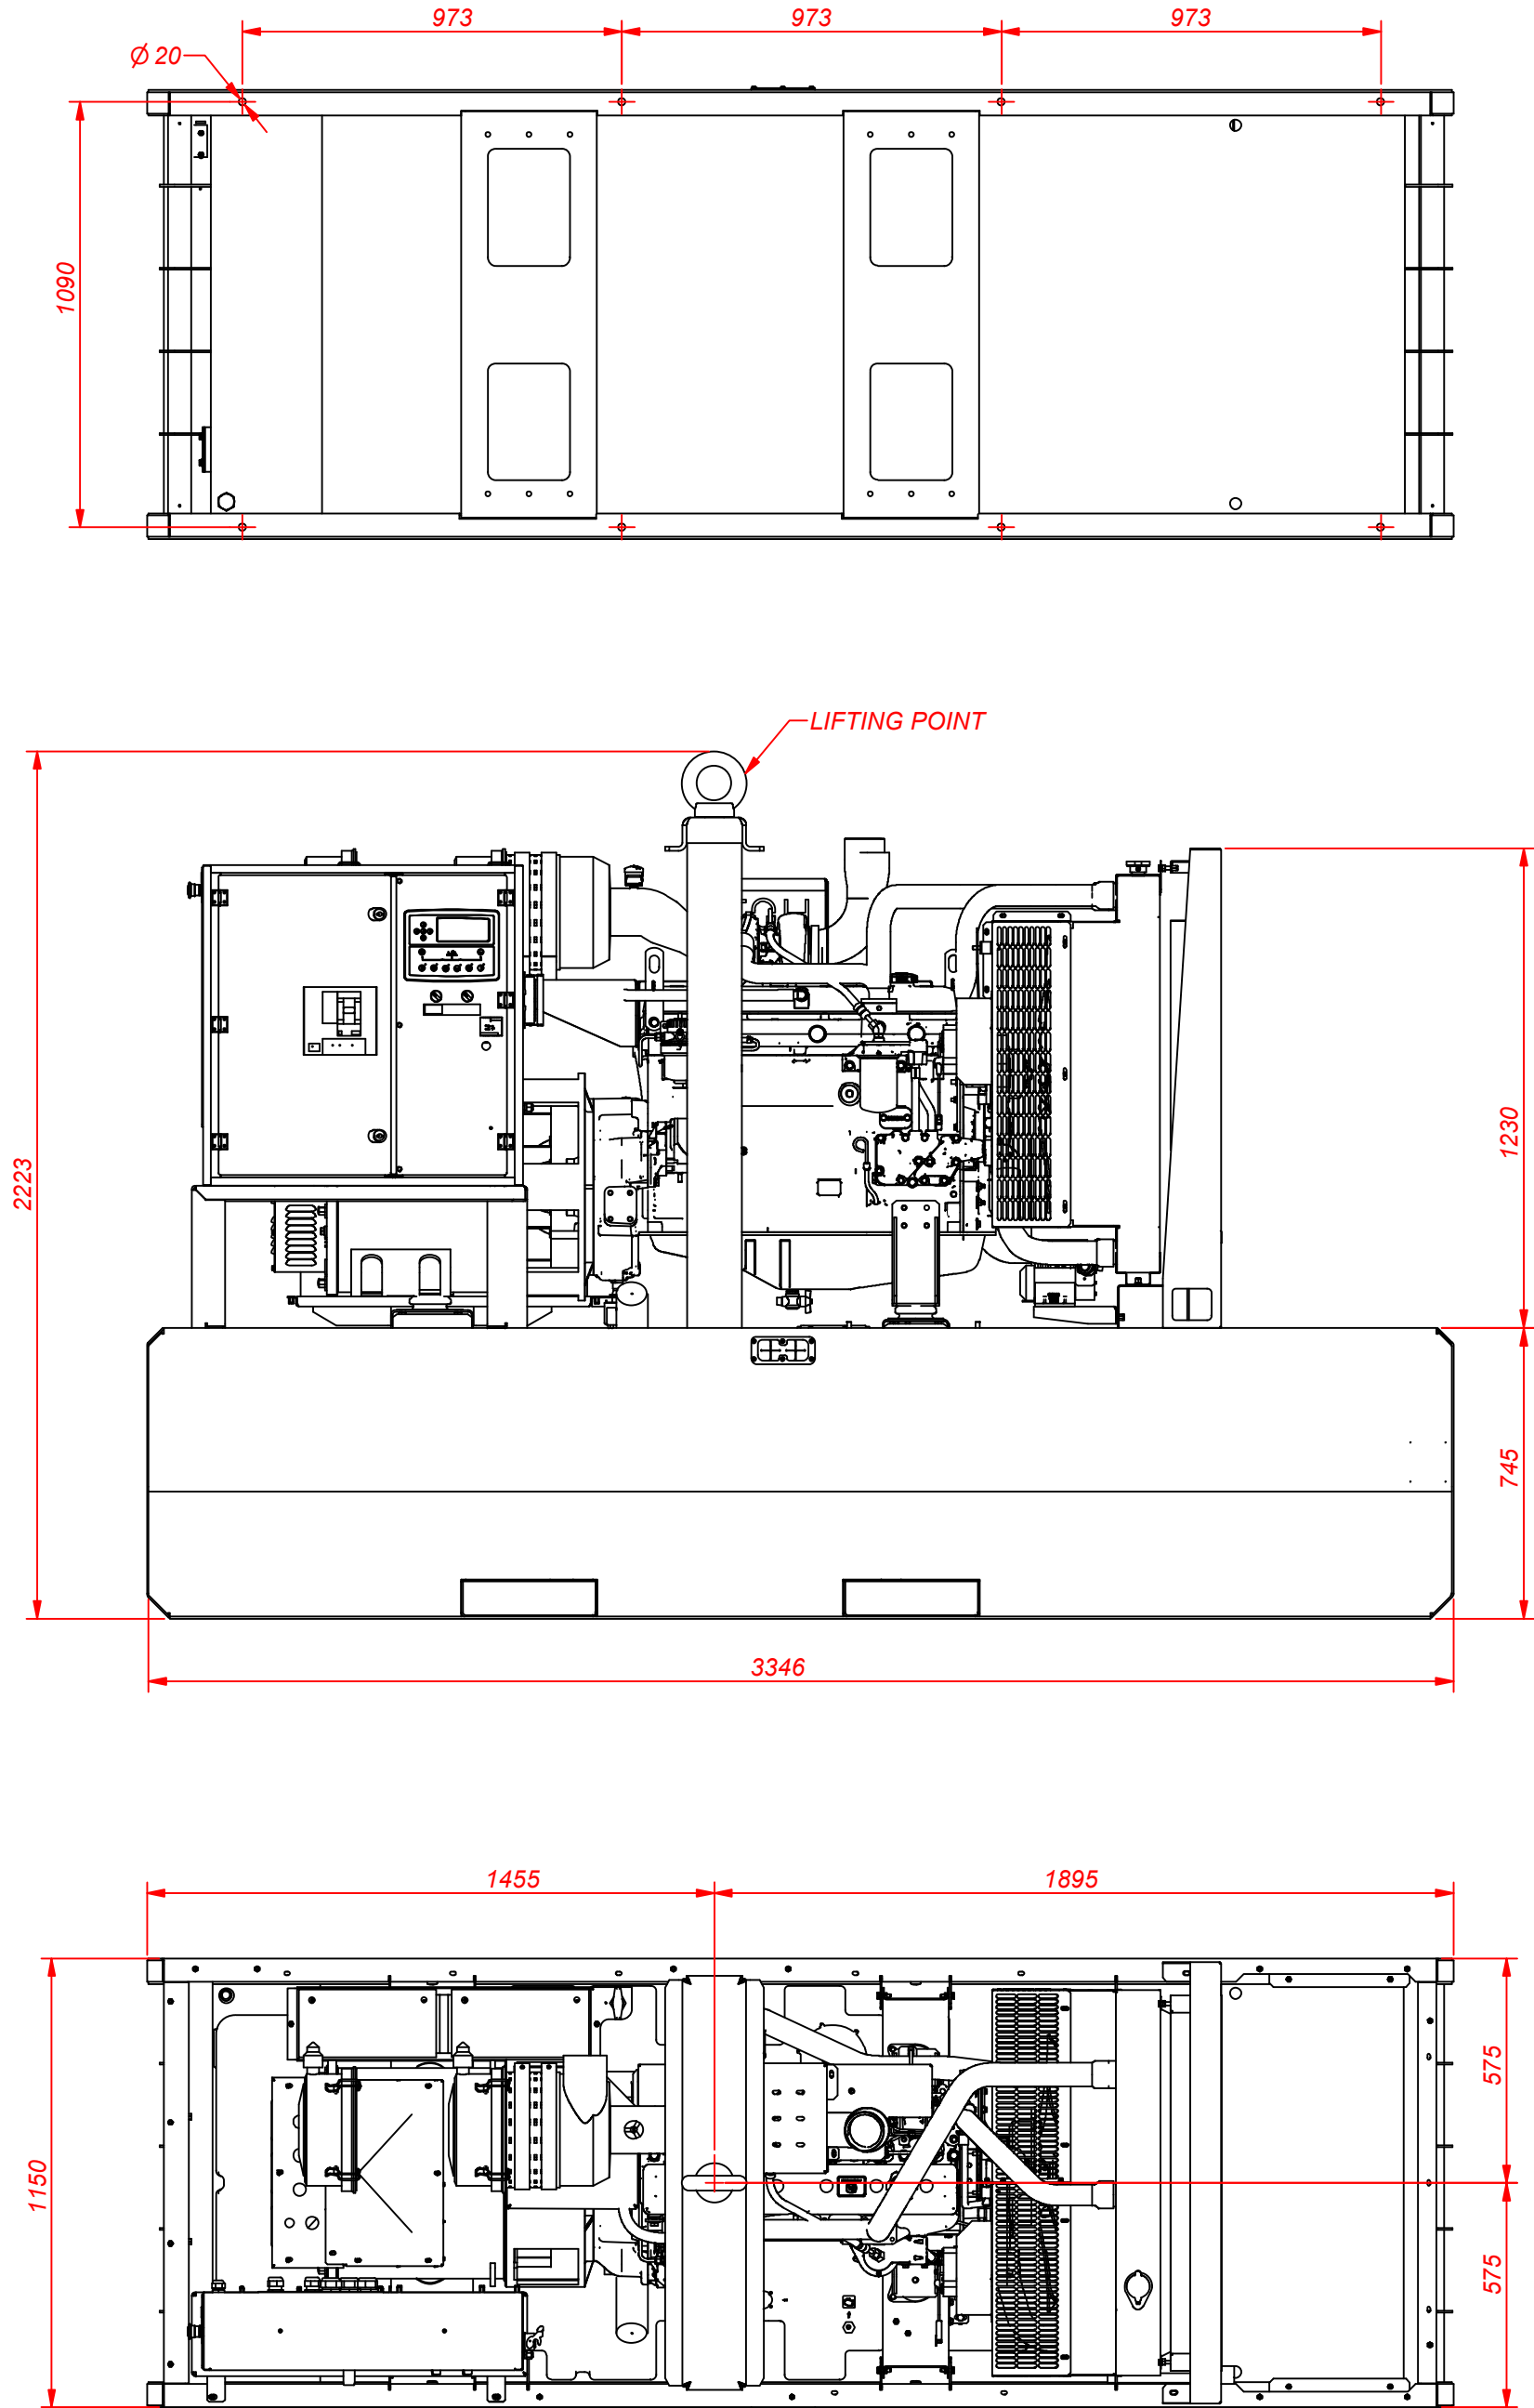

Tolerances, if not indicated, according to:												
Name		DIMENSION DRWG					QIS/CPSG; CD		Confidentiality Class acc. to 1102 K			
Material										Confidential		
Treatment										Thickness: INV		
		Scale		Family		A2		Compare		Drawing owner		
		Drawn by esfh		Blank nr.				Replaces		ESF		
STATUS		Version Drwg 00		Blank wt. Kg		Fin. wt. Kg		Designation		Sheet 7 / 8		
Approved		Des checked.		Prod checked.		Approved.		Date 22/06/2016		1636011127		

00				
Ed	Position	Modified from	Date	Intr./Appd.






1636011127	00
Parent 3D model	3D Model Edition



Drawing owner
ESF

CONFIDENTIAL:

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

6068HFG20 24h

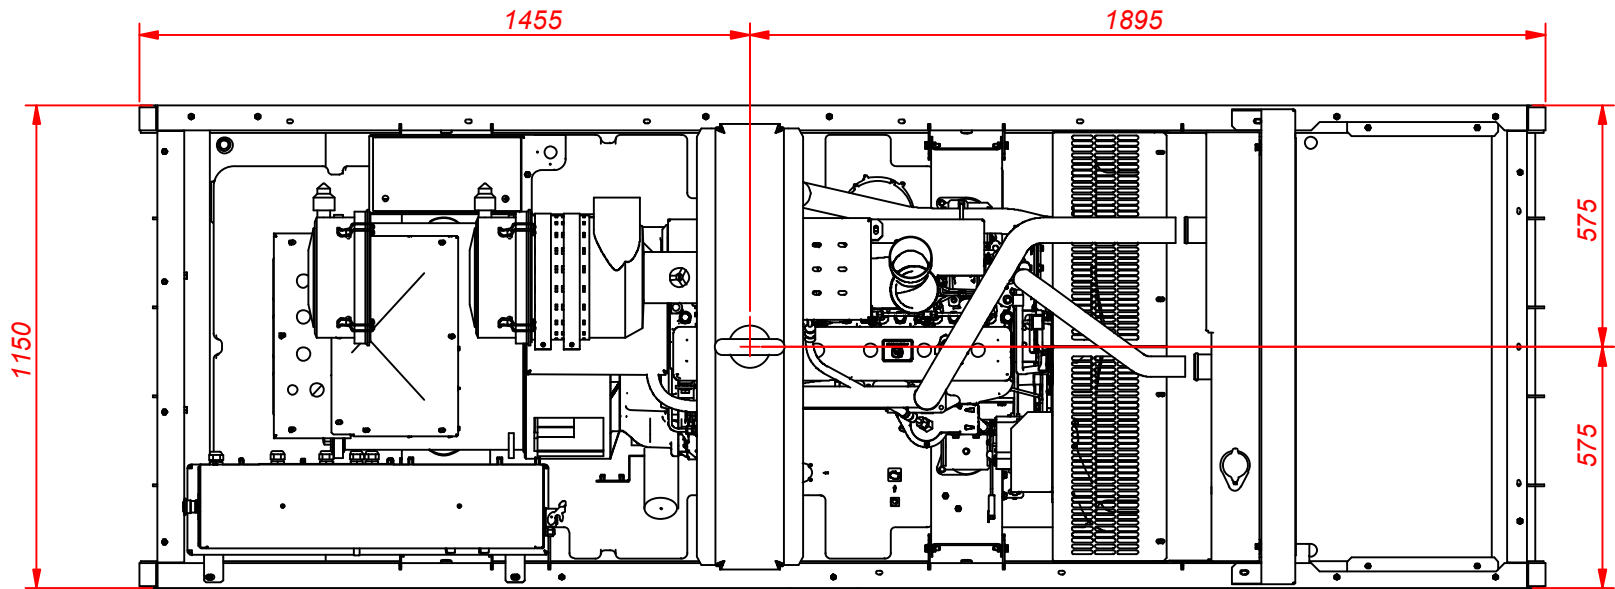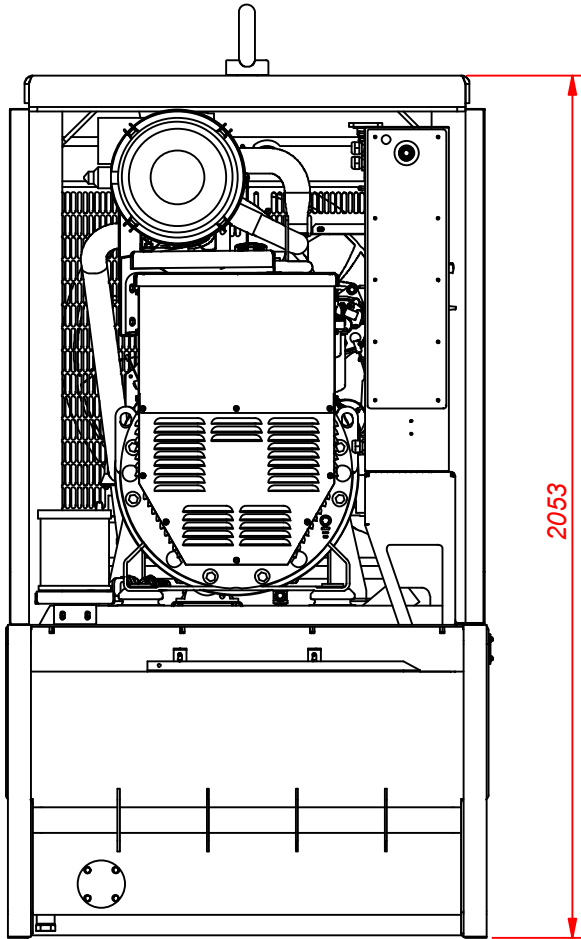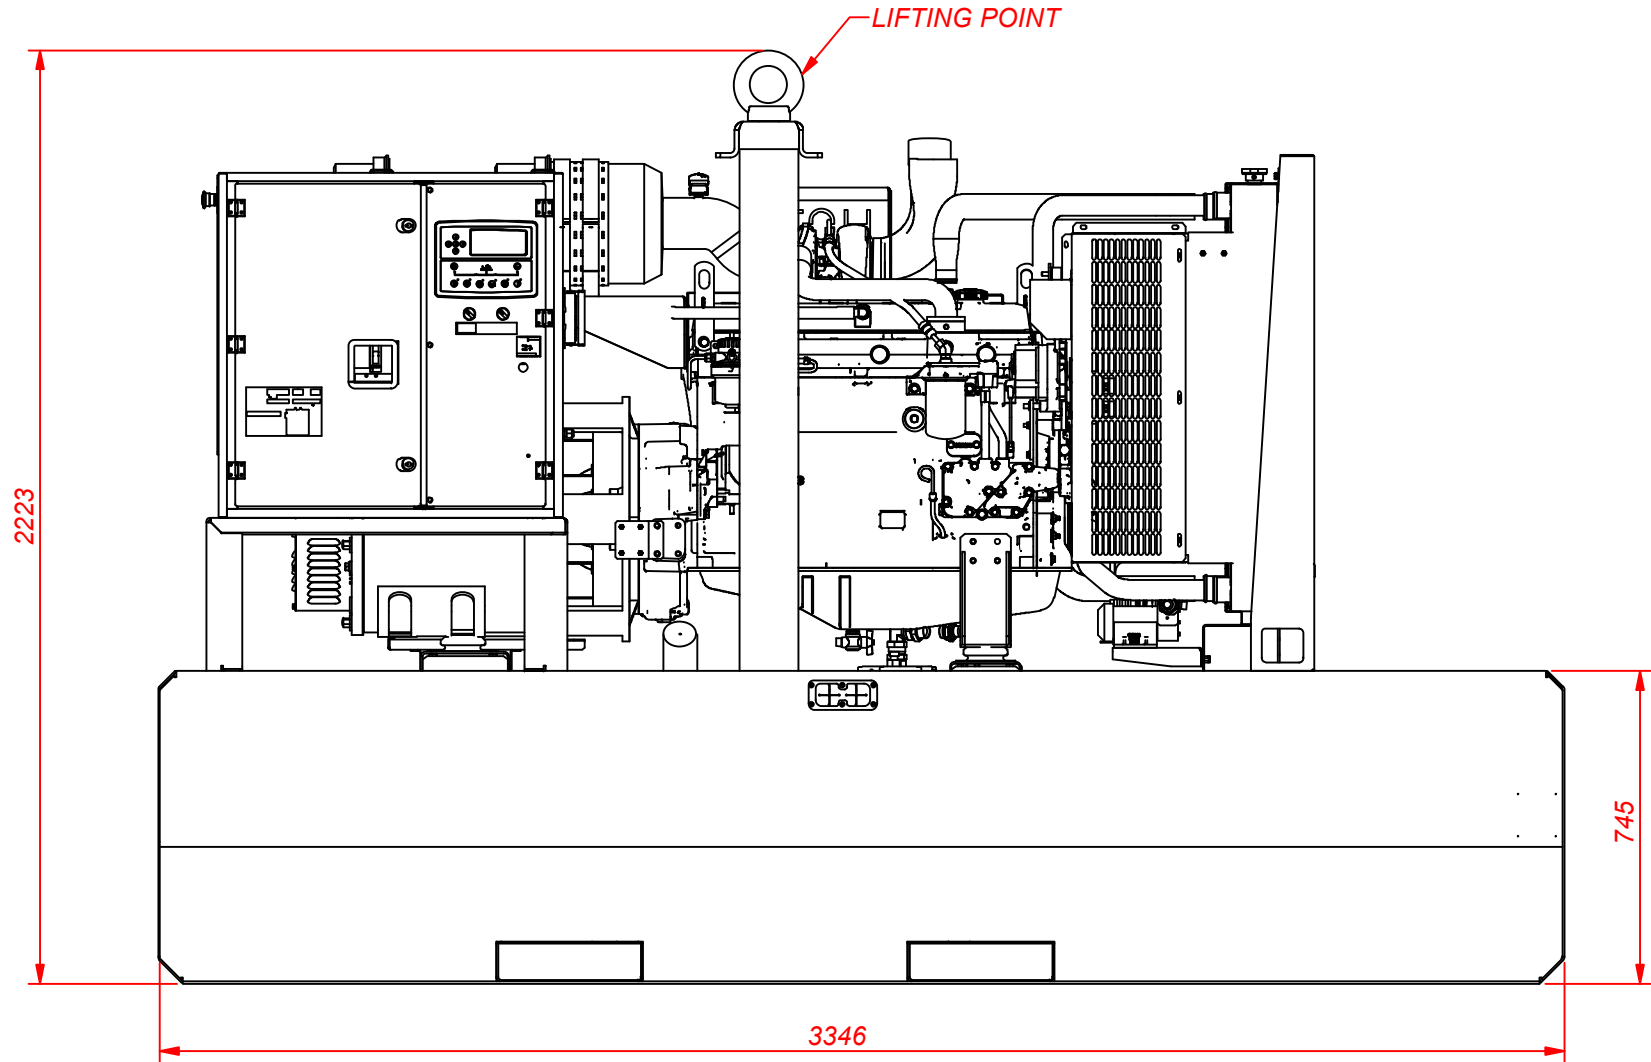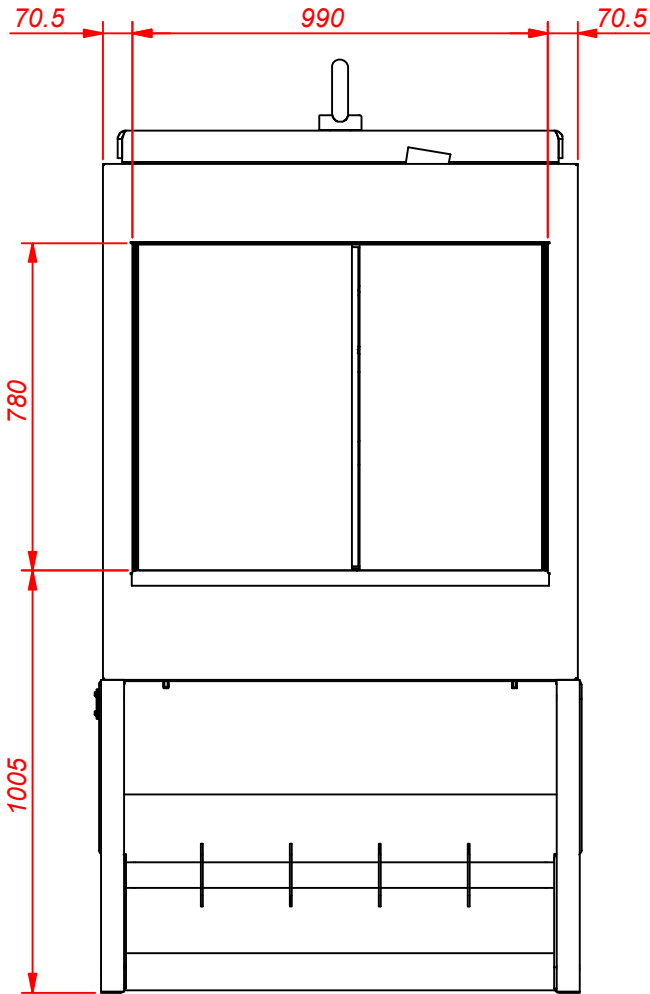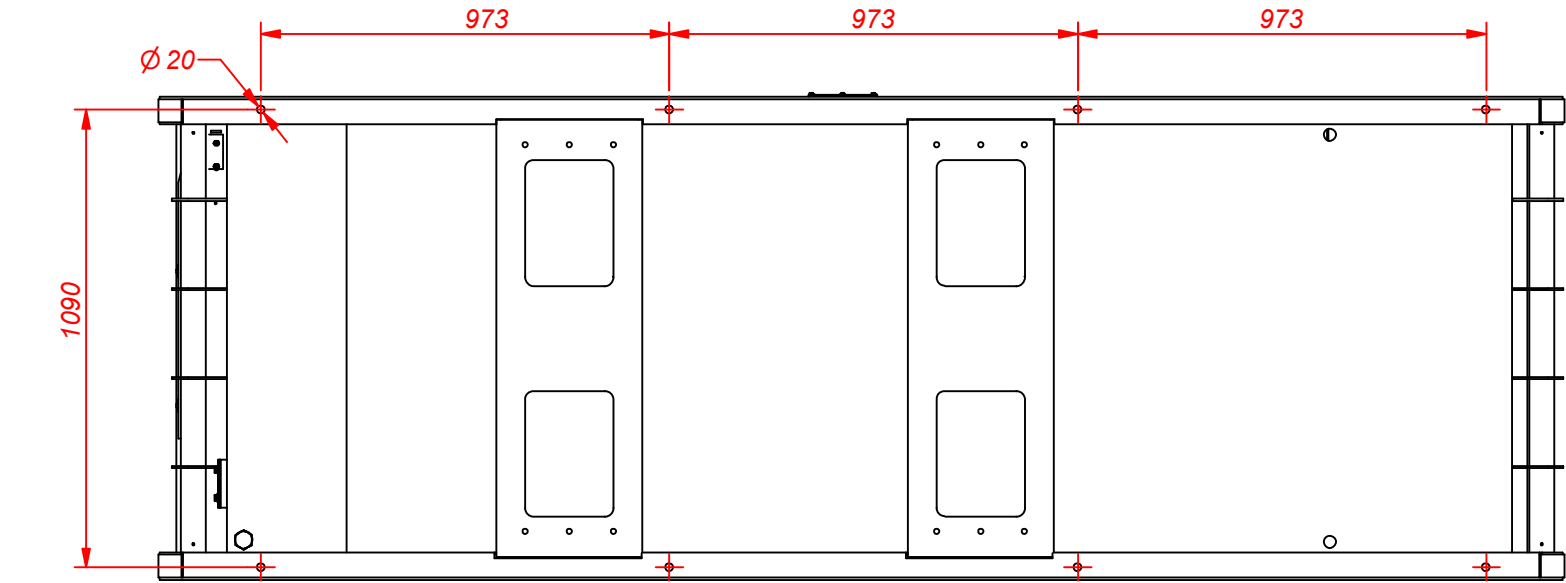

Tolerances, if not indicated, according to:												
Name		DIMENSION DRWG					QIS/CPSG; CD		Confidentiality Class acc. to 1102 K			
Material										Confidential		
Treatment										Thickness: INV		
		Scale		Family		A2		Compare		Drawing owner ESF		
		Drawn by esfh		Blank nr.				Replaces				
STATUS		Version Drwg 00		Blank wt. Kg		Finl wt. Kg		Designation		Sheet 8 / 8		
Approved		Des checked.		Prod checked.		Approved.		Date 22/06/2016		1636011127		

00				
Ed	Position	Modified from	Date	Intr./Appd.

1636011127	00
Parent 3D model	3D Model Edition