


Dali PWM Dimmer 1-Channel 2G

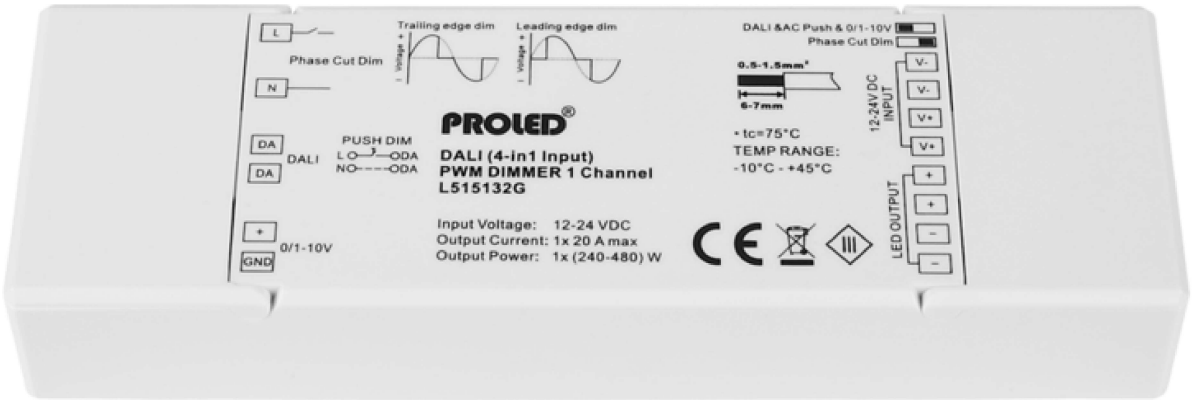

1 channel LED dimmer with 4-in-1 input. Digitally controllable and addressable with a DALI interface. The control can be also via a 100 k Ω potentiometer, 1–10 V control voltage source, with a push button (PUSH-DIM function) or phase-cut dimmer (leading edge + trailing edge). The output voltage corresponds to the supply voltage of 12–48 V.

PROLED DALI (4-IN-1 INPUT) PWM DIMMER 1-CHANNEL MANUAL (4.6 MB)
5 YEARS WARRANTY INFORMATION

TECHNICAL DATA

Power Range	12–48 VDC
-------------	-----------

Output	to 24 VDC: 20 A (2x 10 A) 48 VDC: 10 A (2x 5 A)
Number of control inputs	1
Control signal	DALI or 1–10 V, 100 k Ω potentiometer, PUSH-DIM, phase-cut dimmer / leading edge + trailing edge (minimum load 4 W)
Output channels	1
Output voltage	12–48 VDC
Operating temperature range	-10° C till +45° C
Dimensions (l x w x h)	170 x 54 x 28 mm
Weight	0,12 kg

PRODUCT TYPES

order code	description
L515132G	DALI PWM DIMMER 1-CHANNEL 2G

MEMBER OF THE PROLED GROUP