

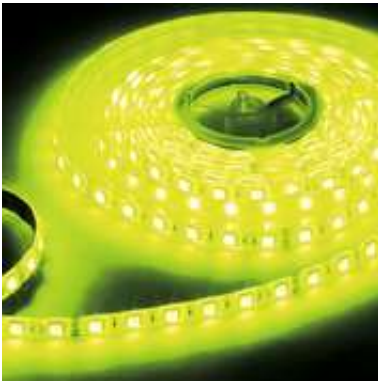


**PROLED®**


## Flex Strip IP53 HD RGB

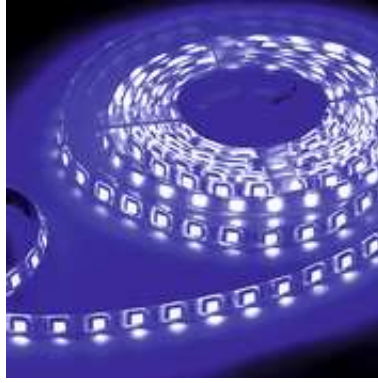

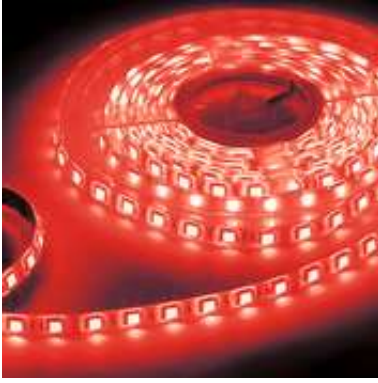

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities.

- 3 colours in one LED, therefore 100% smooth colour mixing.
- High flexibility – adaptable to round shapes.
- Installation with 3M adhesive tape on the strip's backside (self adhesive).
- IP53 only if glued correctly and if the sides are sealed with glue.
- dimmable, autom. colour change, controllable via DMX 512, DALI, KNX, 1-10 V, CASAMBI, RF by MULTI power supplies/controller

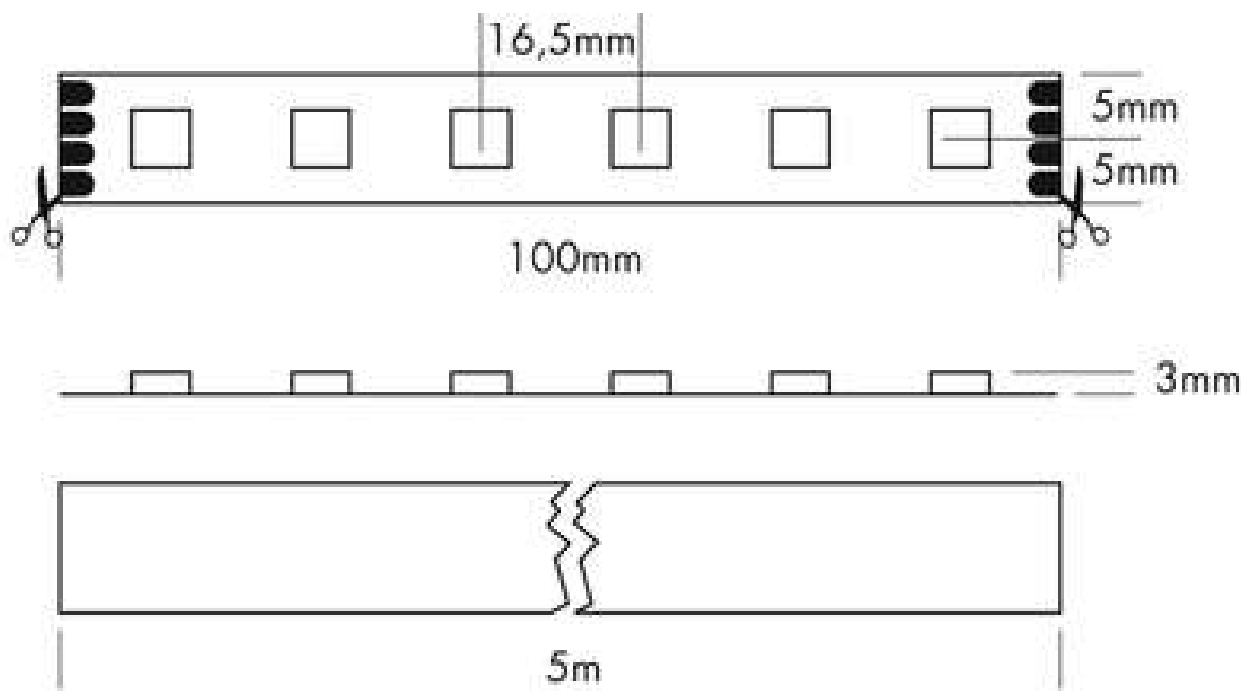

[PROLED FLEX STRIP IP20+IP53+IP68 MANUAL \(1.3 MB\)](#)

[EULUMDAT/IES INFORMATION](#)

[ORDER EXAMPLE SPECIAL LENGTHS](#)

[5 YEARS WARRANTY INFORMATION](#)

["UL-LISTED" INFORMATION](#)

## TECHNICAL DATA

IP classification	IP53
Power source	24 VDC Common Anode (CA)
Electrical connection	2x cable with 4-PIN to open wires
Maximum quantity per power input	5 m
Average lifetime*	50.000 h at L80/B10
Operating temperature range	-10° C till +45° C
Width x height	10 x 3 mm
min. Bending radius	20 mm
Cuttable	all 6 LEDs (10 cm)

## PHOTOMETRIC DATA

LED type	SMD RGB 3-in-1 LEDs
Luminous flux	red 140 Lumen per m green 380 Lumen per m blue 90 Lumen per m r+g+b (white) 610 Lumen per m
Wave length	red 620 nm green 525 nm blue 470 nm
Beam angle	120°

Due to conditions of production photometric data can vary from production batch to production batch within the EU directive.

## PRODUCT TYPES

order code	colour	length	LED pcs	LED power	power consumption*	weight
<b>L65407</b>	RGB	500 cm	300	72 Watt	64 Watt	0,2 kg

Custom length. More information about special length and customizing see [HERE](#).

<b>L65407Z</b>	RGB	per meter (max. 5 m)	60 per m	14,4 Watt per m	max. 14,4 Watt per m	0,04 kg
----------------	-----	-------------------------	-------------	--------------------	-------------------------	------------

\*Actual power consumption

MEMBER OF THE PROLED GROUP