


PROLED®


Flex Strip 800 Mono



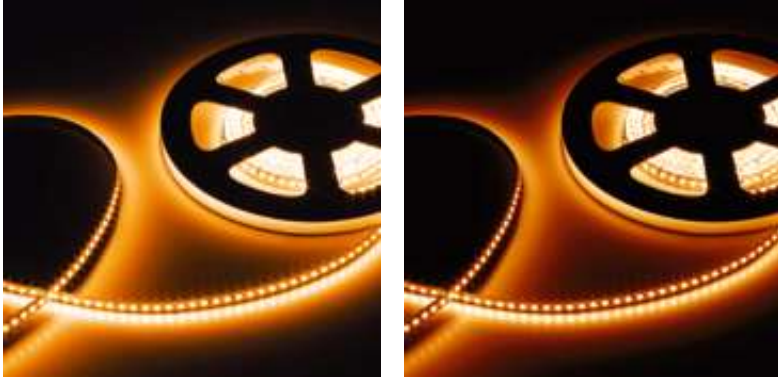

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities.

- High flexibility – adaptable to round shapes
- Installation with 3M adhesive tape on the strip's backside (self adhesive).
- dimmable and controllable via DMX 512, DALI, KNX, 1-10 V, CASAMBI, RF by MULTI power supplies/controller

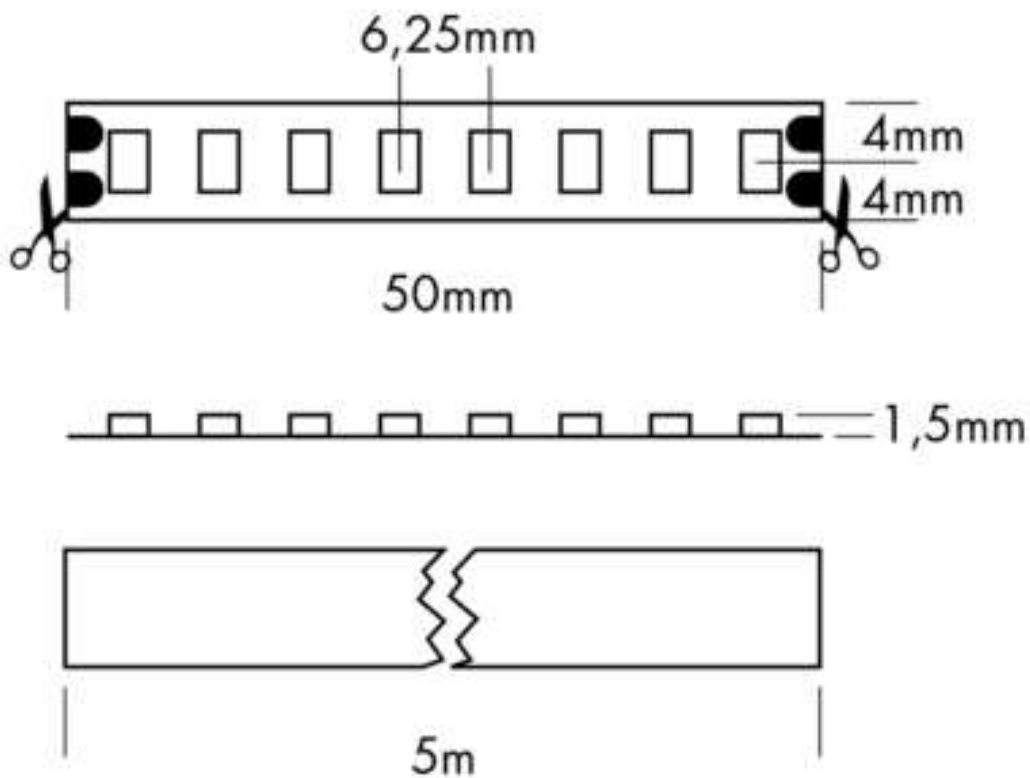

PROLED FLEX STRIP IP20+IP53+IP68 MANUAL (1.3 MB)

EULUMDAT/IES INFORMATION

ORDER EXAMPLE SPECIAL LENGTHS

5 YEARS WARRANTY INFORMATION

"UL-LISTED" INFORMATION

"REEL TO REEL" INFORMATION

TECHNICAL DATA

IP classification	IP20
Power source	24 VDC
Electrical connection	2x cable with 2-PIN to open wires
Maximum quantity per power input	5 m
Average lifetime*	50.000 h at L80/B10
Operating temperature range	-10° C till +45° C
Width x height	8 x 1,5 mm
min. Bending radius	20 mm
Cuttable	all 8 LEDs (5 cm)

*With correct installation and a suitable thermal management.

PHOTOMETRIC DATA

LED type	SMD LEDs
Luminous flux	white 1400 Lumen per m neutral white 1400 Lumen per m warm white 1300 Lumen per m super warm white 1200 Lumen per m ultra warm white 1100 Lumen per m ambiance white 900 Lumen per m
Colour temperature	white 6000 K neutral white 4000 K warm white 3000 K super warm white 2700 K ultra warm white 2400 K

ambiance white 2100 K

CRI	90
Beam angle	120°

Due to conditions of production photometric data can vary from production batch to production batch within the EU directive.

PRODUCT TYPES

order code	colour	length	LED pcs	LED power	power consumption*	weight	EEC
L68904	white	500	800	50	45 Watt	0,09	E
		cm		Watt		kg	
L68908	neutral	500	800	50	45 Watt	0,09	E
	white	cm		Watt		kg	
L68906	warm	500	800	50	45 Watt	0,09	E
	white	cm		Watt		kg	
L68926	super	500	800	50	45 Watt	0,09	E
	warm	cm		Watt		kg	
	white						
L68936	ultra	500	800	50	45 Watt	0,09	F
	warm	cm		Watt		kg	
	white						
L68946	ambiance	500	800	50	45 Watt	0,09	G
	white	cm		Watt		kg	

Custom length. More information about special length and customizing see [HERE](#).

L68904Z	white	per meter	160 per m	10 Watt	max. 10 Watt per m	0,02 kg	E
---------	-------	--------------	-----------------	------------	-----------------------	------------	---

order code	colour	length	LED pcs	LED power	power consumption*	weight	EEC
		(max. 5 m)		per m			
L68908Z	neutral	per	160	10	max. 10 Watt	0,02	E
	white	meter	per	Watt	per m	kg	
		(max. 5 m)	m	per m			
L68906Z	warm	per	160	10	max. 10 Watt	0,02	E
	white	meter	per	Watt	per m	kg	
		(max. 5 m)	m	per m			
L68926Z	super	per	160	10	max. 10 Watt	0,02	E
	warm	meter	per	Watt	per m	kg	
	white	(max. 5 m)	m	per m			
L68936Z	ultra	per	160	10	max. 10 Watt	0,02	F
	warm	meter	per	Watt	per m	kg	
	white	(max. 5 m)	m	per m			
L68946Z	ambiance	per	160	10	max. 10 Watt	0,02	G
	white	meter	per	Watt	per m	kg	
		(max. 5 m)	m	per m			

*Actual power consumption

MEMBER OF THE PROLED GROUP