




SERIES TOP-TER
EMPTY DISTRIBUTION BOARD
CODE 579865

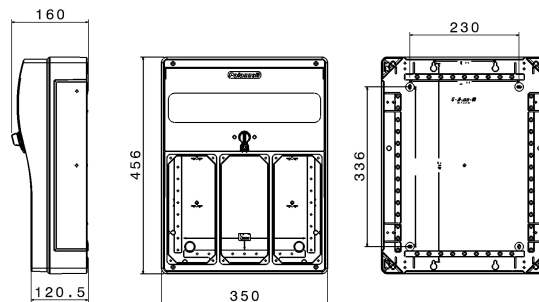

Datasheet

Electrical characteristics

Insulation Class	II
Rated insulation voltage	690V
Dissipable Power	56W

Reference Standards and Directives

Certification and approval marks NYCE COLOMBIA, UKCA, CE

Directives 2014/35/EU (LVD)

Reference Standards EN 62208:2011

Mechanical characteristics

Manufacturing material	Technopolymer Recyclable Palazzoli
Color	Grey RAL 7035
Execution	Wall mounting
Door type	-
Number and type of closures	1 rotary lever closure
N. of modules on DIN rail	16
IP Protection degree	IP66
Shock resistance	IK08 according to IEC/EN 62262
Resistance to Glow wire	650°C
Flame rating according UL94	HB
Corrosivity category	-
Working Environment Temp.	Min: -25 °C ;Max: +50 °C
Warehousing Temperature	Min: -30 °C ;Max: +70 °C
Dimensions	350X456X160 mm
Internal dimensions	-
Net Weight	2.9 KG
Maximum permissible load	On the bottom: 0 kg, On the doors: 0 kg, Mounting surfaces: 20 kg

The images are purely indicative. Palazzoli reserves the right to make changes without notice.