

ToLEDo GLS
ToLEDo GLS V7 1055LM 827 E27 SL
0029589



- Product features**
- Compact and elegant design
 - Suitable replacement for halogen, incandescent and compact fluorescent lamps
 - Instant light at the flick of a switch
 - Uniform light distribution
 - Good colour rendering (CRI 80)
 - Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
 - Lower maintenance costs
 - 15,000 hours average rated life



PRODUCT OVERVIEW

Product name	ToLEDo GLS V7 1055LM 827 E27 SL
Technology	LED
Watt (Rated) (W)	9.5
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740982
Warranty	3 years
Luminous flux (lm)	1055
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Wattage (W)	9.5
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288295893

DATA TABLE

General data	
Product name	ToLEDo GLS V7 1055LM 827 E27 SL
Technology	LED

ToLEDo GLS

ToLEDo GLS V7 1055LM 827 E27 SL

0029589

Watt (Rated) (W)	9.5
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4740982
Warranty	3 years

Optical data

Luminous flux (lm)	1055
Luminous flux (Rated) (lm)	1055
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	9.5
Equivalent watt (W)	75
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	4
Inrush Duration (µs)	380
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	40
Max. products per 16A B Breaker	20

Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	109
Nominal Product Diameter (mm)	60
Weight (kg)	0.03

ToLEDo GLS
ToLEDo GLS V7 1055LM 827 E27 SL
0029589


Packaging

Single packaging type	Carton
Product EAN number	5410288295893
Packaging single length / height (cm)	6.0
Packaging single width (cm)	6.0
Packaging single depth (cm)	11.2
DUN14 (outer)	15410288295890
Units per outer package	6
Packaging outer length / height (cm)	18.8
Packaging outer width (cm)	12.7
Packaging outer depth (cm)	12.0


Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

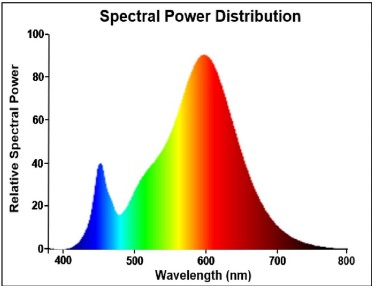

TECHNICAL DRAWINGS



ToLEDo GLS
ToLEDo GLS V7 1055LM 827 E27 SL
0029589

**ENERG**

SYLVANIA

0029589



10
kWh/1000h



2019/2015


ToLEDo GLS
ToLEDo GLS V7 1055LM 827 E27 SL
0029589



ENERG

SYLVANIA

0029589

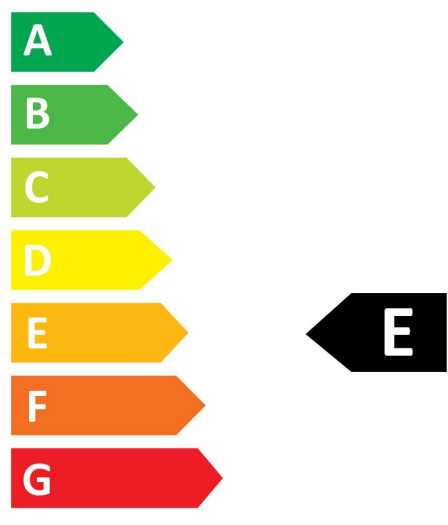

10
kWh/1000h

