


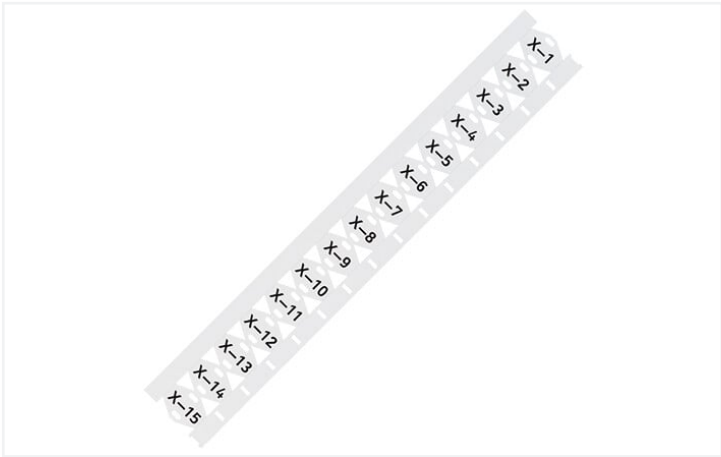

Color: white

Technical data	
Marking method	Thermal transfer
Marking	plain
Delivery form	Roll
Delivery form configuration	500 pcs/reel; 1 line
Printing device	Smart Printer (thermal transfer printer)

Physical data	
Height	20 mm
Width	25 mm
Depth	0.17 mm
Marking surface	25 x 11 mm

Mechanical data	
Mounting type	Mounting with cable ties
Smear resistance	in conjunction with 258-5005 Ink Ribbon

Material data	
Color	white
Material	Polyester
UV resistance	EN 60068-2-5:2010 Procedure B
Adhesive information	without adhesive
Halogen-free	Yes
Weight	129.5 g
Fire load	0 MJ



Environmental requirements	
Ambient temperature (storage)	+10 ... +21 °C
Ambient temperature (operation)	-40 ... +150 °C
Relative humidity	40 ... 50 %

Commercial data	
Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-40-04-01
eCl@ss 9.0	27-40-06-29
ETIM 8.0	EC001530
ETIM 7.0	EC001530
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821688648
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 211-835

↓

Documentation			
Operating Instructions			
211-835 Information on printing material	1 28.08.2020	pdf 1380.62 KB	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking device



Item No.: 258-5000
Thermal transfer printer; Smart Printer; for complete control cabinet marking; 300 dpi; With marking material