


START eco Surface IP44

START ECO SURFACE IP44 1500LM 830
0043116



Product features

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyer. Even and uniform light distribution with a halo lighting effect on the wall surface. Body Size diameter 330mm. Power 17W, output 1500 lumens. Supplied with LED driver (non-dimmable). IK03 PC diffuser. Low maintenance with 30,000 hours LED life expectancy

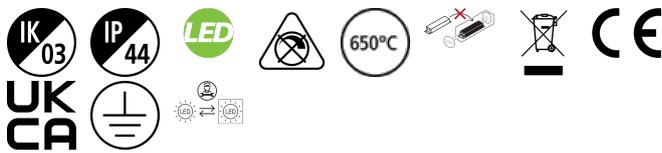


PRODUCT OVERVIEW

Product name	START ECO SURFACE IP44 1500LM 830
Technology	LED
Housing	Aluminium
Mount	Ceiling surface mounting
Environment	Indoor
General application	Residential & Consumer
ETIM Class	EC002892
E-number FI	4170564
Warranty	3 years
Useful luminous flux (Fuse)	1500
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	88
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Housing colour	White
IP rating	IP44
IK rating	IK03
Product EAN number	5410288431161

PHOTOMETRY

START eco Surface IP44 START ECO SURFACE IP44 1500LM 830 0043116




0.5	2.35 2.13	E01 E090 E100	1409 41 54
1.0	4.70 4.25	E01 E090 E100	352 10 14
1.5	7.14 6.38	E01 E090 E100	197 5 6
2.0	9.52 8.50	E01 E090 E100	88 3 4
2.5	11.83 10.63	E01 E090 E100	56 2 2
3.0	14.27 12.75	E01 E090 E100	39 1 2

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 133.9°)
— C90 - C270 (Half beam angle: 134.4°)

TECHNICAL DRAWINGS



Version	Ø	H
6W	180	75
12W	250	80
17/18W	330	96
24W	360	100