


Start Flood without PIR
Start Flood IP65 7000LM 840 Black
0050166



Product features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood IP65 a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 7000 lm, 58 W, 121 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 120000 hrs, 151 x 193 x 30 mm (L x W x H). Weight: 0.665 kg.

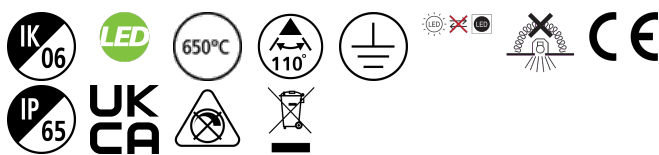

PRODUCT OVERVIEW

Product name	Start Flood IP65 7000LM 840 Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted, Ceiling surface mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579633
Warranty	3 years
Useful luminous flux (Fuse)	7000
Fixture luminous flux (lm)	7000
Luminaire efficacy (lm/W)	121
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	58
Electrical protection	Class I
Control gear type	Not required
Dimmable	No
Dimming method	N/A
Housing colour	Black
IP rating	IP65
IK rating	IK06
Product EAN number	5410288501666

DATA TABLE

General data	
Product name	Start Flood IP65 7000LM 840 Black
Technology	LED

Start Flood without PIR

Start Flood IP65 7000LM 840 Black
0050166

Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted, Ceiling surface mounting
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001744
E-number FI	4579633
Warranty	3 years

Optical data

Useful luminous flux (Fuse)	7000
Fixture luminous flux (lm)	7000
Luminaire efficacy (lm/W)	121
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	58
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear type	Not required
No. Of switching cycles before premature failures	>15000
Dimmable	No
Dimming method	N/A
Drive current (mA)	236
Inrush Current (A)	1
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	22
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	35
Max. products per 20A C Breaker	43
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	21
Max. products per 20A B Breaker	26

Start Flood without PIR

Start Flood IP65 7000LM 840 Black

0050166

Connectable conductor cross section - Min (mm²)	1
Connectable conductor cross section - Max (mm²)	1

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B50	104000
Lifespan L80 B20	75000

Physical data

Housing colour	Black
IP rating	IP65
IK rating	IK06
Diffuser finish	Transparent
Diffuser material	Glass
Reflector finish	White
Nominal Product Length (mm)	151
Nominal Product Width (mm)	193
Nominal Product Height (mm)	30
Weight (kg)	0.665

Packaging


Product EAN number	5410288501666
Packaging single length / height (cm)	20.5
Packaging single width (cm)	4.5
Packaging single depth (cm)	18.0
DUN14 (outer)	15410288501663
Units per outer package	6
Packaging outer length / height (cm)	30.0
Packaging outer width (cm)	20.2
Packaging outer depth (cm)	20.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

Start Flood without PIR
Start Flood IP65 7000LM 840 Black
0050166

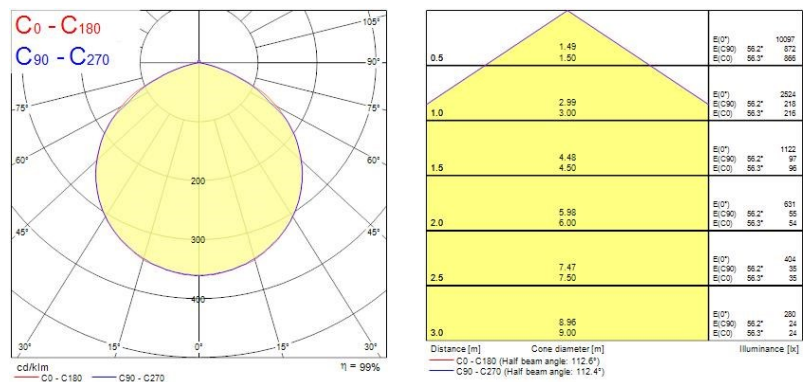

TECHNICAL DRAWINGS

