


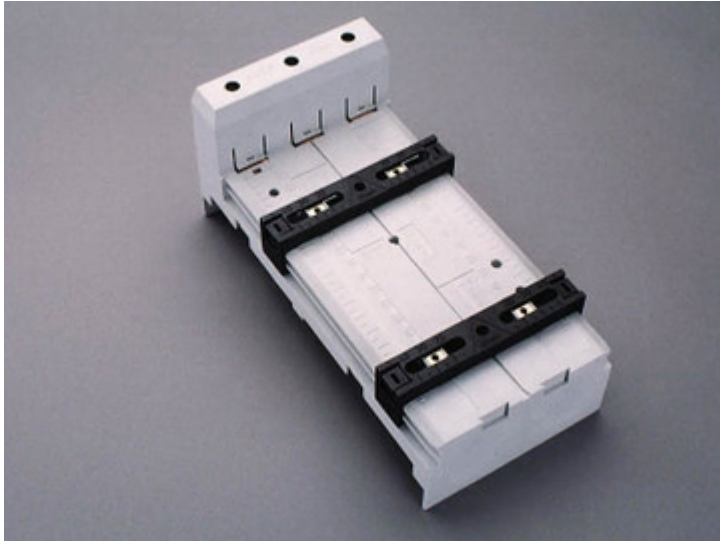

Description

Article

Part No.: 32 214

EQUES® 60Classic

adapter 200 A

terminals 70 mm² at top

108 x 222

System

60Classic

Product group 05

Untergruppe 36

pack size 1

EAN 4021267322144

catalog page 2015 : 2/17

Classification

eCl@ss 6.1 27370304

eCl@ss 7.1 27370304

ETIM 4.0 EC001531

ETIM 5.0 EC001531

Approvals

Standards

IEC 61439-1:2011

Approvals

CSA, UL, Germanischer Lloyd



Type number: 60200

UL file: E123577, UL category (for USA): NMTR2 <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR8 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

CCC approval: no certification required

Product data

Electrical data

Rated current (IEC): 200 A

Rated voltage (IEC) AC: 690 V

Rated current (UL): 200 A

Rated voltage (UL) AC: 600 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 10.6 W.

(The power dissipation for operation with rated current would be 16.6 W.)

rated isolation voltage U_i (AC): 800 V

Rated surge voltage U_{imp} : 6 kV

max. permitted voltage (IEC) AC: 800 V

max. permitted voltage (IEC) DC: 800 V

rated peak withstand current I_{pk} : 46.9 kA

Mechanical data

W x H x D: 108 x 222 x 39

Weight: 84.2 kg/100

Poles: 3-pole

Material properties


Body:

temperature stability 125°C,
self-extinguishing in acc. to UL 94,
creepage resistance CTI 200,
halogen-free

Reference

Movable fastening rails with M4 slide nuts for safe mounting of the switching devices.

Accessories



32 937

slide nut M5

for 32 168, 32 214, 32 215, 32 216
